



Owner's Manual

Nivus



Thank you for choosing Volkswagen

By purchasing this Volkswagen, you have become the owner of a vehicle fitted with the most up-to-date technology and a multitude of convenience functions for your use and enjoyment.

Before using your vehicle for the first time, carefully read and observe the information in this Owner's Manual to become familiar with your vehicle and all of its functions, in addition to learning about the potential dangers to yourself and others and how to avoid them.

If you have any further questions about your vehicle, or if you think that the manual set has not covered everything, please contact your local Volkswagen Dealership. Volkswagen Dealerships are always happy to deal with your questions, suggestions or issues.

We hope you have a great driving experience in your new vehicle. Happy motoring.

Volkswagen do Brasil



Table of Contents

About this Owner's Manual	4	Lights	
Description of symbols	5	– Turn signals	75
		– Driving lights	75
		– Interior lighting	78
Owner's Manual			
Overview of the vehicle		Visibility	
– Front view	6	– Window wipers and washers	79
– Rear view	7	– Mirrors	81
– Driver door	8	– Sliding headliner	84
– Driver's side	9		
– Centre console	10	Heating and air conditioning	
– Front passenger side	11	– Heating, ventilating, cooling	85
– Symbols in the roof headliner	11		
Driver's information		Driving	
– Warning lamps and indicator lamps	12	– Driving guidelines	92
– Instrument cluster	14	– Starting and stopping the engine	98
– Dash panel insert operation	25	– Start-Stop System	102
– Vehicle settings menu	26	– Manual gearbox	104
		– Automatic gearbox	106
Safety		– Uphill assist system	110
– Overall guidelines	27	– Steering assistance	111
– Adjusting the seat position	28	– Driving mode selection	112
– Seat belts	30		
– Airbag system	38	Driver assist systems	
– Transporting children in the vehicle	45	– Cruise control system (GRA)	113
– In an emergency	53	– Speed limiter	115
		– Adaptive Cruise Control (ACC)	116
Open and close		– Front Assist	121
– Vehicle key	56	– Lane keeping assist (Lane Assist)	125
– Keyless locking and starting system "Keyless Access"	58	– Semi-automated driving assistance (Travel Assist)	128
– Central locking button and doors	59	– "Blind spot sensor" (Blind Spot / Side Assist)	130
– Anti-theft alarm system	63		
– Interior monitoring system	64	Parking and manoeuvring	
– Boot lid	65	– Parking	133
– Windows	67	– Handbrake	134
		– Parking systems safety instructions	134
Steering wheel		– Park distance control (Park Pilot)	135
– Adjusting the steering wheel position	69	– Rear view camera system	137
		– Park Assist	139
Seats and head restraints		– Rear Traffic Alert	143
– Front seat	70	– Brake support systems	144
– Rear seats	71		
– Head restraints	72	Practical equipment	
– Seat functions	74	– Stowage compartment	147
		– Cup holder	151
		– Socket	152

Radio		
– Before using the unit for the first time	153	
– Other applicable documents	153	
– Convenience overview	153	
– Safety recommendations	154	
– Instructions for use	155	
– Power management	156	
– Anti-theft coding	156	
– Display	156	
Composition Touch (R 340G)		
– Device overview	157	
– Basic command information	158	
– Connectivity	160	
– Unit operation	163	
– Media mode	166	
– Wired or wireless connections	170	
– Phone	173	
– Settings	181	
VW Play		
– Welcome to VW Play	184	
– Device overview	184	
– Quick access screens	185	
– Radio	185	
– Media	186	
– Connect	187	
– App store	189	
– Apple CarPlay™	190	
– Android Auto™	190	
– Settings	191	
Transporting		
– Stowing items of luggage	195	
– Luggage compartment	195	
– Roof carrier	197	
– Towing a trailer	199	
Fuel		
– Fuel handling safety guidelines	204	
– Fuelling and fuel types	205	
– Engine control unit and exhaust gas emission control system	207	
– Fuel quality	210	
If and when		
– Vehicle toolkit	210	
– Window wiper blades	212	
– Exterior lighting	213	
– Fuses	216	
– Jump starting		222
– Tow starting and towing		224
Checking and refuelling		
– In the engine compartment		225
– Service fluids and consumables		229
– Washer fluid		230
– Engine oil		230
– Engine coolant		234
– Brake fluid		237
– Vehicle battery		238
Wheels and tyres		
– Tyre monitoring system		243
– Important information on wheels and tyres		245
– Changing a wheel		255
Maintenance		
– Service		260
– Vehicle conservation		262
– Accessories, modifications, repairs and part replacement		270
Consumer information		
– Volkswagen warranty		274
– Additional service offers		275
– Information stickers and plates		276
– Aerial and radio feed		276
– Installing the radio		276
– Headphones		277
– Declarations of conformity		277
Technical data		
– Guidelines on the technical data		279
– Information on fuel consumption		279
– Vehicle identification data		280
– Information on the air conditioner		281
– Dimensions		282
– Capacities		283
– Petrol engines		284
– TOTALFLEX engines		286
Abbreviations		287
Index		289

About this Owner's Manual

This Owner's Manual is valid for all available models and versions of this vehicle. The Owner's Manual describes all of the equipment and models, without identifying as special equipment or model variations. Thus, there may be pieces of equipment described which are not included in your vehicle or which are only available to specific markets. The equipment contained in your vehicle is detailed in the product's sale documentation. Contact your local Volkswagen Dealership for further information.

All data in this Owner's Manual correspond to the information available at the time of going to print. Due to continuous technical improvement of the vehicle, actual vehicle features and equipment may differ from the indications provided in this manual. No discrepancy in data, illustrations or descriptions shall form the basis for any legal claim.

Please ensure that the complete manual set is always in the vehicle when lending or selling the vehicle.

- An [alphabetical index](#) is included at the end of this manual.
- A [list of abbreviations](#) detailing technical terms and acronyms can be found at the end of the manual.
- [Directions and positions](#) such as left, right, front and rear are normally relative to the vehicle's direction of travel, unless otherwise indicated.
- [Illustrations](#) assist with orientation and should be regarded as schematic representations.
- [Short definitions](#) highlighted before some of the sections in this manual, summarize the functions and use of a system or piece of equipment. Further information on the systems and equipment, apart from their features, commands and system limitations, is found in the respective sections.
- Any technical changes made to the vehicle after publication of this booklet are provided in a [Supplement](#) that is included with the manual set.

Standard booklets in the manual set:

- Owner's Manual
- Service Registry Booklet (for markets without digital service plan) (*may not be available for some countries*)

Additional booklets in the manual set (optional):

- Supplement



Description of symbols



Refers to an excerpt within a chapter that contains important information and safety notes . Such reference must always be observed.



Indicates that the section is continued on the next page.



Indicates the end of a section.



Indicates situations in which the vehicle must be stopped as quickly as possible.



The symbol indicates a registered trademark. However, the absence of this symbol does not constitute a waiver of the rights concerning any term.



Symbols of this type reference warnings within the same section or page, indicating potential risks of accidents and injuries, as well as how they can be avoided.



Cross reference to information about possible damage to your vehicle within the same section or on a given page.

DANGER

Texts with this symbol indicate extremely dangerous situations, which may lead to fatal or severe injuries if you do not observe the warning.

WARNING

Texts with this symbol indicate dangerous situations which will lead to fatal or severe injuries if you do not observe the warning.

CAUTION

Texts with this symbol indicate dangerous situations, which may lead to light or severe injuries if you do not observe the warning.

NOTICE

Texts with this symbol indicate dangerous situations, which may lead to vehicle damages if you do not observe the warning.



Texts with this symbol are environment preservation recommendations.



Texts with this symbol contain additional information.



Overview of the vehicle

Front view

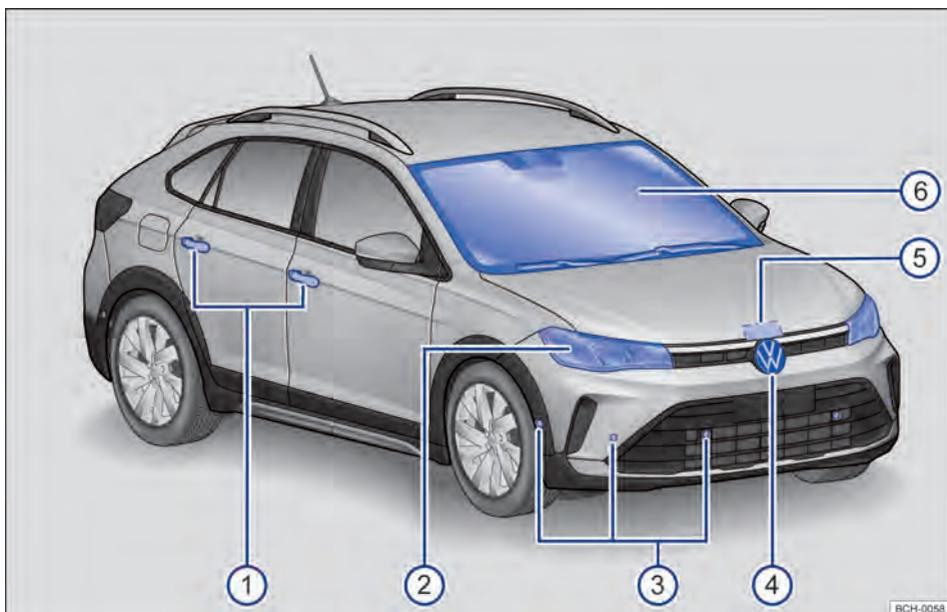


Fig. 2 Front view of the vehicle.

Key for → Fig. 2:

① Exterior door handles.....	59
② Headlights.....	75, 213
③ Front Park Distance Control sensors.....	135
④ Behind the VW logo: radar sensor of assist systems	
⑤ Bonnet release lever.....	227
⑥ Windscreen	
– Windscreen wipers.....	79
– Rain and light sensor in the region of the interior mirror.....	80 ◀

Rear view

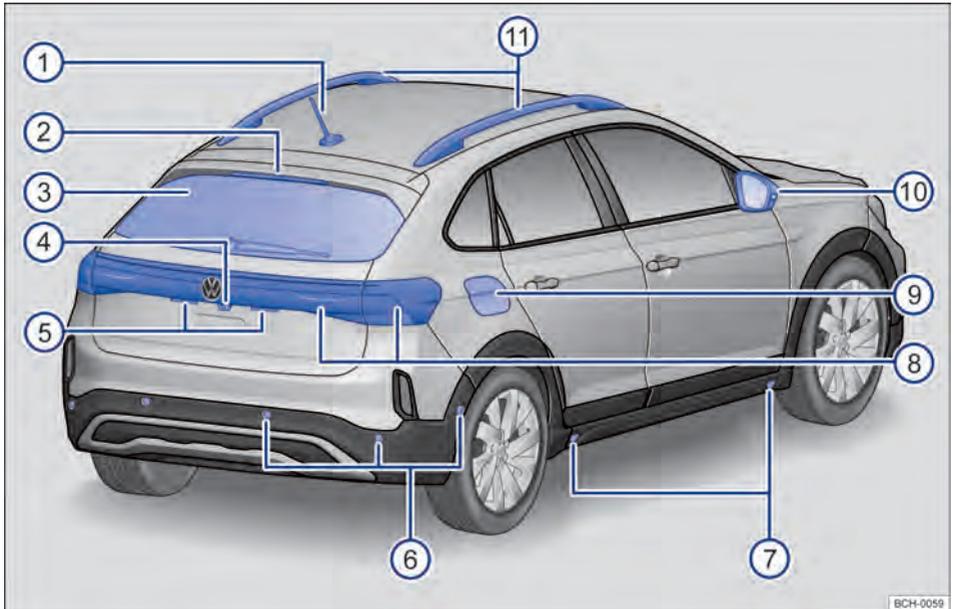


Fig. 3 Rear view of the vehicle.

Key for → Fig. 3:

① Roof aerial.....	274
② High-mounted brake light.....	
③ Rear window.....	
– Rear window heating switch.....	85
– Rear window wiper.....	79
④ Region for:	
Boot lid opening.....	65
Rear view camera system.....	137
⑤ Rear number plate lights.....	213
⑥ Right and left reflector (depending on version).....	75
⑦ Rear Park Distance Control sensors.....	135
⑧ Jacking points.....	257
⑨ Tank flap.....	206
⑩ Exterior mirrors.....	81
⑪ Roof railing.....	197

Driver door

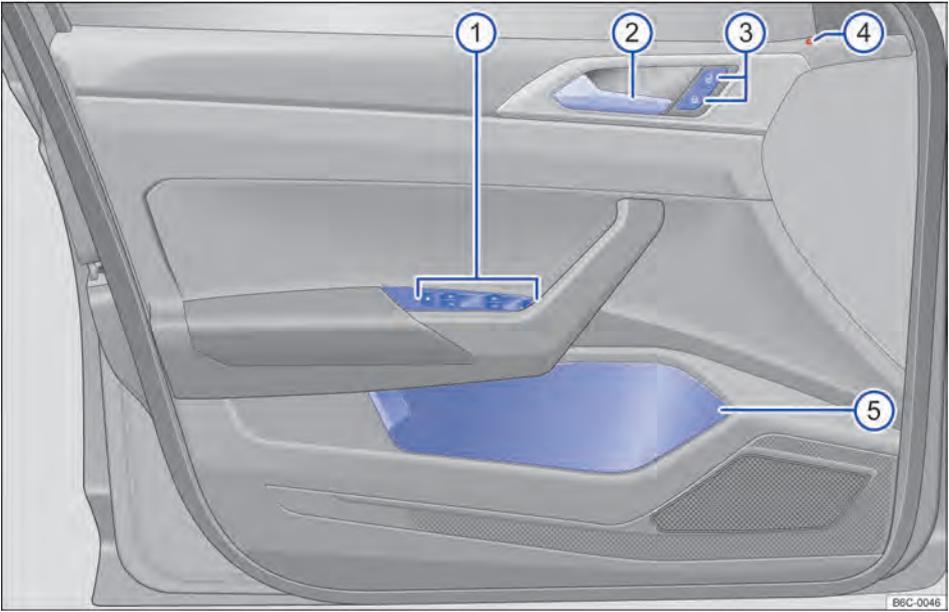


Fig. 4 Overview of the controls in the driver door.

Key for → Fig. 4:

① Region for:	
– Setting rotary control for electric exterior mirrors.....	81
– Buttons for operating electric windows.....	67
② Interior door handle.....	59
③ Central locking button for locking and unlocking the vehicle.....	59
④ Central locking indicator lamp.....	60
⑤ Storage compartment.....	147 ◀

Driver's side

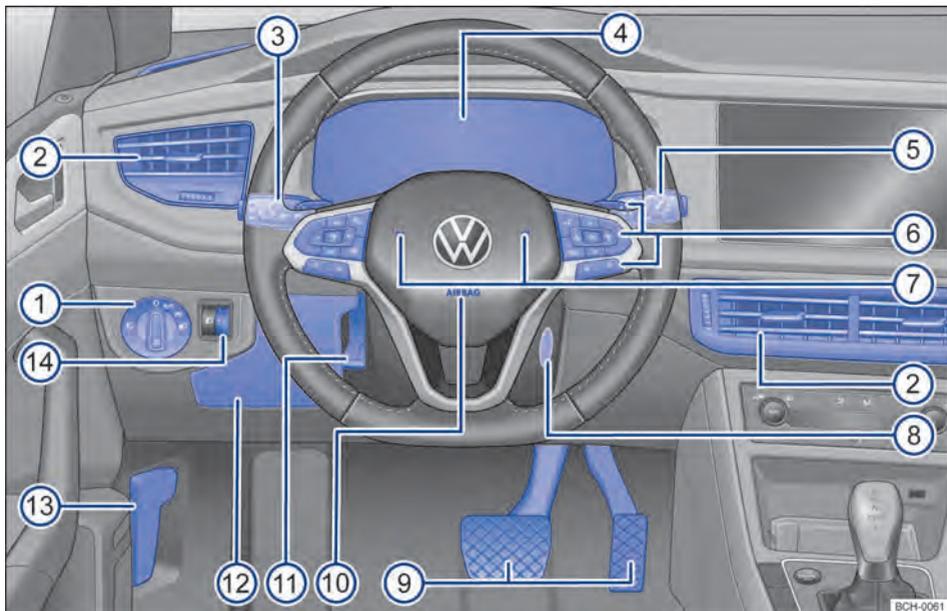


Fig. 5 Overview of the driver side.

Key for → Fig. 5:

① Light switch	75
② Air vents	85
③ turn signal and main beam lever	75
④ Instrument cluster	14
– with warning and indicator lamps	12
⑤ Lever for window wipers and washers	79
– with buttons to operate the TRIP, OK/RESET menus	25
⑥ Multifunction steering wheel controls:	
– Tiptronic paddles	107
– Audio, navigation $\llcorner \triangleright$	
– Cooperate the driver assistance systems RES, SET , Ⓢ , Ⓣ , - CNCL + or - CNL +	113
– Volume controls ⏮ , ⏭ , 🔊	
– Menu selection controls ⏏ OK , ⏴ , ⏵ , VIEW	25
– Voice command activation 🗣 (no function)	
– Telephone menu access or answering a phone call 📞	
⑦ Horn (works only when the ignition is switched on)	
⑧ Ignition lock	98
⑨ Pedals	92
⑩ Driver front airbag installation location	41
⑪ Steering column adjustment lever	69 ▶

12	Fuse box access cover.....	216
13	Bonnet release lever.....	227
14	Headlight range control switch.....	78 ◀

Centre console



Fig. 6 Overview of the upper section of the centre console.

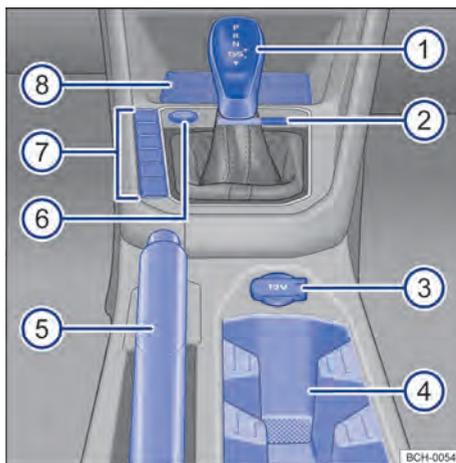


Fig. 7 Overview of the lower section of the centre console.

Key for → Fig. 6:

1	Radio.....	153
2	Front passenger front airbag deactivated indicator lamp OFF	39
3	Hazard warning lights button	53
4	Air vents.....	85
	– According to the version of the vehicle, there may exist air vents for the rear seat passengers.	
5	Climatronic or air conditioning operating controls.....	85

Key for → Fig. 7:

1	Lever for:	
	– Manual gearbox.....	104
	– Automatic gearbox.....	106
2	Card holder.....	147
3	12-volt socket.....	152
4	Stowage compartment with drink holder on the centre console.....	151
5	Handbrake lever.....	134
6	Engine starter button (Press & Drive).....	99 ▶

⑦	Depending on the vehicle's version, button for:	
	– Start-Stop system.....	102
⑧	Storage compartment	
	– with Qi wireless charging function.....	148 ◀

Front passenger side

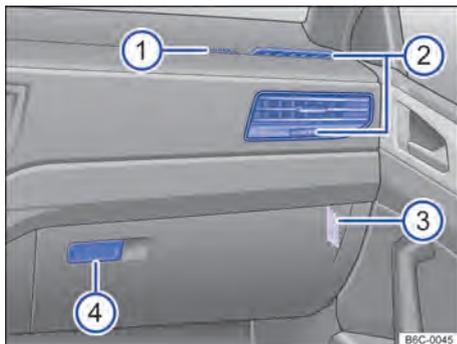


Fig. 8 Overview of the front passenger side.

Key for → Fig. 8:

①	Location of front passenger front airbag.....	38
②	Air vents.....	85
③	Vehicle key activated switch to deactivate the front passenger front airbag.....	42
④	Opening lever for the stowage compartment.....	147 ◀

Symbols in the roof headliner

Symbol	Definition
	Interior and reading lights switch buttons → page 75.

Driver's information

Warning lamps and indicator lamps

Warning and indicator lamps indicate a number of warnings → , faults →  or other specific functions. Some warning and indicator lamps light up when the ignition is switched on and should go out once the engine is running or the vehicle is in motion.

Depending on the vehicle's version, its equipment and the country, the warning lights may not come on, display additional text messages with more detailed information or prompts for some action, → page 14 or instead of a warning light, a symbol is displayed on the display of the instrument cluster.

Sound signals can also be heard when certain warning or indicator lamps light up.

Symbol	Meaning → 
	Central warning lamp. Observe the additional information displayed on the instrument cluster.
	Stop driving!
	Parking brake engaged. → page 134
	Stop driving!
	Brake fluid level too low or faulty brake system. → page 237
	Step on the brake pedal! → page 116
	Stop driving!
	Coolant temperature too high or engine coolant level too low. → page 234
	Stop driving!
	Engine oil pressure too low. → page 230
	Flashing: Stop driving! Steering damaged. → page 111
	On: electromechanical steering not working. → page 111
	Take over the steering immediately → page 128

Symbol	Meaning → 
	Brake or swerve! Collision warning via peripheral monitoring system (Front Assist) → page 121 Or: collision warning from pedestrian detection → page 122
	Rear Traffic Alert detected an obstacle when reversing → page 143
	Driver or front passenger seat belt not fastened. → page 30
	Fault in the alternator. → page 238
	Central warning lamp. Observe the additional information displayed on the instrument cluster.
	Lit: ESC damaged or switched off by the system. → page 144
	Flashing: ESC or TCS enabled and running. → page 144
	Traction control (TCS) manually disabled. → page 144
	Adaptive Cruise Control (ACC) not available. → page 116
	Semi-automated driving assistance (Travel Assist) active. → page 128
	Lane keeping assist (Lane Assist) off. → page 125
	Lane keeping system (Lane Assist) unavailable → page 127
	Lane keeping system (Lane Assist) in control → page 126
	Faulty blind spot sensor → page 130
	The Rear Traffic Alert brakes → page 143
	ABS faulty or not functioning. → page 144

Symbol	Meaning → ⚠
	Driving illumination partially or totally out of order. → page 213
	Fault in pollutant emission control system. → page 207
EPC	Fault in electronic engine output control. → page 207
	Damaged windscreen wipers. → page 81
	Collision warning disabled. → page 124
	Reduced electromechanical steering. → page 111
	Tyre pressure to low or damaged tyre pressure control system. → page 243
	Fuel tank almost empty. → page 17
	On: Engine oil level very low. → page 230
	Flashing: engine oil system damaged. → page 230
	Fault in front belt tensioner system or airbag. → page 38
	Faulty Driver Alert System (rest recommendation) → page 22
	Driver Alert System (rest recommendation) not available. → page 22
	Manual gearbox: excessive clutch temperature or damaged clutch. → page 104
	Automatic gearbox: damage in the automatic gearbox. → page 106
	Left or right turn signals. → page 75
	Hazard warning lights switched on. → page 53
	Emergency brake activation lights. → page 54
	On: Step on the brake pedal! (start the engine). → page 106

Symbol	Meaning → ⚠
	Flashing: the interlock button of the selector lever is not engaged. → page 106
	Cruise control system (GRA) on. → page 113
	Lane keeping assist (Lane Assist) active → page 125
	Semi-automated driving assistance (Travel Assist) active. → page 128
	Adaptive Cruise Control (ACC); no vehicle detected in front. → page 119
	Adaptive Cruise Control (ACC); vehicle detected in front. → page 119
	Main beam is switched on or the headlight flasher is being operated. → page 75
	Start-Stop system enabled. → page 102
	Start-Stop system not available. → page 102
	Manual gearbox: the clutch does not transmit the total torque of the engine. → page 104
	Service reminder or service about to become due. → page 24
	Take over the steering → page 128
	Charge status of the connected mobile phone battery. Only when activated by the factory-fitted mobile phone interface → page 153.
	Outside temperature below +4° C. → page 19
	Front Assist system startup. → page 124
	Distance warning. → page 123
	Cruise control system on. → page 113
	Cruise control system (GRA) damaged. → page 113

Symbol	Meaning → 
	Passive Adaptive Cruise Control (ACC); no vehicle detected in front. → page 119
	Passive Adaptive Cruise Control (ACC); vehicle detected in front. → page 119.
	Semi-automated driving assistance (Travel Assist) disabled → page 128
	Speed limiter on. → page 115
	Instructions regarding vehicle wallet information. → page 22

WARNING

Failure to observe the warning lamps could lead to your vehicle breaking down in traffic, and to accidents and serious injuries.

- Never ignore any warning lamps or text messages that appear.
- Stop the vehicle as soon as possible and when safe to do so.
- Stop the vehicle at a safe distance away from moving traffic and ensure that no part of the exhaust system can come into contact with any inflammable material underneath the vehicle, e.g. dry grass, fuel or oil, etc.
- Broken-down vehicles lacking due signalling increase the risk of accidents both for you and for other road users. Always switch on the hazard warning lights and set up the warning triangle to warn other road users.
- Before opening the engine compartment cover, switch off the engine and allow it to cool down sufficiently.

- The engine compartment of any motor vehicle is a dangerous area and may cause severe injuries → page 225, *Safety guidelines for work in the engine compartment.*

NOTICE

Failure to observe the illuminated indicator lamps could lead to vehicle damages.

Instrument cluster

Introduction

According to its version, the vehicle may be equipped with a digital instrument cluster (Active Info Display) version 1 or version 2.

After starting the engine with the vehicle's battery completely flat, or with a replacement battery in the vehicle, the system's configuration (time, date, comfort and programming configurations) may have been deleted or become corrupted. Check and adjust the settings after the vehicle battery has been sufficiently recharged.

WARNING

Accidents and injuries can occur if the driver is distracted.

- Never operate the instrument cluster's buttons while the vehicle is in motion.
- To prevent the risk of accidents and injuries proceed with all the settings of the indicators of the instrument cluster's display and those of the radio system's display only when the vehicle is stopped.

 Depending on the vehicle version, the date can be set via the digital instrument cluster or at a Volkswagen Dealership.

Digital instrument cluster (Active Info Display) - version 1

📖 Please refer to ▲ at the start of the chapter on page 14.



Fig. 9 Active Info Display (version 1) on the dash panel.

The Active Info Display is a digital instrument cluster with a high resolution colour TFT display. Through the selection of different information profiles other round classic instruments can be displayed, such as rev counter or speedometer.

According to the vehicle version, the digital instrument cluster and the trip data display functions may not be available.

Explanations to the instruments → Fig. 9:

- ① **Engine temperature indication** → page 18.
- ② **Rev. counter** (running engine speed in revolutions x 1.000 per minute) → page 17.
- ③ **Information profile indicator**. The displayed content varies according to the selected information profile.
- ④ **Display indicators** → page 19.
- ⑤ **Speedometer** (speed indicator).
- ⑥ **Fuel gauge** → page 17.
- ⑦ **Digital speed display**.
- ⑧ **Currently engaged gear or selector lever position** → page 106.

Information profiles

According to the radio version and the selected information profile, additional information is shown at the centre of the round instruments → Fig. 9 ③ of the Active Info Display.

Depending on the vehicle version, the radio may not be available.

For vehicles with Composition Touch, different topic-specific information profiles can be selected by way of the radio button on the function selection pad , select **Active Info Display**. The following information profiles can be selected:

- **Classic**: without additional displays.
- **Consumption & Fuel range**: digital display of average consumption and graphic display of the current fuel consumption in the centre of the rev counter. Digital fuel range display in the centre of the speedometer.
- **Efficiency**: digital display of average consumption and graphic display of the current fuel consumption in the centre of the rev counter.
- **Driver assist system**: graphic representation of different driver assist systems or digital travel time display in the centre of the rev counter. Arrow navigation or compass display in the centre of the speedometer.

OR

For vehicles with VW Play, on the main screen of the radio display, drag left once and select **Active Info Display**. The following information profiles can be selected:

- **Standard**: no additional displays.
- **Profile 1**: the profile can be configured based on the user's preferences.
- **Profile 2**: the profile can be configured based on the user's preferences.

To configure **Profile 1** or **Profile 2**, select one of the profiles on the radio display:

- ① Touch one of the round instruments to open the indicator menu.
- ② The following indicators can be selected:
 - Range
 - Audio

- Acceleration
- Indicator
- Distance covered
- Travel time

- ③ Next, click **SAVE** to save the changes made to the profile.

Digital instrument cluster (Active Info Display) - version 2

📖 Please refer to ⚠ at the start of the chapter on page 14.

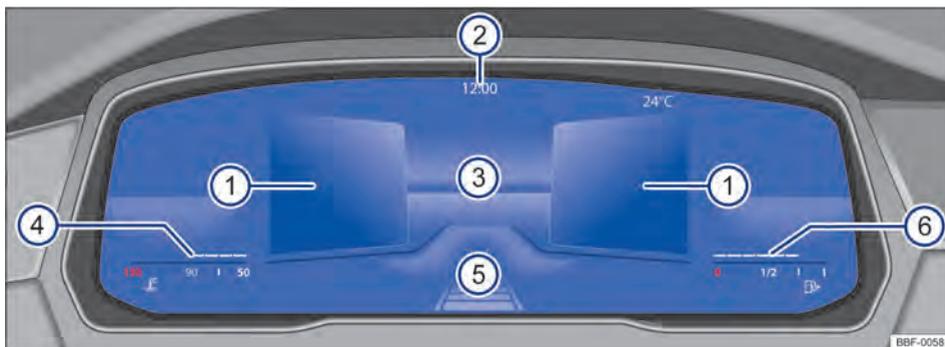


Fig. 10 Active Info Display (version 2) on the dash panel.

The Active Info Display is a digital instrument cluster with a high resolution colour TFT display. Additional content may be displayed by selecting different profiles and indicators.

Depending on the vehicle version and country, the digital instrument cluster and the trip data display functions may not be available.

Explanations to the instruments → Fig. 10:

- ① Information profile indicator.
- ② Time and temperature.
- ③ Main display area.
- ④ Currently engaged gear or selector lever position.
- ⑤ Driver assistance enabled..
- ⑥ Range.

Main indicator

Depending on the vehicle version, the information available in the cluster may not be available.

The main display → Fig. 10③ can be switched by pressing **[View]** on the multifunction steering wheel. The representation in the display area can show the following views:

- **Summary:** after completing the readiness check: displays information on vehicle status in areas ①, such as current mileage.
- **Digital view:** digital speedometer with information profiles.
- **Speed:** classic speedometer representation as a round gauge.
- **Rev. counter:** classic rev. counter representation as a round gauge.

Information profiles

The information profiles ① can be configured or hidden separately from each other. Multiple data can be displayed on driving, navigation warnings or information regarding audio playback or the phone interface.

Tachometer (Rev counter)

📖 Please refer to ⚠ at the start of the chapter on page 14.

Rev counter

The start of the red zone on the rev counter indicates the maximum engine speed of a run and warm engine for each selected gear. Change to the next higher gear, position the selector lever to **D/S** or relieve the accelerator pedal before the needle reaches the red zone → ④.

! NOTICE

- While the engine is cool, avoid high rotations, total acceleration and increased engine load.
- To avoid engine damages, the rev. counter needle must not remain in the red area of the scale for more than a short period of time.

🌿 Switching to higher gears in advance helps save fuel and reduce operating noises. <

Selecting driving profiles:

- In the multifunction steering wheel, press **[⏪]** or **[⏩]** to select the right or left information profile area.
- Use the arrow buttons **[▲]** or **[▼]** to select the desired information profile.
- Press **[OK]** to confirm the selection.

Selecting driving profiles in the round gauge:

- To select a driving profile in the main display ③ with view adjusted to round gauge, proceed as follows:
- Use the arrow buttons **[▲]** or **[▼]** to select the desired information profile.
- Press **[OK]** to confirm the selection. <

Fuel gauge

📖 Please refer to ⚠ at the start of the chapter on page 14.

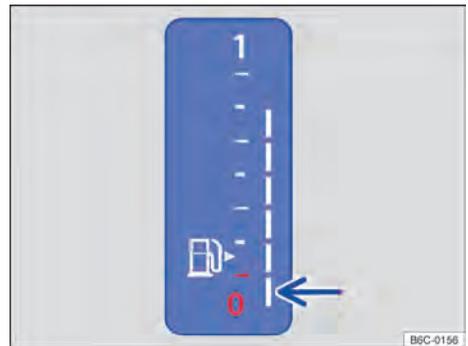


Fig. 11 On the digital instrument cluster: fuel gauge (version 1). >



Fig. 12 On the digital instrument cluster: fuel gauge (version 2).

The fuel gauge may vary depending on the vehicle model → Fig. 11 or → Fig. 12.

Fuel tank almost empty

The yellow indicator lamp must light up. The reserve fuel (red mark) will be consumed → .

- Fill the tank as soon as possible → .

When switching the ignition on, certain warning and indicator lamps flash to check functions. Such lamps go out after a few seconds.

WARNING

Driving the vehicle when the fuel level is too low could lead to your vehicle breaking down in traffic, accidents and serious injuries.

- When the fuel level is too low, the fuel supply to the engine could be irregular, especially when driving up or down hills and inclines.
- The steering, all driver assist systems and brake assist systems will not function if the engine stops due to a lack of fuel or irregular fuel supply.
- Always fill the tank when it is still 1/4 full. This reduces the risk of running out of fuel and breaking down.

NOTICE

- Failure to observe the illuminated indicator lamps and its descriptions and meanings could lead to vehicle damages.
- Do not run the tank completely empty. Irregular filling periods can cause backfiring and allow unburnt fuel to enter the exhaust system. This could damage the catalytic converter!

The small arrow next to the fuel pump symbol → Fig. 11 or → Fig. 12 in the display instrument indicates the side of the vehicle on which the tank flap is located.

Engine coolant temperature indicator

Please refer to at the start of the chapter on page 14.

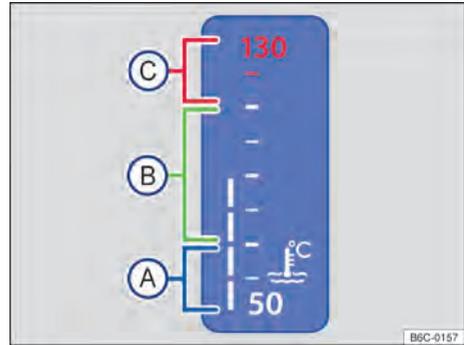


Fig. 13 Engine coolant temperature display on the digital instrument cluster: (A) cold zone; (B) normal zone; (C) warning zone.



Fig. 14 Engine coolant temperature indicator in the digital instrument cluster (version 2): (A) cold zone; (B) normal zone; (C) warning zone.

The engine coolant temperature indicator may vary depending on the vehicle version → Fig. 13 or → Fig. 14.

- A Cold zone.** The engine has not yet reached its operating temperature. Avoid engine overloading and high rotation while the engine is cooled.
- B Normal zone.**
- C Warning zone.** Coolant temperature too high.

and Engine coolant

The red centre warning lamp is on. In addition a text message is displayed on the instrument cluster display.

The engine coolant level is not correct or the coolant system is faulty.

Stop driving!

- Stop the vehicle, turn the engine off and let it cool down.
- Check coolant level, if the level is low, refill with engine coolant → page 235.
- If the warning lamp remains lit despite the coolant level being correct, then there is a fault in the system. Contact a Volkswagen Dealership.

Display indicators - version 1

 Please refer to  at the start of the chapter on page 14.

On the dash panel insert display several different pieces of information may be displayed according to the version of the vehicle:

- Doors, bonnet and boot lid open
- Warning and information displays → page 21
- Distance displays
- Time
- Exterior temperature
- Selector lever positions (automatic gearbox) → page 106
- Gear recommendation → page 92
- Driving data indicator (multifunction display) and menus for several settings → page 25
- Service interval display → page 24
- Start-Stop system status indicator → page 102
- Engine code

Doors, bonnet and boot lid open

After unlocking the vehicle and during driving, the open doors as well as an open bonnet or an open boot lid are indicated on the display of the instrument cluster as well as announced by sound alarms. The screen may vary according to the version of the fitted instrument cluster.

Distance displays

The *odometer* records the total distance travelled by the car.

The *trip recorder (trip)* shows the distance travelled since the trip recorder was last reset. The last digit stands for 100 m.

- Use the multifunction steering wheel arrows  or , select the menu **Trip data**, select the **trip display** and briefly press **OK** on the multifunction steering wheel.

Exterior temperature indicator

Whenever the exterior temperature is below +4°C, a "snowflake symbol" ❄ appears on the exterior temperature indicator (ice on the road).

This symbol remains lit until the outside temperature rises above +6 °C → .

If the vehicle is parked or moving at a very low speed, the indicated temperature may be slightly higher than the actual exterior temperature, due to the heat generated by the engine.

The measurement range is -40°C to +50°C.

Selector lever positions (automatic gearbox)

The gear selected is displayed on the side of the selector lever and on the display in the instrument cluster. With the selector lever in **D/S** position as well as with Tiptronic, the respective selected gear may be indicated, if the case, on the instrument cluster → page 106.

Gear-change indicator

Depending on the vehicle version, a gear selection recommendation may be indicated on the instrument cluster display to optimize fuel savings → page 92.

Radio

In some versions, certain radio functions are indicated on the instrument cluster display only while the vehicle is running. ▶

Engine code

- Turn the ignition on without starting the engine.
- On the instrument cluster **Trip data** menu, select the **Fuel range** display.
- Hold the **OK** button on the multifunction steering wheel pressed for about five seconds, upon release, the **Services** menu will be displayed → page 23.
- Go to the **Engine code** menu item.

WARNING

There may be ice layers on roads and bridges even if the exterior temperature is above freezing temperature.

- There may be ice layers on roads even if the exterior temperature is above +4°C and the "snowflake symbol" is not indicated on the display.
- Never consider only the exterior temperature indicator!

Display indicators - version 2

 **Please refer to  at the start of the chapter on page 14.**

On the dash panel insert display several different pieces of information may be displayed according to the version of the vehicle:

- Doors, bonnet and boot lid open
- Warning and information displays → page 21
- digital
- Date and Time
- Radio displays
- Exterior temperature
- Selector lever positions (automatic gearbox) → page 106
- Gear recommendation → page 92
- Service interval display → page 24
- Low-power driving status
- Engine code
- Driver assist system display
- Cooling fan return display
- Driving data indicator (multifunction display) and menus for several settings → page 25

- Engine oil temperature
- Phone guidance

Doors, bonnet and boot lid open

After unlocking the vehicle and during driving, the open doors as well as an open bonnet or an open boot lid are indicated on the display of the instrument cluster as well as announced by sound alarms. The screen may vary according to the version of the fitted instrument cluster.

Automatic gearbox selector lever positions

The gear selected is displayed on the side of the selector lever and on the display in the instrument cluster. The gearshift pattern is shown when pressing the brakes or the selector lever on the instrument cluster → page 16.

Exterior temperature indicator

Whenever the exterior temperature is below +4°C, a "snowflake symbol" ❄ appears on the exterior temperature indicator (ice on the road). This symbol remains lit until the outside temperature rises above +6 °C → .

If the vehicle is parked or moving at a very low speed, the indicated temperature may be slightly higher than the actual exterior temperature, due to the heat generated by the engine.

The measurement range is -45 °C to +76 °C.

Gear-change indicator

Depending on the vehicle version, a gear selection recommendation may be indicated on the instrument cluster display to optimize fuel savings → page 92.

Fuel saving driving status

While driving, the instrument cluster display shows the vehicle's fuel saving driving status .

Engine code

- Open the **Service** → page 23 menu.
- Go to the **Engine code** menu item.

Radiator fan return display

This display is shown after completing the driving readiness check and if the radiator fan is in return. 

Subsequent radiator fan operation time may be conditioned by:

- Active brake cooling after downhill driving.
- Engine heat dissipation after high load (e.g. towing a trailer).

WARNING

There may be ice layers on roads and bridges even if the exterior temperature is above freezing temperature.

- There may be ice layers on roads even if the exterior temperature is above +4°C and the “snowflake symbol” is not indicated on the display.
- Never consider only the exterior temperature indicator!

Multifunction displays

 Please refer to  at the start of the chapter on page 14.

There are several representations of driving data available in the information profiles.

Depending on the vehicle version, different driving data may be displayed. Driving data displayed vary according to the driver's driving behaviour, the vehicle's conditions and the current driving conditions (e.g. urban traffic, highways). Driving data are determined as a medium value in sections of different lengths. Therefore, the value currently shown may differ from the actual medium value.

Resetting multifunction displays

- Press  or  to reset multifunction displays.
- Use the arrow buttons  or  to select the respective multifunction display in the settings menu.
- In the submenu, select **Restore data** and press  to confirm.

Phone

If the Phone information profile is enabled and a mobile phone is connected via Bluetooth[®], the instrument cluster display will show the Bluetooth[®] symbol. In addition, the symbol indicates the mobile phone's battery level.

 When not driving for more than two hours, the **Since start** memory is reset. The **Since refuelled** memory is reset after refuelling. The **Long term** memory is not reset automatically.

- The memory collects the driving data for up to 19 hours and 59 minutes or 99 hours and 59 minutes of travel time or 1,999.9 km or 9,999.9 km of driven distance. When one of these maximum marks is surpassed, the memory is deleted. The maximum marks vary according to the version of the instrument cluster.

 If warning messages are shown regarding operational faults after switching on the ignition, some settings or information displayed may be different than described. In this case, operating fault repairs must be made at a Volkswagen Dealership.

Warning and information texts

 Please refer to  at the start of the chapter on page 14.

The system runs a check on certain components and functions in the vehicle when the ignition is switched on or while the vehicle is in motion. Function faults are indicated by red and yellow warning symbols with warning and information text messages on the instrument cluster display (→ page 12), and, if required, also by acoustic alarms. The display of the icons and texts may vary according to the fitted instrument cluster.

Existing functional faults can also be accessed manually. To do so, access the **Vehicle status** menu → page 25.

Priority 1 warning message

The red central warning lamp blinks or is on - partly in association with warning buzzers or additional symbols.  **Stop driving!** Dangerous situation. Check the damaged function and eliminate its cause. Seek assistance from a Volkswagen Dealership, if necessary.

Priority 2 warning message

The yellow central warning lamp blinks or is on - partly in association with warning buzzers or additional symbols. Faulty functions or lack of fluids may damage or interrupt vehicle operation. ▶

Check the faulty function as soon as possible. Seek assistance from a Volkswagen Dealership, if necessary.

Guidance on information in the owner's manual

Further guidance on the current warning message can be found in the owner's manual.

Information text.

Information about various procedures within the vehicle.

 According to the version some adjustments and displays may be made/seen on the radio system.

 When there are several warnings, the icons will be displayed in sequence a few seconds each. The symbols will appear until the faults are rectified.

Driver alert system (interval recommendation)

 Please refer to  at the start of the chapter on page 14.



Fig. 15 On the instrument cluster display: driver alert system icon.

The driver alert system warns the driver when his driving attitude indicates tiredness.

Depending on the vehicle version, the driver alert system indicator may not be available.

Function and operation

The driver alert system senses the driving behaviour at the beginning of a trip and from this derives possible weariness indications. This is constantly compared to the actual driving behaviour. Should the system detect signs of fatigue of the

driver, it sounds a “gong” alarm and displays a visual warning with an icon → Fig. 15 on the display of the instrument cluster together with a supplementary text message. The text message on the instrument cluster display is displayed for about 5 seconds and, if necessary, is repeated once. The last message is saved by the system.

The message on the instrument cluster display can be turned off by pressing the **OK/RESET** button on the wipers lever or the **OK** button on the multifunction steering wheel → page 25. The message on the instrument cluster display may be accessed again through the multifunction indicator → page 21.

Operating conditions

Driving behaviour is only assessed at speeds between 60km/h and approximately 200km/h.

Turning on and off

Depending on the vehicle and the radio version, the Driver Alert System can be activated or deactivated through the radio system, through the  function button. Simply touch the function button  → page 26.

Operating limitations

The alertness detection system has system limitations. The following conditions may cause the alertness detection system to operate only in a limited way or not to operate altogether:

- Speeds below 60 km/h.
- Speeds above 200 km/h.
- Curvy stretches.
- Roads in poor condition.
- Unfavourable climate conditions.
- When the driver is too inattentive.

Under the following conditions the driver alert system gets reset:

- Ignition is turned off.
- Driver's safety belt is loose and the driver door is open.
- The vehicle is standing still for over 15 minutes.

When driving over a longer period at low speed (less than 60 km/h), the assessment is automatically reset by the system. When driving faster later on, the driving behaviour is recalculated. 

WARNING

The intelligent alertness detection technology is not able to overcome physical limitations and operates only within the limitations of the system. The higher level of convenience provided by the alertness detection system should not encourage the driver to take risks. When driving over longer distances take regular and long enough breaks.

- The driver is ultimately always responsible for his driving capacity.
- Never drive a vehicle when tired.
- The system does not recognize a low level of alertness under all circumstances. Observe the information provided in section "Operational limitations" → page 22.
- In some situations the system may incorrectly interpret an intentional driving manoeuvre for lack of alertness from the driver and an indication for weariness.
- No critical alarm is sounded for the so called "microsleep (napping at the steering wheel)" episodes!
- Pay attention to the indications on the instrument cluster display and follow the corresponding instructions.

 The alertness detection system was solely developed for driving on highways and well paved roads.

 In case of malfunction, seek assistance from a Volkswagen Dealership.

Time

 Please refer to  at the start of the chapter on page 14.

Time setting by way of the radio system

Depends on the radio and vehicle version.

- Press the radio  button.
- Touch the function button  to open the Vehicle Settings menu.
- Select the menu item **Date and time** to set the time → page 26.
- **OR**
- Touch the  function button.

- Touch the  function button to open the menu.
- Select the menu item **Date and time** to set the time → page 23.

Time setting by way of the digital instrument cluster (Active Info Display - version 1)

- On the menu **Trip data**, select the **Range** display.
- Keep the  button on the multifunction steering wheel pressed for about five seconds, upon release, the services menu will be displayed on the digital instrument cluster display → page 23.
- Select the **Time** menu.
- Set the time with the arrow buttons  or .

Time setting by way of the digital instrument cluster (Active Info Display - version 2)

- Open the **Service** → page 23 menu.
- Select the **Time** menu
- Select the **Time** menu.
- Set the correct time with the  button. 

Services Menu

 Please refer to  at the start of the chapter on page 14.

Depending on the vehicle version, settings may be configured using the **Service** menu of the digital instrument cluster (Active Info Display). 

Open the Service menu in the digital instrument cluster (version 1)

On the **Journey data** menu of the instrument cluster select the **Range** indicator and keep the  button on the multifunction steering wheel pressed for about five seconds, upon release the **Service** menu is displayed. Browse through the menu using the multifunction steering wheel buttons.

Open the Service menu in the digital instrument cluster (version 2)

Access the **Travel type/trip** information profile. On the **Travel type/trip**, press and hold  or  on the multifunction steering wheel in the same direction for 6 seconds. Browse through the menu using the arrow buttons  and . 

Reset the service interval display

Select the **Service** menu and follow the instructions on the digital instrument cluster display.

Reset the oil change service

Select the **Reset oil service** menu and follow the instructions on the digital instrument cluster display.

Reset the inspection service

Select the **Reset inspection** menu and follow the instructions on the digital instrument cluster display.

Reset the trip recorder in the digital instrument cluster (version 1)

To reset the trip recorder, select the **Reset trip** menu and follow the instructions on the digital instrument cluster display.

Engine code

Select the **Engine code** menu. The engine code is displayed on the digital instrument cluster display.

Set the time

Select the **Time** menu and set the correct time with the arrow buttons  or .

Copyrights

Select the **Copyright** menu to access copyright information.

Service reminder

When a **service is about to become due** a warning is sounded and, for a brief instant, the wrench icon  may be displayed on the instrument cluster display along with other displays:

Access the service deadline

With the ignition turned on and the vehicle stationary, it is possible to access the current service deadline.

Service deadline access via the radio system, depends on the vehicle and radio versions.

- Press the radio  button.
- Touch the function button  to open the **Vehicle Settings** menu.
- Select the **Service** item on the menu to display the service information.
- **OR**
- Touch the  function button.
- Touch the  function button to open the menu.
- Select the **Service settings** item on the menu to view service information.

Checking the service interval on the digital instrument cluster (Active Info Display).

- The interval can be consulted via the **Services** menu → page 23.

◀ Resetting the service interval display

If the service was not performed by a Volkswagen Dealership, the instrument cluster display can be reset as follows:

- The service interval display can only be reset via the **Service** menu → page 23.

Do not reset the display between service intervals. This may result in incorrect displays.

 The service message will disappear after a few seconds with the engine running or after pressing the  button on the multifunction steering wheel. ▶

Service interval display

 **Please refer to  at the start of the chapter on page 14.**

The service interval indicators show on the instrument cluster display or on the radio system display.

There being different instrument cluster and radio system versions available, display indications may vary.

Service warning

When a service is becoming due, a service warning is displayed when turning the ignition on.

The mileage or specified interval time correspond to the mileage or interval until the next service.

Dash panel insert operation

Introduction

Some menu options can only be called up when the vehicle is stationary.

The multifunction display is operated exclusively through the multifunction steering wheel buttons.

⚠ WARNING

Drivers distracted while driving could lead to accidents and injuries.

- Never access the instrument cluster menus while the vehicle is in motion.

Dash panel insert menus

Please refer to ⚠ at the start of the chapter on page 25.

The scope of the menus and information indicators depends on the electronic components shipped with the vehicle and vehicle version scope.

Some menu options can only be called up when the vehicle is stationary.

Travel data → page 21

Audio → page 153

Phone → page 153

Vehicle status → page 25

Operation by way of the multifunction steering wheel

Please refer to ⚠ at the start of the chapter on page 25.



Fig. 16 Right hand side of the multifunction steering wheel (version 1): menu operation and instrument cluster information exhibit buttons.



Fig. 17 Right hand side of the multifunction steering wheel (version 2): menu operation and instrument cluster information exhibit buttons.

The menu cannot be opened while a priority 1 warning → page 21 message is displayed. All warning messages automatically disappear after a few seconds. In addition, some warning messages can be confirmed and hidden using the **OK** button on the multifunction steering wheel → Fig. 17.

Menu or information screen selection

- Switch on the ignition.
- When a message or the vehicle pictogram is displayed, press the **OK** → Fig. 17 button, case required press several times.

- To display and navigate the menu press the  or  → Fig. 17 button.
- To access the menu or the information display screen, press the  → Fig. 17 button or wait a few seconds for the menu or the information screen to open on its own.

Changing the menu settings

- On the displayed menu use the arrow buttons  or  → Fig. 17 to select the desired item.
- Press  → Fig. 17 to confirm the selected change. A “tick-off sign” indicates that the function or system is enabled.
- When the selection box on the function button is ticked off , the corresponding function is enabled.

Returning to the main menu

Press the  button or select Return menu item.

VIEW button in the multifunction steering wheel

Vehicles with digital instrument cluster (Active Info Display - variant 1): The  → Fig. 17 button can be used to switch between the classic representation of round instruments and the enlarged view with highlighted information profiles. In the classic view, large round indicators are shown to the left and right, and the selected information profile is displayed in the middle. Press and hold the  button to select the list of preset information profiles

(Clássico) View without information profiles.

(Automático) Information profiles adapt to the chosen driving profile. Only in vehicles with driving profile selection.

Entrada de memória 1, 2 e 3  Individual selection of information profiles.

 For vehicles without a radio, the controls for the multifunction steering wheel are deactivated. If an original Volkswagen radio is subsequently installed at a Volkswagen Dealership, it is possible to activate the controls on the multifunction steering wheel.

Vehicle settings menu

Introduction

In the Infotainment system vehicle settings, you can switch individual functions and systems on and off as well as carry out settings.

Accessing the Vehicle settings menu

- Switch on the ignition.
- Case required turn the radio system on.
- Press the radio  button.
- Touch the function button  to open the Vehicle Settings menu.
- Touch the respective function buttons on the Vehicle settings menu to access other menus or to configure the menu items.

System configurations and vehicle information exhibits

Depending on the vehicle version, some information and settings can be performed on the main radio screen, dragging to the left and selecting the respective function:

- Trip data.
- Vehicle status.
- Active Info Display → page 15.

WARNING

Accidents and injuries can occur if the driver is distracted. Operation of the radio system may distract from the surrounding traffic happenings.

- Always drive carefully and responsibly.

 After starting the engine with the vehicle's 12 V battery completely flat, or with a replacement battery in the vehicle, the system's configuration (time, date, convenience and programming configurations) may have been deleted or become corrupted. Check and adjust the settings after the 12 V vehicle battery has been sufficiently recharged.

Safety

Overall guidelines

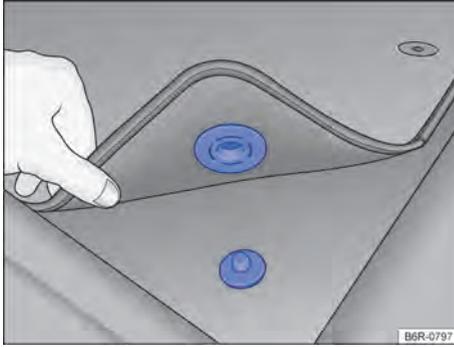


Fig. 18 Driver side mat attached to the floor pin.

Preparations for travel and driving safety

Observe the following information both before and during every journey to ensure your own safety, and the safety of all passengers and other road users → :

- ✓ Check that all lights and turn signals are working properly.
- ✓ Check the tyre pressure (→ page 248) and fuel level (→ page 14).
- ✓ Ensure that you have a good, clear view through all of the windows.
- ✓ The supply of air to the engine may not be suppressed and the engine should not be covered with covers or insulating materials →  in *Safety guidelines for work in the engine compartment* on page 226.
- ✓ Secure any objects and luggage in the stowage compartments, the luggage compartment or on the roof → page 195.
- ✓ Ensure that you are able to operate the pedals freely at all times.
- ✓ Secure any children travelling in the vehicle in a restraint system suitable for the child's weight and size → page 45.
- ✓ Adjust the front seats, headrests and mirrors properly in accordance with the size of the occupants → page 28.
- ✓ Wear proper shoes that provide good grip for your feet when using the pedals.

- ✓ The floor mat in the footwell on the driver side must be securely fastened to ensure the pedal area is unobstructed. Depending on the version of the vehicle, the driver mat may be attached to the floor mat pin → [Fig. 18](#).
- ✓ Assume a correct sitting position before and while driving. This also applies to all passengers → page 28.
- ✓ Fasten your seat belt correctly before setting off and keep it properly fastened throughout the journey. This also applies to all passengers → page 30.
- ✓ Each vehicle occupant must sit in a seat of their own and must have their own seat belt.
- ✓ Never drive if your driving ability is impaired, e.g. by medication, alcohol, drugs, among other substances capable of influencing your perception and reaction.
- ✓ Do not allow yourself to be distracted from the traffic (e.g. by passengers, telephone calls, browsing through display menus.)
- ✓ Always adjust speed and driving pattern according to visibility, climate, road, and traffic conditions, under respective speed limits.
- ✓ Observe traffic regulations and speed limits.
- ✓ When travelling long distances, stop and take a break regularly – at least every two hours.
- ✓ Carry animals in the vehicle using restraint systems based on their weight and size.

Driving abroad

Some countries adopt special safety regulations and relevant prescriptions for exhaust gases which may differ from the structural condition of the vehicle. Volkswagen recommends that you learn about any legal requirement and the following issues concerning your destination before travelling abroad:

- ✓ Does the vehicle need any technical modifications for driving abroad, e.g. masking or switching the headlights over?
- ✓ Are the necessary tools, diagnostic equipment and spare parts available for service and repair work?
- ✓ Is there a Volkswagen Dealership in the destination country?
- ✓ Is there unleaded petrol with the correct octane number and free of metallic additives (such as manganese) in the destination country? 

Driving abroad (Continued)

- ✓ Are the correct engine oil (→ page 230) and other service fluids that comply with Volkswagen specifications available in the destination country?
- ✓ Are special tyres required for travelling in the destination country?

Checks when fuelling

Never carry out any work on the engine or in the engine compartment if you are not familiar with the necessary procedures and the general safety requirements, as well as without available resources, fluids and tools → page 225! The work should be carried out by a Volkswagen Dealership or qualified workshop. Please ensure that the following points are checked regularly, preferably every time you fill the tank:

- ✓ Windscreen washer fluid level → page 230
- ✓ Engine oil level → page 230
- ✓ Engine coolant level → page 234
- ✓ Brake fluid level → page 237
- ✓ Tyre pressure → page 248
- ✓ Vehicle lighting necessary for traffic safety:
 - Turn signals
 - Side light, dipped beam and main beam headlights
 - Tail light lamps
 - Brake light
 - Number plate light

Information about changing bulbs → page 213.

DANGER

Follow the important safety instructions related to the front passenger's front airbag → page 47, *Installation and child seat usage in the vehicle*.

WARNING

Driving under the influence of alcohol, drugs, medication and/or narcotics can cause serious accidents and fatal injuries.

- Alcohol, drugs, medication and/or narcotics can severely impair perception, reaction times and driving safety. This could cause you to lose control of the vehicle.

WARNING

Always observe current traffic regulations and speed limits, and think ahead when driving. Correct interpretation of a driving situation can make the difference between reaching your destination safely and having an accident with severe injuries.

NOTICE

Volkswagen may not be held liable for damages caused to the vehicle due to low-quality fuel, insufficient/incorrect maintenance, and use of non-genuine parts.

 Regular servicing of your vehicle not only maintains its value, but also ensures that your vehicle remains roadworthy and in perfect working order. Servicing work should therefore always be carried out in accordance with the Volkswagen maintenance guidelines. Under severe operating conditions it may be necessary to carry out some maintenance jobs prior the next scheduled service. Additional information on adverse conditions is available on → page 260, which prior reading is essential. Contact a Volkswagen Dealership for more information. 

Adjusting the seat position

Introduction

Number of seats

The vehicle has a total of 5 seats: 2 front seats and 3 rear seats. Each seat is equipped with safety belts.

WARNING

Assuming an incorrect sitting position in the vehicle can increase the risk of severe or fatal injuries during a sudden driving or braking manoeuvre, in the event of a collision or accident, or if the airbags are triggered.

- All vehicle occupants must assume a correct sitting position before setting off and maintain this position throughout the trip. This also applies to the use of seat belts. 

- The number of vehicle occupants must never exceed the number of seats with seat belts in the vehicle.
- Always secure children in the vehicle with an authorised restraint system suitable for their height and weight → page 45, *Transporting children in the vehicle*, → page 38, *Airbag system*.
- Always keep your feet in the footwell while the vehicle is in motion. Never place your feet on the seat or on the dash panel and never hold your feet out the window. The airbag and seat belt can otherwise not provide optimal protection and can actually increase the risk of injury during an accident.

- Never put your feet on the dash panel.
- Never place your feet on the seat cushion or seat backrest.
- Never travel in a footwell.
- Never travel on a seat without wearing the seat belt.
- Never travel in the internal luggage compartment.

⚠ WARNING

Any incorrect sitting position in the vehicle increases the risk of severe or fatal injuries in the event of an accident or sudden driving or braking manoeuvre.

- All vehicle occupants must maintain a correct sitting position and wear their seat belt properly while the vehicle is in motion.
- Sitting in an incorrect position, not fastening the seat belt, or leaving too short a distance to the airbag exposes the occupants to the risk of sustaining critical or fatal injuries, especially if the airbags are triggered and strike an occupant who has assumed an incorrect sitting position.

Dangers of an incorrect sitting position

📖 Please refer to ⚠ at the start of the chapter on page 28.

If the seat belts are not worn or are worn incorrectly, the risk of severe or fatal injuries increases. Seat belts can only provide optimal protection if the seat belt routing is correct. An incorrect sitting position considerably impairs the level of protection provided by the seat belts. This could lead to severe or even fatal injuries. The risk of severe or fatal injuries is especially augmented when a triggered airbag hits an occupant who has assumed an incorrect sitting position. The driver is responsible for all vehicle passengers, especially if they are children.

The following list contains examples of sitting positions that could be dangerous for all occupants.

Whenever the vehicle is in motion:

- Never stand in the vehicle.
- Never stand on the seats.
- Never kneel over the seats.
- Never tilt the backrest too far to the rear.
- Never lean against the dash panel.
- Never lie on the rear seat.
- Never sit on the front edge of a seat.
- Never sit sideways.
- Never lean out of a window.
- Never put your feet out of a window.

Correct sitting position

📖 Please refer to ⚠ at the start of the chapter on page 28.

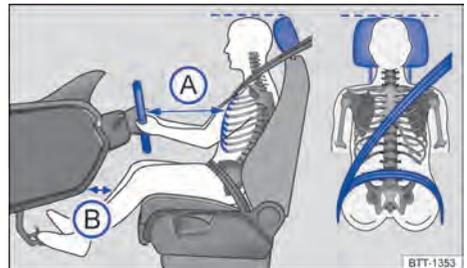


Fig. 19 Correct distance between the driver and the steering wheel, correct seatbelt position and correct headrest adjustment.

The following points describe the correct sitting positions for the driver and passengers.

Persons who due to their physical build are unable to sit correctly in the vehicle should contact a Volkswagen Dealership to learn about possible special installations. The seat belts and airbags

can only provide a maximum level of protection if a correct sitting position is assumed. Volkswagen recommends using a Volkswagen Dealership for this purpose.

Volkswagen recommends the following seating position for your own safety and to minimize injuries in the event of sudden braking manoeuvres or accidents:

Points for the driver:

- Move the backrest into an upright position so that your back rests fully against it.
- Adjust the seat so that the distance between the steering wheel and the driver's chest is of at least 25 cm → Fig. 19 (A) and so the driver can firmly hold the steering wheel by its outer rim with both hands and with slightly flexed arms.
- The steering wheel must always point towards the breastbone and not towards the face.
- Adjust the driver's seat lengthwise so that the pedals may be reached with slightly flexed legs and so that the distance between the knees and the dashboard is at least 10 cm → Fig. 19 (B).
- Adjust the height so that you can reach the highest point of the steering wheel.
- Always leave both feet in the footwell to maintain control of the vehicle at all times.
- Fasten seat belts properly → page 30.

Points for the front passenger:

- Move the backrest into an upright position so that your back rests fully against it.
- Push the front passenger seat as far back as possible so that the airbag can provide maximum protection if it is triggered.
- Always keep your feet in the footwell while the vehicle is in motion.
- Fasten seat belts properly → page 30.

Points for rear vehicle passengers:

- Adjust the head rest so its top edge is at the same height as the top of the head → Fig. 19 – but not below eye level. Position the back of your head as close to the head restraint as possible.
- In case of short stature individuals, push the head restraint all the way down, even if the head is then located underneath the top edge of the head rest.

- For taller people, push the head rest up as far as possible.
- Always keep your feet in the footwell while the vehicle is in motion.
- Adjust and fasten seat belts properly → page 30.



Seat belts



Introduction

Check the condition of all seat belts regularly. In case of damages to belts, connections, automatic belt retractor, or seat belt latches, the respective seat belt must be immediately replaced by a Volkswagen Dealership → ⚠. One must use correct spare parts that are compatible with the vehicle, equipment level and model year. Volkswagen recommends using a Volkswagen Dealership for this purpose.



WARNING

Incorrectly fastened or unfastened seat belts increase the risk of severe or fatal injuries. Seat belts will only offer the optimum level of protection when they are fastened and used properly.

- Seat belts are the most effective means of reducing the risk of severe and fatal injuries in case of accidents. For the protection of the driver and of all vehicle occupants, seat belts must always be fastened properly when the vehicle is in motion.
- Before every trip, each vehicle occupant must assume a correct sitting position, correctly fasten the seat belt belonging to their seat and keep it fastened properly throughout the trip. This applies to all passengers in any traffic condition.
- While the vehicle is in motion, secure all children travelling in the vehicle in a restraint system suitable for their age, as well as properly secured seat belts → page 45, *Transporting children in the vehicle*.
- Only start driving when all passengers have correctly fastened their seat belts.



- Only ever insert the latch plate into the buckle of the associated seat, and always ensure that it engages properly. Using a buckle that does not belong to the seat that you are occupying reduces the level of protection and can lead to severe injuries.
- Never let any foreign bodies or liquids enter the seat belt buckle slot. This could prevent belt buckles from working properly.
- Never unfasten the seat belt while the vehicle is in motion.
- Never allow more than one person to share the same seat belt.
- Never allow children or babies to be transported on someone's lap, or while being held.
- Never drive wearing loose, bulky clothing (such as an overcoat over a jacket). This could prevent the seat belts from fitting and functioning properly.

WARNING

Damaged seat belts are extremely dangerous and can cause severe or fatal injuries.

- Never damage the belt by trapping it in the door or in the seat mechanism.
- If the belt bands fabric or any other part of the seat belt becomes damaged, the seat belt may tear during an accident or sudden braking manoeuvre.
- Damaged seat belts must be replaced immediately with new seat belts at a Volkswagen Dealership. Seat belts used during an accident and subjected to stress or belt tensioner activation must be replaced by a Volkswagen Dealership. Replacement may be necessary even if there is no apparent damage. The belt anchorage should also be checked.
- Never attempt to repair, modify or remove the seat belts yourself. All repairs to seat belts, belt retractors and buckles must be carried out by a Volkswagen Dealership.

Warning lamp

 Please refer to  at the start of the chapter on page 30.



Fig. 20 Instrument cluster display warning lamp.



Fig. 21 Seat belt status indicator for rear seats in the instrument cluster display.

An acoustic warning sounds for a few seconds if the seat belts are not fastened prior to reaching a speed of approximately 25 km/h or whenever the seat belts are unfastened while driving. In addition, the warning lamp flashes  → Fig. 20.

The warning light  only turns off, with the ignition switched on, after the driver and front passenger have fastened their respective seat belts.

Rear seat belt status indicator

After switching the ignition on, the seat belt status indicator → Fig. 21 shows in the instrument cluster display whether rear seat passengers have fastened their seat belts.

 The symbol indicates that the passenger in this seat has fastened the seat belt.

 The symbol indicates that the passenger in this seat has not fastened the seat belt.

The seat belt status indication is shown for approximately 60 seconds whenever a seat belt is fastened or removed in the rear seats. The indication can be hidden by pressing  on the instrument cluster display.

If a rear seat belt is removed while driving, the seat belt status indicator flashes for up to 60 seconds. A sound warning is also activated when driving at speeds higher than 25 km/h.

⚠ WARNING

Incorrectly fastened or unfastened seat belts increase the risk of severe or fatal injuries. Seat belts will only offer the optimum level of protection when they are used properly.

Frontal collisions and the laws of physics

📖 Please refer to ⚠ at the start of the chapter on page 30.



Fig. 22 Unbelted occupants in a vehicle heading for a brick wall.

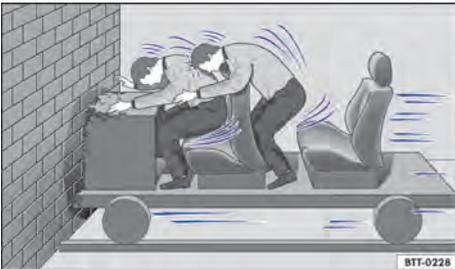


Fig. 23 Unbelted occupants in a vehicle striking a brick wall

The physical principles involved in a frontal collision are relatively simple. As soon as the vehicle is in motion → Fig. 22, both the moving vehicle and its passengers gain movement energy. Such energy is known as “kinetic energy”.

The higher the vehicle speed and the heavier the weight of the vehicle, the greater the amount of energy that will have to be released in the event of an accident.

However, the most significant factor is the vehicle speed. For example, when the speed doubles from 25 km/h to approximately 50 km/h (15 mph to approximately 30 mph), the kinetic energy increases fourfold!

◀ The amount of “kinetic energy” depends on the vehicle speed and weight of the vehicle and passengers. The higher the speed and the heavier the weight, the greater the amount of energy that will be released in the event of an accident.

Passengers not wearing seat belts are, therefore, not “connected” to the vehicle. In the event of a frontal collision they will continue to move forward at the same speed at which the vehicle was travelling before impact, until something stops them. Because the passengers in our example are not restrained by seat belts, the entire amount of kinetic energy will only be released at the point of impact against the wall → Fig. 23.

At a speed of approximately 50 km/h (30 mph), the forces acting on the body during an accident can easily exceed one tonne (1,000 kg). These forces are even greater at higher speeds.

This example applies not only to frontal collisions, but to all kinds of accidents and collisions. ▶

What happens to passengers who have not fastened their seat belts

📖 Please refer to ⚠ at the start of the chapter on page 30.



Fig. 24 An unbelted driver is thrown forward. ▶



Fig. 25 The unbelted rear passenger is thrown forward violently, hitting the belted driver.

Many people believe that they can brace their weight with their hands in a minor collision. This is not true.

Even at low speeds, the forces acting on the body in a collision are so great that occupants cannot brace themselves with their arms and hands. In a frontal collision, unbelted passengers are thrown forward and will make unchecked contact with parts of the vehicle interior, e.g. the steering wheel, dash panel, or windscreen → Fig. 24.

The airbag system is not a substitute for the seat belts. When triggered, airbags only provide additional protection. Airbags are not triggered in all kinds of accidents. Even if the vehicle is equipped with an airbag system, all vehicle occupants, including the driver, must fasten their seat belt and wear it correctly while the vehicle is in motion. This reduces the risk of severe or fatal injuries in the event of an accident - regardless of whether an airbag is available.

An airbag can only be triggered once. To achieve best possible protection, seat belts must always be worn properly. This also ensures that protection is provided in accidents in which the airbag is not triggered. Any vehicle occupant not wearing a seat belt can be thrown out of the vehicle and sustain even more severe or even fatal injuries as a result.

It is also essential for rear passengers to wear seat belts properly, as they could otherwise be thrown forward violently in an accident. Rear passengers who are not wearing seat belts endanger not only themselves and the driver, but also other people in the vehicle → Fig. 25.

Seat belts protect

📖 Please refer to ⚠ at the start of the chapter on page 30.



Fig. 26 Driver restrained by a properly positioned seat belt during a sudden braking manoeuvre.

Correctly fastened seat belts can make a major difference. When fastened properly, seat belts hold the vehicle occupants in the correct sitting positions and considerably reduce the kinetic energy in the event of an accident. Seat belts also help to prevent uncontrolled movements that could lead to severe injuries. Additionally, wearing seat belts properly reduces the risk of being thrown from the vehicle → Fig. 26.

Passengers wearing seat belts correctly benefit greatly from the ability of the belts to reduce the kinetic energy generated. The front crumple zones and other passive safety features (such as the airbag system) are also designed to mitigate kinetic energy. The amount of energy generated will thus decrease, thereby reducing the risk of injury.

The illustrated examples describe frontal collisions. Properly worn seat belts also substantially reduce the risk of injury in all other types of accidents. This is why seat belts must be fastened before every trip - even if you only planning on going "around the block". Ensure that all passengers also wear their seat belts properly.

Accident statistics have shown properly worn seat belts to be an effective means of substantially reducing the risk of injury and improving the chances of survival in severe accidents. Furthermore, properly worn seat belts ensure proper

airbag operation in case of accidents. This is why wearing a seat belt is a legal requirement in most countries.

Although the vehicle is equipped with airbags, seat belts must be used at all times. For example, the front airbags will only be triggered in certain types of frontal collision. Front airbags will not be triggered during minor frontal collisions, minor side collisions, rear collisions, rolls or accidents in which the airbag trigger threshold in the control unit is not exceeded.

Therefore, always wear your seat belt and ensure that your passengers have fastened their seat belts properly before driving.

Using seat belts

📖 Please refer to ⚠️ at the start of the chapter on page 30.

Checklist

Using seat belts → ⚠️:

- ✓ Check the condition of all seat belts regularly.
- ✓ Keep the seat belts clean.
- ✓ Never let any foreign bodies and liquids get on to the seat belt, the latch plate or into the slot for the seat belt buckle.
- ✓ Do not trap or damage the seat belt and latch plate (e.g. when closing the door).
- ✓ Never remove, modify or repair the seat belt or any part of the belt fixture system.
- ✓ Always fasten the seat belt correctly before driving and wear it properly while the vehicle is in motion.

Twisted seat belt

If it is difficult to remove the seat belt from the belt guide, the seat belt may have become twisted if it was returned too quickly into the side trim: In this case:

- Take hold of the latch plate then slowly and carefully pull out the seat belt.
- Untwist the seat belt and guide it back slowly by hand.

Fasten the seat belt even if you are unable to undo the twist. However, the twist should not be in an area of the seat belt that comes into direct contact with the body! The twist should be corrected immediately by a Volkswagen Dealership.

⚠️ WARNING

Using seat belts incorrectly increases the risk of severe or fatal injuries.

- Regularly check to see if the seat belt and its related parts are in perfect working conditions.
- Keep the seat belts clean.
- Do not allow the belt bands to become jammed, damaged or to rub on any sharp edges.
- Always keep the latch plate and slot in the buckle free from foreign bodies and liquids.

Fastening and unfastening seat belts

📖 Please refer to ⚠️ at the start of the chapter on page 30.

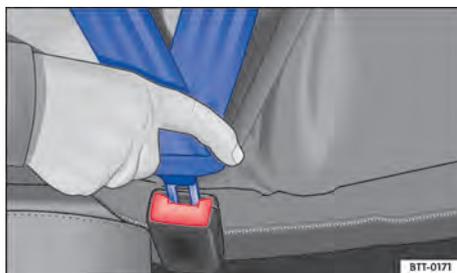


Fig. 27 Inserting the seat belt latch plate into the buckle.



Fig. 28 Removing the seat belt latch plate into the buckle.

If worn properly, seat belts hold the vehicle occupants in the correct sitting position during an accident or braking manoeuvre, giving occupants maximum protection → .

Fastening the seat belts

Fasten seat belts before driving.

- Always properly adjust the front seats and head rests → page 28.
- Lock the rear seat backrest in its proper position → .
- Gently pull the seat belt through the latch plate, across the chest and the pelvic area. **Do not twist the seat belt** → .
- Insert the latch plate securely into the buckle of the respective seat → Fig. 27.
- Pull test the seat belt to ensure that the latch plate is securely locked in the buckle.

Unfastening the seat belts

Unfasten seat belts only when the vehicle is stationary → .

- Press the red button in the buckle → Fig. 28. The latch plate is released and springs out.
- Guide the belt back so that it rolls up easily, without twisting the seat belt and without damaging the trim.

WARNING

Incorrect seat belt routing can cause severe or fatal injuries in the event of an accident.

- The seat belts only offer best protection when the backrests are in the proper position and the seat belts have been fastened properly according to the occupant's height.
- Unfastening seat belts while the vehicle is in motion can lead to severe or fatal injuries in the event of an accident or sudden braking manoeuvre.

Seat belt routing

 Please refer to  at the start of the chapter on page 30.

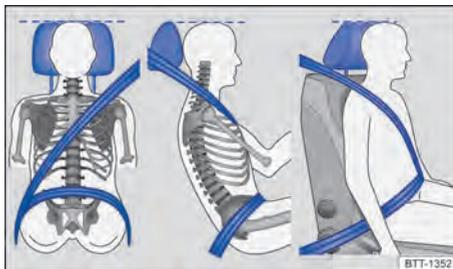


Fig. 29 Correct seat belt routing and head rest adjustment.



Fig. 30 Correct seat belt routing during pregnancy.

Seat belts only provide an optimum level of protection during an accident and reduce the risk of severe or fatal injuries when they are routed correctly. Correct seat belt bands routing also holds the vehicle occupants in position so that an inflating airbag can offer the maximum level of protection. Therefore always fasten your seat belt and ensure that the seat belt routing is correct.

An incorrect sitting position can cause severe or fatal injuries → page 28, *Adjusting the seat position*.

Correct seat belt routing

- The shoulder part of the seat belt must always lie on the centre of the shoulder, never across the neck, over or under the arm, or behind the back.
- The lower seat belt strap must always lie across the pelvis, never across the stomach.
- The seat belt must always lie flat and firm against the body. Slightly stretch the seat belt if necessary → Fig. 29.

For **pregnant women**, the seat belt must be positioned over the chest and as low as possible over the pelvis, so that no pressure is exerted on the lower body – this applies to all pregnancy stages → Fig. 30.

Correct seat belt routing according to height

The seat belt routing can be adjusted as follows:

- Belt height adjuster for the front seats → page 36.
- Front seat with height adjustment → page 70.

! WARNING

Incorrect seat belt routing can cause severe injuries in the event of an accident or a sudden braking / driving manoeuvre.

- The seat belts only offer best protection when the backrests are in the proper position and the seat belts have been fastened properly.
- The shoulder part of the seat belt must lie on the centre of the shoulder and never under the arm or across the neck.
- The seat belt must lie flat and firmly over the chest.
- The lower seat belt strap must always lie across the pelvis, never across the stomach. The seat belt must lie flat and firmly over the pelvis. Slightly loosen the seat belt if necessary.
- For pregnant women, the lap part of the seat belt must be as low as possible over the pelvis around the “bulge” of the belly.
- Do not twist the belt bands while securing the seat belt.
- Never hold the seat belt away from the body by hand.
- The belt bands should not lie over hard or fragile objects, such as glasses, pens or keys.

- Never use seat belt clips, retaining rings or similar items to alter the seat belt routing.



If a person's physical build prevents them from routing the seat belt properly, contact a Volkswagen Dealership to find out about any special modifications so that the seat belts and airbags can provide the optimum level of protection.

Belt height adjuster

Please refer to at the start of the chapter on page 30.



Fig. 31 Next to the front seats: seat belt height adjuster.

The seat belt height adjusters for the front seats can be used to adjust the seat belt position on the shoulder area according to the body size, so it can be fastened properly:

- Press and hold the shoulder belt guide as indicated by the arrows → Fig. 31.
- Push the shoulder belt guide up or down so that the seat belt lies over the middle of the shoulder → page 35.
- Let go of the shoulder belt guide.
- Pull sharply on the seat belt to check whether the shoulder belt guide is engaged securely.

! WARNING

Never adjust the seat belt height when the vehicle is in motion.

Automatic belt retractor, belt tensioner and belt roll-back function

 Please refer to  at the start of the chapter on page 30.

Seat belts are part of the vehicle's safety system → page 40 and are made up of the following important functions:

Automatic belt retractor

The safety belts are fitted with an automatic retriever roller, this device keeps the safety belt adjusted to the passenger's body. Full freedom of movement in the passenger's upper body area is made possible when the seat belt is pulled slowly or when the vehicle is travelling at normal speeds. However, the automatic belt retractor locks the seat belt if the belt is pulled out quickly, during sudden braking, when driving uphill or downhill or around bends, and during acceleration.

Seat belt tensioners

Front seat belts are equipped with belt tensioners and roll-back function. Rear seat belts are not equipped with these features.

Belt tensioners are activated by sensors during severe frontal and rear collisions, tightening the seat belts against the direction in which they are pulled. Safety belt clearances are eliminated when the belt tensioner is activated, reducing the forward movement of passengers towards the impact direction. Belt tensioners works together with the airbag system. Belt tensioners are not activated in minor front collisions, rolls or accidents in which the threshold in the control unit is not exceeded.

A fine dust may be generated upon activation. This is perfectly normal and does not represent fire risk.

Seat belt roll-back function

The front seat belts are equipped with roll-back function.

The seat belt roll-back function minimizes seat belt force acting over the body in case of accidents.

 All safety requirements must be observed when the vehicle or components of the system are scrapped. Volkswagen Dealerships are familiar with such requirements. 

Service and disposal of belt tensioners

 Please refer to  at the start of the chapter on page 30.

Seat belts may become damaged during any work on the belt tensioners or while removing or refitting any vehicle parts in conjunction with any other repair work. Such damages will not always be noticeable. The consequence may be that the belt tensioners could function incorrectly, or not function at all, in the event of an accident.

Regulations must be observed to ensure that the effectiveness of the belt tensioner is not reduced and that removed parts do not cause any injuries or environmental pollution. Volkswagen Dealerships are familiar with such requirements.

WARNING

The risk of severe or fatal injuries may be increased if the seat belts, automatic belt retractors and belt tensioners are not used correctly, or if they are repaired by a non-professional. In this case, the belt tensioners may not be triggered when they should, or they may be triggered unexpectedly.

- Only Volkswagen → page 270, *Accessories, modifications, repairs and part replacement* may carry out repairs, adjustments or removal and refitting of parts in the belt tensioner system or seat belts.
- Belt tensioners and automatic belt retractors cannot be repaired. They must be replaced.
- Belt tensioners can only be activated once. Once the belt tensioners are activated, they must be replaced.

 Airbag modules and belt tensioners may contain toxic substances. This product cannot be disposed / discarded along with common trash. For your own safety and comfort, Volkswagen recommends replacing belt tensioners and airbag modules only at Volkswagen Dealerships. 

Airbag system

Introduction

The vehicle is equipped with one front airbag for the driver and one for the passenger. Front airbags can provide the driver and front passenger with additional chest and head protection if the seat, seat belts, head rests and, in the case of the driver, steering wheel are adjusted and used correctly. Airbags are meant to provide additional protection. Airbags are not a substitute for seat belts. Seat belts must always be worn, even when the vehicle is equipped with front airbags.

⚠ WARNING

Never rely solely on the airbag system for your protection.

- Even if an airbag is triggered, it only offers additional protection.
- The airbag system only enhances protection if the seat belt is properly used, in order to mitigate injuries → page 30, *Seat belts*.
- Before every trip, each vehicle occupant must assume a correct sitting position, correctly fasten the seat belt belonging to their seat and keep it fastened properly throughout the trip.

⚠ WARNING

The risk of injury increases if there are any items located between the occupant and the deployment area of the airbag when it is triggered. This will impinge on the deployment zone of the airbag or the items will be flung against the body.

- Never hold any objects in your hand or on your lap while the vehicle is in motion.
- Never transport any objects on the front passenger seat. Objects could enter the deployment zone of the airbag during sudden braking or driving manoeuvres and then be flung dangerously through the vehicle interior if the airbag is activated.
- People, animals or objects must never be in-between the vehicle's front seat occupants, the rear side seat occupants and the airbag expansion areas. Ensure this is also followed by children and passengers.

⚠ WARNING

The airbag system only supports a single airbag triggering event. If the airbags are triggered, the airbag system must be replaced.

- Airbags that have been triggered, and any affected system parts, must immediately be replaced with new parts that are approved by Volkswagen for the vehicle.
- Airbag system repairs and part replacements must only be carried out by Volkswagen Dealerships. Volkswagen Dealerships have the necessary tools, diagnostic equipment, repair information and qualified personnel for this purpose.
- Never use recycled airbag components or components that have been taken from end-of-life vehicles in your vehicle.
- Never alter any components of the airbag system.

⚠ WARNING

A fine dust (non-toxic) may be generated upon activation. This is perfectly normal and does not represent fire risk.

- The fine dust can cause irritation to the skin and eye membranes and cause breathing difficulties, particularly for people suffering from asthma or people who have or had other respiratory problems. To help reduce breathing difficulties, get out of the vehicle or open the windows or doors for more fresh air.
- If you come into contact with the dust, wash your hands and face with a mild soap and water before eating.
- Do not let the dust get into your eyes or into open wounds.
- If dust has entered your eyes, rinse them with water.

⚠ WARNING

Cleaning products cause the airbag module surfaces to become porous and brittle. In case of activation, such parts could break and cause severe injuries.

- Never apply any chemical or cleaning products to the airbag module surfaces. Use only damp cloths to clean these areas.

Front passenger front airbag system type

📖 Please refer to ⚠️ at the start of the chapter on page 38.

Front passenger airbag system with front airbag deactivation

The front passenger airbag is manually deactivated through a switch activated by the vehicle key → page 42.

Signs of the airbag system with front passenger airbag deactivation:

- Front passenger front airbag in the dash panel.
- Indicator lamp  on the Instrument cluster display.
- Indicator lamp PASSENGER AIR BAG OFF  in the upper part of the centre console.
- Indicator lamp PASSENGER AIR BAG ON  in the upper part of the centre console.
- Key-activated switch next to the dash panel on the front passenger side (visible only with open door).

Indicator lamp

📖 Please refer to ⚠️ at the start of the chapter on page 38.

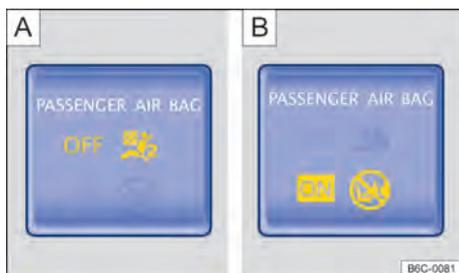


Fig. 32 In the upper part of the centre console: front passenger front airbag indicator lamp off [A](#) or on [B](#).

 The yellow indicator lamp on the instrument cluster display lights up briefly after switching on the ignition to test for proper operation, and goes off after a few seconds.

OFF  The yellow indicator lamp on the centre console is permanently on → [Fig. 32 A](#).

ON  Front passenger front airbag enabled. The yellow indicator lamp on the centre console turns off automatically around 60 seconds after turning the ignition on or after enabling the front passenger front airbag with the key-activated switch → [Fig. 32 B](#).

If, with **disabled** front passenger front airbag, the PASSENGER AIR BAG OFF  indicator lamp in the upper part of the centre console is **not permanently lit** or if it lights up together with the  indicator lamp on the instrument cluster, the airbag system may be malfunctioning → [⚠️](#).

⚠️ DANGER

When the airbag system indicator lamp is lit, there are damages in the airbag system and it may not trigger correctly, may not trigger at all or may trigger unexpectedly. This can cause severe or fatal injuries.

- The airbag system must be checked by a Volkswagen Dealership as soon as possible.
- Never fit a child seat on the front passenger seat while the airbag system is activated! The passenger front airbag may be triggered in an accident, despite damages.

Troubleshooting

📖 Please refer to ⚠️ at the start of the chapter on page 38.

Airbags system or belt tensioner damaged

The yellow indicator lamp is permanently on. A message will also be shown on the instrument cluster display.

A malfunction was identified in at least one airbag or belt tensioner.

- Contact a Volkswagen Dealership.
- Belt tensioners and the airbag system must be checked.

OFF Front passenger front airbag disabled

The yellow indicator lamp is permanently on for the deactivated front passenger front airbag.

The front passenger front airbag is deactivated.

- Check whether the front passenger front airbag needs to stay deactivated, for instance, while using a child seat on the front passenger seat.

ON Front passenger front airbag enabled

The yellow indicator lamp for the front passenger front airbag turns on for approximately 60 seconds after turning the ignition on or after activating the front passenger front airbag with the key-activated switch.

The front passenger front airbag is on.

- Check whether the front passenger front airbag should remain on.



Description and function of the airbags

 Please refer to  at the start of the chapter on page 38.

The airbag protects the vehicle's occupants in an accident, cushioning the occupant's movements in case of frontal collisions.

When an airbag is triggered, it is inflated by a gas generator. This causes the airbag covers to break, and the airbags inflate forcefully to cover their deployment zones within milliseconds. After holding vehicle occupants in place, who must always wear their respective seat belts, inflated airbags release a gas through openings located away from the vehicle occupants. This can reduce the risk of severe and fatal injuries. A triggered airbag will not always prevent other injuries such as swelling, bruising and grazing. Heat by friction can also be generated during an airbag triggering event.

Airbags provide no protection for the arms or lower body parts.

The most important factors regarding airbag triggering are the type of accident, the vehicle impact area, the angle, the intensity of the impact, the vehicle structure, and the obstacle to which the vehicle collided. Therefore, airbags are not triggered in all collisions.

The airbag system's triggering depends on the intensity of the impact registered by an electronic control unit. If the accident's characteristics do not fall under the parameters configured in the control unit, the airbags are not triggered. Vehicle damages and cost repairs are used as indicators that they airbag system should have been triggered. Important factors in the triggering of the airbag include the nature (hard or soft) of the object that the vehicle hits, the angle and intensity of impact, and the vehicle impact area.

Airbags are merely used as additional safety features for the seat belts in some accidents in which the impact intensity is sufficient to trigger the airbags. Airbags can only be triggered once and only in certain situations. The seat belts are always there to provide protection in situations in which the airbags are not triggered or have already been triggered. For example, if the vehicle collides with a further vehicle following the initial collision, or is hit by another vehicle.

The airbag system is part of the vehicle's overall passive safety concept. The airbag system can only work effectively when the occupants are wearing their seat belts correctly and have assumed a proper sitting position  → page 28.

Components of the vehicle safety concept

The following vehicle safety equipment makes up the vehicle's safety concept to reduce the risk of severe and fatal injuries. Depending on the vehicle version, some of the equipment may not be fitted in your vehicle or may not be available at all in some countries.

- Optimised seat belts for all seats.
- Belt tensioners for the driver and front passenger.
- Belt tension limiter for the driver and front passenger.
- Belt height adjuster for the front seats.
- Seat belt warning lamp .
- Front airbags for driver and front passenger.
- Driver and front passenger's airbags.
- Airbag indicator lamp .



- PASSENGER AIR BAG **OFF**  indicator lamp on the upper part of the centre console.
- PASSENGER AIR BAG **ON**  indicator lamp on the upper part of the centre console.
- Sensors and control units.
- Height-adjustable head restraints optimised for rear impact.
- Adjustable steering column.
- If necessary, child seat anchoring points on the rear side seats.
- If necessary, anchoring point for the upper child seat fastening belt.

Situations in which the front and side airbags are not triggered:

- If the ignition is switched off during a collision.
- If the impact intensity measured in control units is too small during frontal collisions.
- During minor side collisions.
- During rear collisions.
- If the vehicle rolls over.
- If the impact intensity measured by the control unit is insufficient to trigger the airbags.

In case of airbag triggering - Crash detection function

Whenever airbags are deployed during an accident, the crash detection functions is activated and the following actions may occur:

- Vehicle doors unlocking (valid for vehicles equipped with central locking system) → page 59.
- Fuel supply cut off → page 205.
- Activation of inner vehicle lights → page 79.
- Activation of warning lamps → page 53.

Warning lamps may be switched off via the dash panel switch.

Front airbags

 Please refer to  at the start of the chapter on page 38.

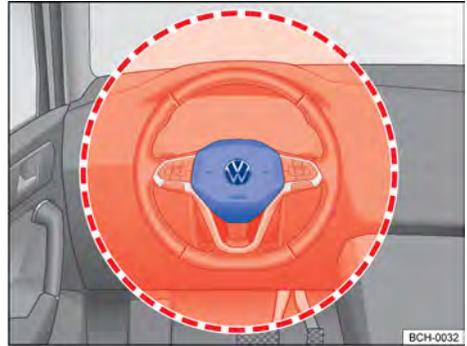


Fig. 33 Location and deployment zone of the driver front airbag.



Fig. 34 Installation location and expansion zone of the passenger front airbag.

In conjunction with the seat belts, the front airbag system gives the front occupants additional protection for the head and chest in the event of a severe frontal collision. Farthest distance from the front airbag is recommended; at least 25 cm → page 28. This allows the front airbags to inflate fully when triggered, thus providing maximum protection.

The driver's front airbag is placed in the steering wheel → Fig. 33 and the front airbag for the front passenger is placed in the dash panel → Fig. 34. Airbag locations are identified by the text "AIR-BAG".

The areas highlighted in red → Fig. 33 and → Fig. 34 are covered by the front airbags when triggered (deployment zone). For this reason, you must never leave or attach any items in these areas → ⚠.

The airbag covers fold out from the steering wheel → Fig. 33 or from the dashboard → Fig. 34 when the driver and passenger front airbags are triggered. The airbag covers remain connected to the steering wheel or the dashboard.

⚠ DANGER

Once triggered, the airbag inflates at high speed.

- Always leave the deployment zones of the front airbags clear.
- Never attach any items, such as drink or telephone holders, GPS, etc., to the covers of the airbags or anywhere in the airbag deployment zone.
- Front seat occupants must never carry any people, pets or objects in the deployment zone between themselves and the airbags.
- Do not attach objects, such as GPS devices, to the windscreen above the front passenger's front airbag.
- Do not attach, line, modify, or place any materials over the centre steering wheel surface (horn activation) and the front passenger airbag module surface, on the dash panel.

⚠ WARNING

The front airbags are triggered in front of the steering wheel → Fig. 33 and dash panel → Fig. 34.

- When driving, always hold the steering wheel with both hands on the outside of the ring: 9 o'clock and 3 o'clock positions.
- Adjust the driver seat in such a way that there is at least 25 cm between your breastbone and the hub of the steering wheel. If your physical build makes it impossible to fulfil this requirement, you must contact a Volkswagen Dealership in order to implement any necessary modifications.
- Adjust the passenger seat so that the distance between the passenger and the dashboard is as wide as possible.

🌿 Airbag system parts must never be reused in case of vehicle or component scrapping. All applicable environment disposal standards must be followed, in addition to other safety standards in effect. Volkswagen Dealerships are familiar with such requirements.

Switching the passenger front airbag on and off manually with the key activated switch

📖 Please refer to ⚠ at the start of the chapter on page 38.



Fig. 35 On the dash panel on the front passenger side: key activated switch to enable or disable the front passenger front airbag.

When securing a rear-facing child seat in the front passenger seat, the front passenger front airbag must be switched off!

Enabling the front passenger front airbag

- Switch off the ignition.
- Open the front passenger door.
- Unfold the vehicle key bit → page 56.
- Using the key bit, turn the key-activated switch → Fig. 35 → ⌚ to ⌚ ON.
- Remove the vehicle key from the key activated switch and fold the key bit inward.
- The PASSENGER AIR BAG ON ⌚ indicator lamp in the upper part of the centre console lights up and turns off after about 60 seconds → page 39.
- Close the front passenger door.
- While the ignition is switched on, check that the PASSENGER AIR BAG OFF ⌚ indicator lamp in the upper part of the centre console is *not* lit → page 39.

Disabling the front passenger front airbag

- Switch off the ignition.
- Open the front passenger door.
- Unfold the vehicle key bit → page 56.
- Using the key bit, turn the key-activated switch → Fig. 35 → ① to **OFF**.
- Remove the vehicle key from the key activated switch and fold the key bit inward.
- Close the front passenger door.
- The PASSENGER AIR BAG **OFF** indicator lamp in the upper part of the centre console is permanently lit while the ignition is on → page 39.

Disabled front passenger front airbag indicator

A disabled front passenger front airbag is indicated **exclusively** by the PASSENGER AIR BAG **OFF** indicator lamp permanently lit in the upper part of the centre console (**OFF** permanently-lit yellow light) → page 39.

When the PASSENGER AIR BAG **OFF** indicator lamp in the upper part of the centre console is **not permanently lit** or if it is lit together with the indicator lamp on the instrument cluster, no child restraint system must be assembled on the front passenger seat for safety reasons. The front passenger front airbag could be triggered in an accident.

⚠ WARNING

The front passenger front airbag may only be deactivated in special cases.

- Switch the front passenger front airbag on and off only while the ignition is switched off to prevent damages to the airbag system.
- The driver is responsible for the correct positioning of the switch activated by the key.
- Disable the front passenger front airbag only when, under special circumstances, there is a child seat mounted on the passenger seat.
- Enable the front passenger front airbag again as soon as the child seat is no longer being used on the front passenger seat.

ⓘ NOTICE

An insufficiently inserted key blade may get damaged when turning the key in the key activated switch.

ⓘ NOTICE

Do not leave the vehicle key inserted into the key activated switch as this may cause damage to the door lining, to the dash panel, to the key activated switch and to the vehicle key when closing the front passenger door.

Side airbags

📖 Please refer to ⚠ at the start of the chapter on page 38.

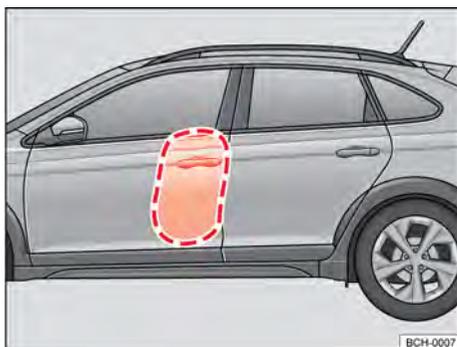


Fig. 36 On the left side of the vehicle: side airbag deployment zone.

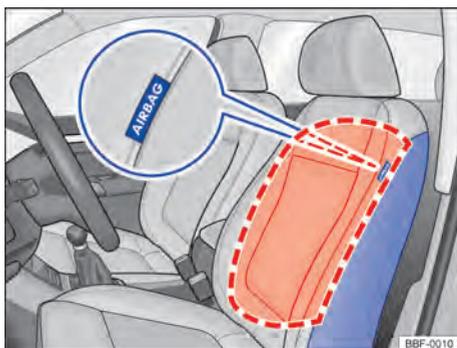


Fig. 37 Front seat side: installation location and deployment zone of the side airbags.

The side airbags are placed in the driver and front passenger seat's backrest outer padding → Fig. 37. Airbag installation locations are identified with the inscription "AIRBAG".

The red highlighted areas → Fig. 36 and → Fig. 37 are covered by the side airbags when triggered (deployment zones). For this reason, you must never leave or attach any items in these areas → ⚠.

In the case of a side collision, the side airbags on the collision side are triggered and thereby reduce the risk of injuries to the body parts turned towards the impact side of the vehicle's occupants.

⚠ WARNING

Once triggered, the airbag inflates at very high speed in a fraction of seconds.

- Leave the deployment zones of the side airbags clear.
- People, animals or objects must never be in-between the vehicle's front seat occupants, the rear side seat occupants and the airbag expansion areas. Ensure this is also followed by children and passengers.
- Hang only light clothes on the vehicle's clothing hook. Do not leave any heavy or cutting objects in the pockets.
- Do not install accessories on the doors.
- Apply only seat or protective covers expressly released for use in the vehicle. Otherwise the side airbag may not insufflate when triggered.

⚠ WARNING

Inadequate handling of the front seats may prevent the side airbags from operating correctly and cause serious injuries.

- Never remove the vehicle front seats or alter parts thereof.
- When excessively high forces are applied to the side supports of the seats backrest, the side airbags may not operate correctly, may not operate at all or be accidentally triggered.
- Damages to the original seat covers or to the seams in the area of the side airbag modules must be checked immediately by a Volkswagen dealership.

Curtain airbags

📖 Please refer to ⚠ at the start of the chapter on page 38.

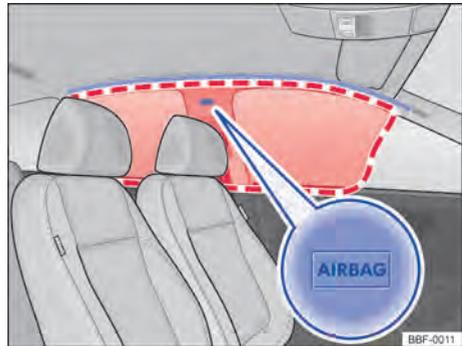


Fig. 38 Left side of the vehicle: location and deployment zone of the curtain airbag.

The vehicle is fitted with curtain airbags on the driver and front passenger side, above the doors → Fig. 38.

The installation locations of the curtain airbags are identified by the text "AIRBAG".

The red highlighted area is covered by the triggered curtain airbag (deployment area) → Fig. 38. Therefore, it is advisable not to place or fix objects in this area → ⚠.

Curtain airbags are deployed in the event of a side collision.

Curtain airbags reduce the risk of injuries for occupants in the front and rear seats, protecting the area of the body facing the side of the collision.

⚠ WARNING

Once triggered, the airbag inflates at high speed.

- Leave the deployment zones of the side airbags clear.
- Preferably do not place objects in the cover or the deployment area of the curtain airbag.
- People, animals or objects must never be in-between the vehicle's front seat occupants, the rear side seat occupants and the airbag expansion areas. Ensure this is also followed by children and passengers.

- Hang only light clothes on the vehicle's clothing hook. Do not leave any heavy or cutting objects in bags.
- Do not install accessories on the doors.
- Only install window curtains specifically authorized for use in the respective vehicle.
- Only fold the sun visor towards the side windows if no object is attached to the sun visor, such as pens or garage door openers.

Transporting children in the vehicle

Introduction

Child seats reduce the risk of injury in an accident. Always transport children in child seats, according to applicable laws!

Note:

- Child seats are grouped according to the child's size, age and weight.
- Installing child seats in the vehicle can be executed with different retaining systems.

For safety reasons child seats must preferably be mounted on the backseats → page 47, *Installation and child seat usage in the vehicle*.

Before transporting babies and children in child seats on the front passenger seat, it is imperative to read all airbag system information and learn about potential injuries airbag deployment can cause children in the 0 and 0+ group.

This information is very important for the safety of the driver and all passengers, especially babies and small children.

Volkswagen recommends using child seats from the Volkswagen Original Accessories Program. These child seats were developed and approved for use in Volkswagen vehicles.

WARNING

Children who are not strapped in or who are not strapped in properly could sustain severe or fatal injuries while the vehicle is in motion.

- Never leave a child seat facing backwards on the front passenger seat without disabling the airbag for risk of possible injuries from the triggered airbag.
- Volkswagen recommends to always transport children of age under 12 years or less than 1.50 m high on the rear seat.
- Always secure children in the vehicle with an authorised restraint system suitable to their height and weight.
- Always fasten children's seat belts or child seats, or secure all chairs transported to the ISOFIX system and ensure the proper sitting position.
- Ensure that the seat belt routing is correct for each use condition. If the seat belt must be passed over the child's body, ensure that the seat belt passes through the child's shoulder and never through the child's neck.
- Never allow children or babies to be transported on someone's lap, or while being held.
- Only ever fasten one child into each child seat.
- Read and observe the child seat's manufacturer instructions, especially regarding proper seat belt attachment.
- Replace child seats that withstand any force during an accident as they could have sustained damage that may not be visible.

WARNING

An unsecured, unoccupied child seat could be flung through the vehicle interior in the event of a sudden braking manoeuvre or accident. This could cause injuries.

- Always secure child seats safely, even if they are not being used, or have it safely stowed in the luggage compartment when driving.

Child seat types

📖 Please refer to ⚠ at the start of the chapter on page 45.

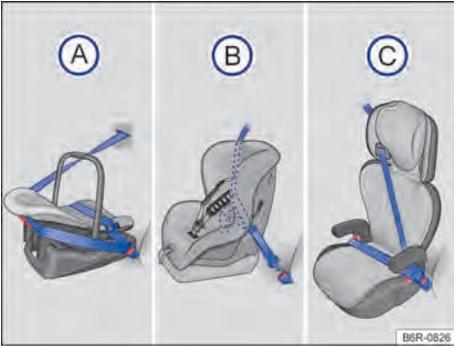


Fig. 39 Figures (A), (B) and (C) illustrate the main securing points for the child restraint system for children only wearing the seat belt.

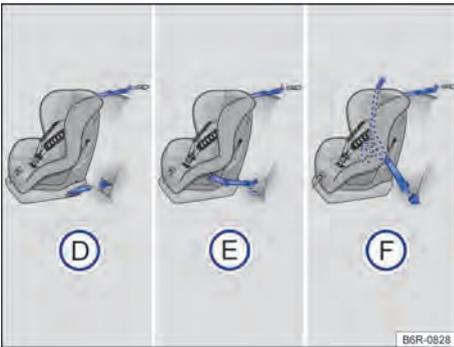


Fig. 40 On the rear seat: figures (D) e (E) illustrate the securing principle of the child retention system to the bottom retention eyes and the top tether. Figure (F) illustrates how to fasten the child restraint system with the vehicle seat belt and the top tether.

Always secure child seats properly, safely and in accordance with the installation instructions from the child seat manufacturer.

The mounted child seat must be secured by the vehicle's seat belts or the ISOFIX and Top Tether system and must not allow any longitudinal or transversal movement.

Country-specific standards for transporting children in vehicles

Child seats must conform to the ECE-R 44¹⁾ standard (Europe). Additional information can be obtained from your Volkswagen Dealership and online at www.volkswagen.com.

Country-specific securing systems

Child seat types → Fig. 39:

- (A) Portable crib or baby convenience seat
- (B) Child seat
- (C) Lifting seat

The systems are made up of attachments for child restraint systems for children wearing the seat belt in the rear seat.

Fastening variants → Fig. 40:

- (D) ISOFIX or i-Size retaining eyebolts and top fastening belt, type "Top Tether"
- (E) Universal LATCH and "Top Tether" type securing belt.
- (F) Automatic three-point seat belt and "Top Tether".

The systems show the securing of the child restraining system with a Top Tether securing belt and the bottom mounting points on the seat.

Group classification for child seats according to ECE-R 44

Weight class	Child's weight	Age
Group 0	up to 10 kg	up to approximately 9 months
Group 0+	up to 13 kg	up to approximately 18 months
Group 1	9 kg to 18 kg	approximately 8 months to 3 ¹ / ₂ years
Group 2	15 kg to 25 kg	approximately 3 to 7 years
Group 3	22 kg to 36 kg	approximately 6 to 12 years

In addition to age range, other aspects must be considered for child seat adjustment purposes, such as weight, height, and physical build of the child, since the child's biotype may not

¹⁾ ECE Regulation: Economic Commission for Europe-Regelung

correspond to the majority of the population within the same age range. In case of doubts, please contact a Volkswagen Dealership.

Child seats that have been tested and approved under the ECE R 44 standard bear the test mark firmly on the seat: a capital E in a circle, below the test number.

Child seats by approval categories

Child seats can have the approval category "universal", "semi-universal", "vehicle-specific" (all according to ECE-R 44) or "i-Size" (according to ECE-R 129).

(Universal): "universal" approved child seats are approved for installation in all vehicles. A template list is not required. With universal approval for ISOFIX, the child seat must be additionally secured using a top tether strap (Top Tether).

(Semiuniversal): a "semi-universal" approval requires, in addition to the normal requirements for universal approval, safety devices to secure the child seat that require additional testing. Child seats with "semi-universal" approval have a list of models in which the vehicle must be contained.

(Específica do veículo): a vehicle-specific approval requires, for each vehicle model, a dynamic test of the child seat in the vehicle, carried out separately. Child seats with "vehicle specific" approval also have a list of models.

(i-Size): child seats with "i-Size" approval must meet the requirements laid down in the ECE-R 129 standard with regard to installation and safety. Consult the child seat manufacturer to find out which child seats are approved for that vehicle according to i-Size.

Installation and child seat usage in the vehicle

📖 Please refer to  at the start of the chapter on page 45.

The laws of physics, which come into force on a vehicle during a collision or any other kind of accident, also apply to children → page 30. In contrast to adults and teenagers, however, children's

muscles and bones are not yet fully developed. Children have a higher risk for children of sustaining severe injuries in case of an accident.

Children must be transported using child restraint systems that are specifically suited to their size, weight and physical build, as children's bodies are not yet fully developed.

Country specific specifications

In relation to the use of child seats and their securing possibilities, there are divergent prescriptions and legal determinations in force in the different countries. Not all countries allow you to transport children on the front passenger seat. Legislation and legal requirements take precedence over the descriptions in this Owner's Manual.

Guidelines on the installation of a child seat

On the installation of a child seat, observe the following general guidelines. They are valid for all child seat securing systems.

- Read and follow the child seat manufacturer instructions → .
- Preferably mount the child seat on the rear bench seat behind the front passenger seat so that child may exit the vehicle on the sidewalk side.
- Disable the front passenger front airbag when mounting a child seat facing backwards on the front passenger seat.
- When mounting the child seat on the front passenger seat, position the front passenger seat fully back → page 28.
- Always leave sufficient clear space around the child seat. Adjust the seat in front of the child seat, if necessary. Observe and follow without fail the correct driver seat or front passenger seat position → page 28.
- The child seat backrest must fully rest against the vehicle seat backrest. Adjust the backrest position to have the child seat fully resting against it. Should the installed child seat touch the head restraint of the vehicle seat, preventing it from correctly resting on the vehicle's backrest, push the head restraint way up or remove and store it safely in the vehicle → page 72.

Airbag sticker

In the vehicle there will exist stickers with important information on the front passenger front airbag. The content depends on the country and may vary. Check the sticker attached to the driver and/or front passenger sun visor.

Prior installing a child seat backwards it is imperative to observe the warnings → .

Hazards of transporting children on the front passenger seat

Not all countries allow you to transport children on the front passenger seat.

Exceptions provided to transport children in the front seat → .

- When the number of children below the age of 10 exceeds the rear seat capacity. In this case, children with greatest stature may be transported in the front seat, using the vehicle's seat belt or the appropriate securing system according to the child's age.

The triggering of the front passenger front airbag while using a **backwards installed child seat** may result in severe or fatal injuries → .

A backwards installed child seat on the front passenger seat is to be used only when the front passenger front airbag is disabled. A disabled front passenger front airbag is indicated by a PASSENGER AIR BAG OFF ; warning light permanently lit on the centre console. Disabling the front passenger front airbag → page 42.

Do not disable the front passenger front airbag when using a **forward turned child seat**. When installing a child seat, adjust it to be as far as possible from the front passenger front airbag, also respecting the child seat's installation guidelines. The triggering of the front passenger front airbag may cause severe injuries → .

Not all child seats have been approved for use on the front passenger seat. The child seat must have been specially approved by the manufacturer for its use on the front passenger seat of vehicles with front and side airbags. Volkswagen Dealerships keep an up-to-date list of approved child seats.

Hazards related with side airbags

When triggered, the side airbag may hit the child's head and severely injure the child → .

DANGER

Never use child seats facing backwards in the front passenger seat while the front passenger airbag is activated. The child may be killed upon front airbag deployment, since the child seat is impacted with great strength and projected against the backrest.

DANGER

Using child seats backwards on the front passenger seat increases the risk of severe or fatal injuries to the child in case of an accident.

- Disabling the front passenger front airbag. If the front passenger front airbag cannot be disabled it is not permitted to use child seats turned backwards.
- Use only child seats approved by the child seat manufacturer for use on the front passenger seat with front and side airbag.

WARNING

Risk of injury with incorrectly installed child seats.

- Observe and follow the child seat manufacturer's installation instructions and warnings.

WARNING

Risk of injury when using a child seat turned frontward on the front passenger seat.

- Position the front passenger seat as far back as possible, based on the child seat's installation instructions, in order to ensure the child seat remains as far away as possible from the front passenger front airbag.
- Place the seat backrest in a vertical position that allows the child seat to fit in place.
- The seat belt height adjustment must be adjusted to the most adequate position for the height of the child or the child seat.
- Use only child seats approved by the child seat manufacturer for use on the front passenger seat with front and side airbag.

WARNING

In the event of an accident, the rear seat is the safest place for children with properly fastened seat belts. ▶

- A suitable child seat, correctly fitted and used on one of the rear seats, will provide the maximum level of protection for children up to 12 years old in most accident scenarios.

⚠ WARNING

To prevent injuries from a triggered curtain or side airbag:

- Ensure that the child is not in the airbag's deployment zone → page 38, *Airbag system*.
- Do not place objects in the side airbag's deployment zone.

Attaching the child seat using the lower anchor points (ISOFIX, i-Size or LATCH)

📖 Please refer to ⚠ at the start of the chapter on page 45.



Fig. 41 On the vehicle seat: identification of lower retaining rings for child seats.

The 2 retaining rings for each child seat equipped with ISOFIX system or i-Size can be accessed through the openings on the rear seat lining → Fig. 41.

ISOFIX installation overview

Depending on the size category **A** to **G** of the ECE-R 16¹⁾ European standard, the possibilities of installing child seats to the ISOFIX retaining system on the respective vehicle seats are listed in the following table.

	Group (weight class) of child seats with ISOFIX									
	Group 0: up to 10 kg		Group 0: up to 10 kg			Group 1: 9 to 18 kg				
			Group 0+: up to 13 kg							
Installation direction	Rear-facing (opposite to the driving direction)		Rear-facing (opposite to the driving direction)			Rear-facing (opposite to the driving direction)		Front-facing (driving direction)		
Size class	F	G	C	D	E	C	D	A	B	B1
Installation on the front passenger seat:	Seat without retaining rings; ISOFIX/LATCH fastening not available									
Installation in rear seats	IL-SU		IL-SU			IL-SU		IUF/IL-SU		

IL-SU: suitable seat to install child seats with ISOFIX, with "semi-universal" approval; refer to the list of vehicles of the child seat manufacturer.

IUF: suitable seat to install child seats with ISOFIX, with "universal" approval and Top Tether seat belt support.

Installing child seats with ISOFIX or i-Size

The installation location of the lower anchor points is marked with an ISOFIX symbol or an i-Size symbol.

¹⁾ ECE Economic Commission for Europe-Regelung



Identification of ISOFIX anchorage points for child seats on rear seats.



Identification of i-Size anchorage points for child seats on rear seats.

Child seats with rigid attachment (ISOFIX or i-Size)

Guides can be used to install fixed-slot child seats, if provided along with the respective child seat. Guides assembled before the seat's coupling to the ISOFIX retaining rings facilitate the installation process and preserve the seat lining. Guides are locked in both of the vehicle's ISOFIX retaining rings → ⓘ.

- Observe and follow the instructions → page 47, *Installation and child seat usage in the vehicle*.
- Follow the child seat manufacturer's instructions when installing or removing child seats → ⚠.
- Fit the child seat onto the retaining rings → Fig. 41 in the direction of the arrow. The child seat must be safely and audibly (clicking sound) secured in place.
- Push the head restraint fully upwards or remove it altogether to prevent interference with the child seat → page 72.
- Perform a traction test in both sides of the child seat to ensure both locks are secured.

Child seat with adjustable tethers (LATCH)

- Observe and follow the instructions → page 47, *Installation and child seat usage in the vehicle*.
- Follow the child seat manufacturer's instructions when installing or removing child seats → ⚠.

- When fastening belts are provided along with the child seat, place the child seat on the seat surface and hook the fastening belt hooks to the retaining rings → Fig. 41.
- Push the head restraint fully upwards or remove it altogether to prevent interference with the child seat → page 72.
- Evenly stretch the fastening belts in the respective adjustment device. The child seat must be properly supported on the vehicle seat.
- Perform a traction test in both sides of the child seat to ensure both locks are secured.

⚠ WARNING

The lower child seat retaining rings must not be used as cargo strapping rings. Only secure appropriate child seats in the lower retaining rings.

- Only the fastening belts provided with the respective child seat must be used to secure child seats with adjustable tethers (LATCH). Adapted or improvised belts must never be used to secure child seats.

ⓘ NOTICE

- In order to prevent permanent upholstery damages, the fixed-slot fitting guides (ISOFIX) must be removed from the retaining rings whenever the child seat is not installed to the vehicle's retaining rings.
- In order to avoid damages to fabrics, upholstery or guides, the fixed-slot fitting guides (ISOFIX) must always be removed from the retaining rings before folding the rear seat forward. ◀

Securing child seats with Top Tether

📖 Please refer to ⚠️ at the start of the chapter on page 45.



Fig. 42 retention eyes for the top tether on the back side of the rear seat.

Besides being secured to the ISOFIX anchoring points, ISOFIX child seats with universal approval must also be secured with a top tether.

Secure the top tether only to the appropriate retention eyes. The appropriate eyes for the top tether are identified by a symbol, and, if the case, by the inscription "TOP TETHER".

- Observe and follow the instructions → page 47, *Installation and child seat usage in the vehicle*.
- Follow the child seat manufacturer's instructions when installing or removing child seats → ⚠️.
- Push the head restraint fully upwards or remove it altogether to prevent interference with the child seat → page 72.

- Secure the child seat to the lower ISOFIX retaining rings → page 49. The seat must be securely and audibly fitted into place (clicking sound).
- Open the rear lid and remove the luggage compartment cover → page 196.
- Case provided with the child seat, place the child seat Top Tether over the rear seat backrest, securing it to the retaining ring located on the back of the seat backrest → Fig. 42.
- Stretch the upper tether until the child seat rests against the upper part of the seat backrest.
- Install the luggage compartment cover → page 196.

Reinstall the headrest after installing the child seat → page 72.

⚠️ WARNING

Child seat with lower retaining rings and top tethers must be assembled as per the manufacturers' instructions. Otherwise, users may be subject to severe injuries.

- Always secure only *one* top child seat strap to one retaining ring in the luggage compartment.
- Always use appropriate retaining rings for the respective straps.
- Never secure straps to strapping eyelets.
- Only the belt provided along with the respective child seat (if available) must be used in the Top Tether. Adapted or improvised tethers cannot be used.

Securing child seats using the seat belt

📖 Please refer to ⚠️ at the start of the chapter on page 45.

Universal child seats may be secured with the seat belt of seats indicated on the table with **u**. When such seats cannot be secured, an **x** is indicated.

Weight class	Child seat assembly direction	Front passenger seat		Rear side seats	rear central seat
		Front passenger airbag enabled	Front passenger airbag disabled		
Group 0 : up to 10 kg	Secured opposite to the driving direction	X	u	u	X
Group 0+ : up to 13 kg	Secured opposite to the driving direction	X	u	u	X
Group 1 : 9 to 18 kg	Secured opposite to the driving direction	X	u	u	X
	Secured in the driving direction	u	X	u	X
Group 2 15 to 25 kg	Secured in the driving direction	u	X	u	X
Group 3 22 to 36 kg	Secured in the driving direction	u	X	u	X

Securing child seats using the seat belt

- Observe and follow the instructions → page 47, *Installation and child seat usage in the vehicle*.
- Read and follow the instructions provided by the child seat manufacturer.
- If the child seat is assembled on the front passenger seat, push the front passenger seat as far back as possible and adjust the backrest to an upright position to comfortably fit the child seat → page 28.
- The seat belt height adjustment must be adjusted to the most adequate position for the height of the child or the child seat.
- Place the child seat over the seat and pass the seat belt as per the child seat manufacturer's instructions.
- Push the head restraint fully upwards or remove it altogether to prevent interference with the child seat → page 72.
- Ensure that the seat belt is not twisted.
- Insert the seat belt latch plate into the respective buckle until a "clicking" sound is heard.
- The seat belt must lie firmly and adequately over the child seat or the child.

- Child seats must never be supported on the seat belt latch.
- Conduct seat belt traction test – ensure that the lower belt strap is locked and can no longer be pulled out.

Removing child seats

Unfasten seat belts only when the vehicle is stationary → .

- Press the red button in the buckle. The latch plate is released and springs out.
- Guide the belt back by hand so that it rolls up easily, without twisting the seat belt and without damaging the trim.
- Remove the child seat from the vehicle according to the instructions given by the child seat manufacturer.

WARNING

Unfastening seat belts while the vehicle is in motion can lead to severe or fatal injuries in the event of an accident or sudden braking or driving manoeuvres.

- Unfasten seat belts only when the vehicle is stationary.



Childproof lock

📖 Please refer to ⚠ at the start of the chapter on page 45.

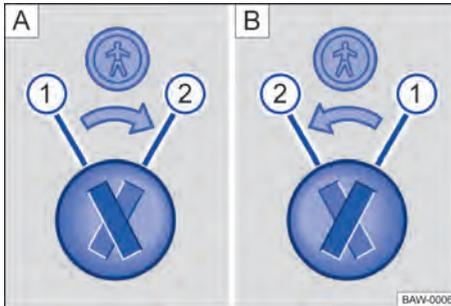


Fig. 43 Childproof lock: **A** rear left door, **B** rear right door.



Fig. 44 On the rear door (right-hand side): childproof lock.

Key for → Fig. 43:

- ① Childproof lock disabled.
- ② Childproof lock enabled.

The childproof lock prevents the rear doors from being opened from the inside (e.g. so that children cannot open the doors accidentally while the vehicle is in motion).

When the childproof lock is activated the door can only be opened from the outside.

Enabling or disabling the childproof lock

- Unlock the vehicle and open the respective rear door.
- Fold the vehicle key blade out → page 56.
- Insert the key blade into the childproof lock groove to enable or disable the lock → Fig. 43.

⚠ WARNING

When the childproof lock is enabled, the door cannot be opened from the inside.

- Never leave unattended children or people with special needs in the vehicle with the doors locked. This may mean that these people lock themselves in the vehicle in case of emergencies. Locked individuals can be exposed to extremely high or low temperatures or lack of breathable air.
- Depending on the time of year, locked vehicles can be subjected to extremely high or low temperatures. This can cause serious injuries and illness or fatalities, particularly for small children.

In an emergency

Making you and your vehicle safe



Fig. 45 On the upper portion of the centre console: warning lamp switch.

Observe any legislation concerning the safety of a broken down vehicle. For example, many countries stipulate that you have to switch on the hazard warning lights → page 55.

Checklist

To ensure your own safety and the safety of your passengers, observe the following points in the order given → :

1. Stop the vehicle at a safe distance away from moving traffic and on a suitable surface → .
2. Switch on the hazard warning lights with the  → Fig. 45 button.
3. Apply the handbrake → page 133.
4. Vehicles with manual gearbox: move the gear shift lever into the neutral position → page 104
5. Vehicles with automatic gearbox: position the selector lever to P → page 106.
6. Stop the engine and remove the key from the ignition lock → page 98.
7. Ensure that all occupants exit the vehicle away from moving traffic and proceed to a safe position, e.g. behind the guardrail.
8. Take all vehicle keys with you when you leave the vehicle.
9. Place the warning triangle in position to draw the attention of other road users to your vehicle.
10. Allow the engine to cool down and, if necessary, seek expert assistance.

When the hazard warning lights are switched on, all turn signals flash at the same time. The turn signals   and an indicator light at the switch  flash at the same time. The hazard warning lights also work when the ignition is switched off.

Lit indicator lights could indicate a change in direction or lane while towing or by activating the turn signal lever. The indicator lights are temporarily interrupted.

Examples in which hazard warning lights must be switched on:

- When traffic ahead suddenly starts moving more slowly or you reach the tail end of a traffic jam. This will warn vehicles behind you.
- When there is an emergency.
- When the vehicle breaks down.
- When being towed.

Always follow local regulations for the use of the hazard warning lights.

If the hazard warning lights are not working, use an alternative method of drawing attention to the broken down vehicle (according to applicable legal provisions).

Emergency brake lights - ESS (Emergency Stop Signal)

For vehicles with ESS function and anti-lock brake system (ABS), during sudden and continuous braking at speeds greater than 80 km/h, the brake light lamp may flash to warn cars coming in from behind.

If the braking manoeuvre is further extended, maintaining the same deceleration rate, the warning lights are automatically activated and flash when the vehicle reaches a speed lower than approximately 10 km/h. Upon resuming vehicle movement, warning lights are automatically deactivated.

Warning lamps may also be switched off via the  dash panel → Fig. 45 switch.

WARNING

Broken-down vehicles lacking due signalling increase the risk of accidents both for you and for other road users.

- Stop the vehicle as soon as possible in a safe location.
- Park the vehicle at a safe distance from moving traffic in order to lock all doors securely in an emergency.
- Switch on the hazard warning lights and set up the warning triangle to warn other road users.
- Never leave unattended children or people with special needs in the vehicle with the doors locked. This may mean that they are locked in the vehicle in an emergency. Persons locked in the vehicle may be exposed to extremely high or low temperatures.

WARNING

Ignoring any of the points on this important safety checklist can lead to accidents and injuries.

- Always follow the instructions on the checklist and comply with applicable safety precautions. ▶

⚠ WARNING

The components of the exhaust system become very hot. This can cause fires and serious injuries.

- Never park the vehicle so that parts of the exhaust system can come into contact with inflammable material underneath the vehicle, e.g. dry grass, fuel, etc.

i The vehicle battery will discharge if the hazard warning lights are left on over a long period of time – even if the ignition is switched off.

i Whenever airbags are activated in accidents, warning lights may be automatically activated → page 41.

The fire extinguisher must correspond to the legal requirements, be always ready for use, and be regularly inspected (see the inspection seal on the fire extinguisher).

⚠ WARNING

Loose objects may be projected inside the vehicle in the event of a sudden driving or braking manoeuvre, as well as during accidents, and may cause severe injuries.

- Secure the warning triangle in the respective straps.

i The warning triangle must comply with applicable legal provisions in each country. ◀

Emergency equipment

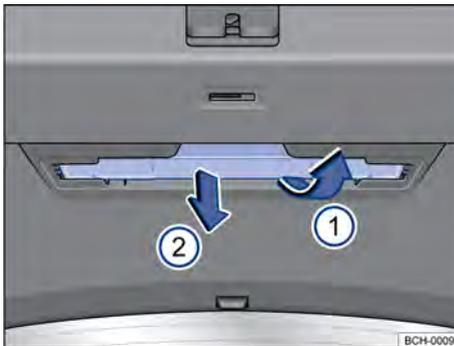


Fig. 46 On the rear lid: warning triangle holder.

Warning triangle

The warning triangle may not be available for some export markets.

With the rear lid open, remove the support from the housing → Fig. 46 (arrow) and remove the warning triangle.

After using the triangle, place it back into the housing

Fire extinguisher

The fire extinguisher may not be available for some export markets.

According to the vehicle version, the fire extinguisher support may be situated in the footwell under the front passenger seat.

Open and close

Vehicle key

Vehicle key functions

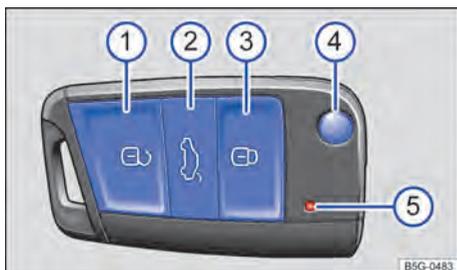


Fig. 47 Vehicle key.

Key for → Fig. 47:

- ① Central locking button: unlock the vehicle.
- ② Unlock the rear lid separately.
- ③ Central locking button: lock the vehicle.
- ④ Folding and unfolding the key blade.
- ⑤ Indicator lamp: flashes after pressing the button.

Locking or unlocking the vehicle from the outside

- *Unlock*: press . Keep pressed for convenience opening.
- *Lock*: press . Keep pressed for convenience closing.
- Press the  button → page 65. The rear lid is unlocked.
- *Lock*: all lights flash *once* to confirm.
- *Unlock*: all lights flash *twice* to confirm.

Note: according to the central locking function setting on the radio system → page 26, all doors and the boot lid will only be unlocked after the  button is pressed for the second time.

It is possible to enable/disable the sound signal (horn) of the alarm activation/deactivation confirmation. Depending on the vehicle and radio version, on the radio system's button , in the menu **Vehicle settings** OR touching the selection surface  and function button  to enable or

disable the sound warning → page 26. For the remaining vehicles go to a Volkswagen dealership to enable/disable the audible confirmation.

⚠ WARNING

Improper or unsupervised use of the vehicle keys can cause severe accidents or injuries.

- Always take all vehicle keys with you every time you leave the vehicle. Children or unauthorised persons could lock the doors and boot lid, start the engine, switch on the ignition and thus operate electrical equipment, such as the electric windows.
- Never leave unattended children or people with special needs in the vehicle. They could become trapped in the vehicle in an emergency and may not be able to get themselves to safety. Depending on the time of year, for example, locked vehicles can be subjected to very high or very low temperatures. This can cause serious injuries and illness or fatalities, especially for small children.
- Never remove the vehicle key from the ignition lock when the vehicle is in motion.

ⓘ NOTICE

Every vehicle key contains electronic components. Protect the key from damage, moisture and excessive vibration.

 Press the buttons on the key only when the corresponding function is actually needed. Pressing a button when the function is not required could lead to the vehicle being unlocked unintentionally or the alarm going off. This also applies when it is believed to be beyond the effective range. ◀

Replacing the battery

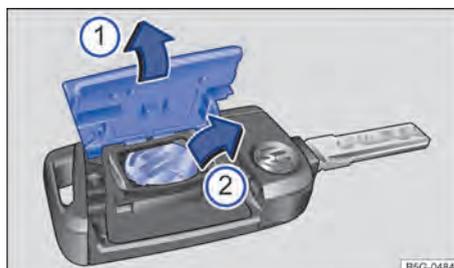


Fig. 48 Vehicle key: replacing the battery. ▶

Key for → Fig. 48:

- ① Remove the cover.
- ② Remove the battery.

Volkswagen recommends having the battery changed by a Volkswagen Dealership.

- Fold the vehicle key blade out.
- Remove the cover ① in the direction of the arrow → ①.
- Remove the battery from the battery compartment using an appropriate tool ②.
- Position the new battery and push it in the opposite direction to the arrow ② into the battery compartment → ②.
- Press the cover in the opposite direction of the arrow ① onto the vehicle key housing until it engages.

DANGER

Should 20 mm diameter batteries or other lithium batteries be swallowed, severe or even fatal injuries may result within a short period of time.

- Always keep the vehicle key, key ring with batteries, spare batteries, round cells and other batteries out of the reach of children.
- Seek medical assistance immediately if you suspect someone has swallowed a battery.

NOTICE

- The vehicle key may be damaged if the battery is improperly changed.
- Unsuitable batteries may damage the vehicle key. Discharged batteries should only be replaced with new batteries of the same voltage rating, size and specification.
- Ensure that the battery is fitted the right way round.

 The batteries contain toxic substances. This product cannot be disposed / discarded along with common trash. There are specific legal requirements regarding the disposal / discarding of used batteries. For your safety and convenience, Volkswagen recommends replacing the battery only at a Volkswagen Dealership.

Synchronize the vehicle key

When it is impossible to unlock or lock the vehicle with the vehicle key, synchronize the vehicle key or replace the battery → page 56.

- Fold the vehicle key blade out.
- Remove the protective driver side door handle cover → page 61.
- Press the vehicle key button . Meanwhile, remain next to the vehicle.
- Use the key bit to open the vehicle within one minute. The synchronization process will be completed.
- Reinstall the protective driver side door handle cover.

Troubleshooting

Vehicle cannot be locked or unlocked

The remote control vehicle key may be temporarily disabled due to obstacles, bad weather conditions, weak battery, or excessive transmitters operating in the same frequency range near the vehicle (e.g. mobile phones or transmitters).

OR: if the buttons in the vehicle key or one of the central locking buttons are pressed repeatedly within a short period of time, the central locking system will switch off briefly to prevent overloading. The vehicle will then be unlocked. Lock the vehicle if necessary.

The indicator lamp does not flash

When the indicator lamp of the vehicle key does not flash, this may indicate that the battery or the key itself must be replaced → page 56.

Spare key

To acquire a key for the vehicle, the vehicle identification number is required.

Several vehicle keys may be valid for a vehicle.

New vehicle keys can be obtained at a Volkswagen Dealership.

Keyless locking and starting system "Keyless Access"

Introduction

Depending on the vehicle version, the Keyless Access locking and starting system may not be available.

The Keyless Access locking and starting system enables that the vehicle be unlocked and locked without the active use of the key. For such, a valid vehicle key must be located near the vehicle.

Unlocking or locking the vehicle with Keyless Access

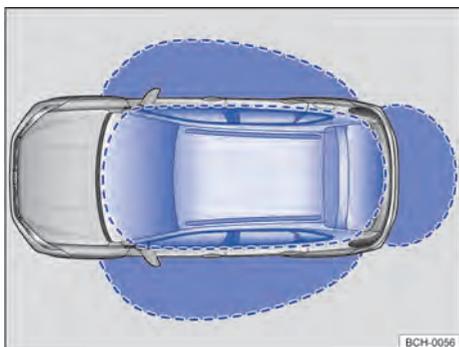


Fig. 49 Keyless Access: proximity areas.

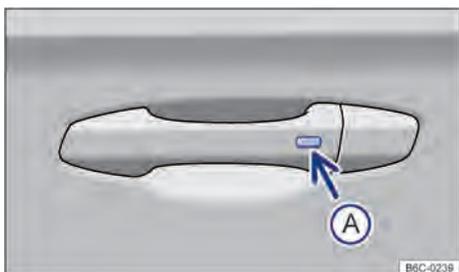


Fig. 50 On the door handle: button to unlock or lock.

(A) Button on the outside of the door handle.

Unlocking the vehicle

- 1 Press the button → Fig. 50 (A) on the outside of the door handle.

Locking the vehicle

- 1 Park the vehicle and switch off the ignition.
- 2 Press the button → Fig. 50 (A) on the outside of the door handle.

Unlocking is indicated by a *double* flash of all the turn signals, locking is indicated by a *single* flash.

Unlock and lock the boot lid

- ◀ When the vehicle is locked and a vehicle key is within the proximity range → Fig. 49 of the boot lid, the lid automatically unlocks when being opened.

The boot lid is automatically locked after its closing.

When the vehicle is fully unlocked, the boot lid does **not** lock itself automatically after being closed.

Disable the Keyless Access temporarily

So that unauthorized third parties do not unlock and start the vehicle improperly, it is possible to temporarily deactivate the Keyless Access unlocking function:

- Lock the vehicle with the  button on the vehicle key.
- Within 5 seconds, press the button on the outside of the door handle → Fig. 50 (A). So, don't grab the door handle. The Keyless Access locking and starting system is temporarily disabled.
- To confirm the system is disabled, wait at least 10 seconds and pull the door handle. The door must not open.

The vehicle can only be unlocked with the vehicle key. After the next unlocking the Keyless Access is again enabled.

Configure Keyless Access

Depending on the radio version, Keyless Access can be configured in the menu Car from the radio. ▶

Keyless Access can be configured in two ways:

- **Single door:** by pressing the button once, only the respective door is unlocked. When pressed again, all doors are locked.
- **All doors:** By pressing the button once, all doors are unlocked. When pressed again, all doors are locked.

NOTICE

For vehicles with the Keyless Access function, when the central locking is already activated and the vehicle key is accidentally left inside the luggage compartment, upon closing the boot lid, it locks and automatically unlocks again.

 With a low or flat vehicle or key battery, the vehicle may possibly not be unlocked or locked by means of the Keyless Access. The vehicle may be manually unlocked or locked → page 61.

 To make it possible to control a successful locking of the vehicle, disable the unlocking function for a few seconds.

 A vehicle with automatic gearbox can only be locked when the selector lever is in the **P** position.

 If the sensor surface is touched twice, interior monitoring is switched off and the door opening monitoring system remains active. <

Troubleshooting

All turn signals flash four times

– The last used vehicle key is still in the vehicle.

 If no valid vehicle key is inside the vehicles interior, or if same is not recognized, a corresponding message will be displayed on the instrument cluster display. This may be the case when the vehicle key suffers interference from another radio signal or when covered by another object, for example, an accessory for mobile devices or an aluminium suitcase. <

Central locking button and doors

Introduction

The doors and boot lid can be manually locked and partially unlocked, for example, when the vehicle key or central locking system fails.

The central locking locks all the doors and the boot lid. The vehicle *cannot* be locked with the driver door open.

The vehicle can only be locked when the ignition is turned off or when the driver leaves the vehicle with the engine turned off.

A symbolic representation → page 12 on the instrument cluster display indicates that one or more doors are not closed.  **Stop driving!** Open the respective vehicle door and close it again.

These symbols are also visible when the ignition is switched off. The indicator turns off a few minutes after the vehicle is locked with the doors closed.

WARNING

Door that are not closed properly can open suddenly while the vehicle is in motion and may cause severe injuries.

- In this case, stop the vehicle immediately and close the door.
- Ensure that the door is closed properly and that the lock has engaged.
- Doors must only be opened or closed after ensuring there is nothing or no one is in its path.

WARNING

Doors that are being held open by the door check may close in strong winds or if the vehicle is on a slope, which may result in injuries.

- Always keep a good grip on the handle when opening and closing doors.

WARNING

The path of the doors is a dangerous area and may cause injuries.

- Doors should only be opened or closed when you are sure that nobody is in their path. ▶

WARNING

An emergency closing or opening of the doors without sufficient care may result in severe injuries.

- When the vehicle is locked from the outside, it is not possible to open the doors and the electric windows from the inside.
- Never leave unattended children, animals or people with special needs in the vehicle. They could become trapped in the vehicle in an emergency and may not be able to get themselves to safety.
- Depending on the time of year, for example, locked vehicles can be subjected to very high or very low temperatures. This can cause serious injuries and illness or fatalities, especially for small children.

WARNING

Improper use of the central locking system could cause serious injuries.

- The central locking system locks all doors. Locking the vehicle from the inside may prevent the doors from being opened unintentionally and unauthorised persons from entering the vehicle. However, locked doors can delay assistance to passengers inside the vehicle in the event of an accident or emergency.
- Never leave unattended children or people with special needs in the vehicle. All doors can be locked from the inside using the central locking button. This may mean that people lock themselves in the vehicle. Persons locked in the vehicle may be exposed to extremely high or low temperatures.
- Depending on the time of year, locked vehicles can be subjected to extremely high or low temperatures. This can cause serious injuries and illness or fatalities, particularly for small children.
- Never leave anyone inside a locked vehicle. They could become trapped in the vehicle in an emergency and may not be able to get themselves to safety.
- Open and close doors and the boot lid only when there is no one near its opening/closing range.

NOTICE

When carrying out an emergency opening or closing procedure, remove and install parts carefully in order to avoid damage to the vehicle. 

Driver door indicator lamp

 Please refer to  and  at the start of the chapter on page 59.

The central locking indicator lamp is located in the driver door → page 8.

The vehicle locks: the red LED flashes for about two seconds in short intervals, then more slowly. The indicator lamp does *not* flash, when the vehicle was locked with the locking button of the central locking system in the driver door → page 61. 

Automatic locking and unlocking

 Please refer to  and  at the start of the chapter on page 59.

The central locking system enables you to lock and unlock all doors, the boot lid and the tank flap.

Depending on the vehicle and radio version, central locking settings can be set in the radio system with the button  OR function button  and function button  → page 26.

Automatic locking (Auto Lock)

The vehicle locks automatically upon reaching a speed of approximately 20 km/h. When the vehicle is locked, the indicator lamp  on the central locking button will shine in yellow.

Automatic unlocking (Auto Unlock)

When one of the following condition occurs, all the doors and the boot lid are automatically unlocked:

- The vehicle is stopped and the vehicle key has been removed (*only for vehicles without Keyless Access*).
- **OR:** the vehicle is stationary and the  button was pressed. 

- **OR:** the door handle was activated to open the door.
- **OR:** the airbags were triggered in an accident → page 41.

The automatic unlocking enables the access of rescuers to the interior of the vehicle.

A vehicle with automatic gearbox can only be locked when the selector lever is in the **P** position.

Central locking button

Please refer to  and  at the start of the chapter on page 59.



Fig. 51 On the driver door: central locking button.

Key for → Fig. 51:

-  Unlocks the vehicle.
-  Lock the vehicle.

The central locking button works either with the ignition on or off, only when all doors are closed.

If the vehicle was locked with the vehicle key, the central locking buttons will be disabled.

If the vehicle was locked from the inside with the central locking button, then:

- The indicator lamp  on the button lights up in yellow when all the doors and the boot lid are closed.
- The anti-theft alarm system will **not** be activated.

The doors can be opened from the inside by pulling the door handle. The indicator lamp  on the button turns off. The doors that were not opened, as well as the boot lid, remain locked and may not be opened from the outside.

Closing or opening the driver door in case of emergency

Please refer to  and  at the start of the chapter on page 59.

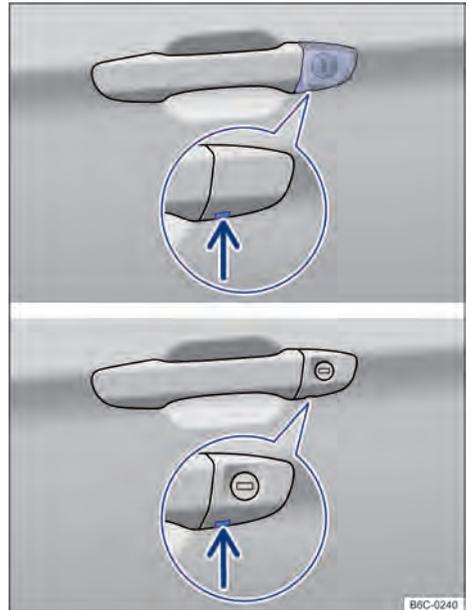


Fig. 52 Driver's door handle: lock cylinder.

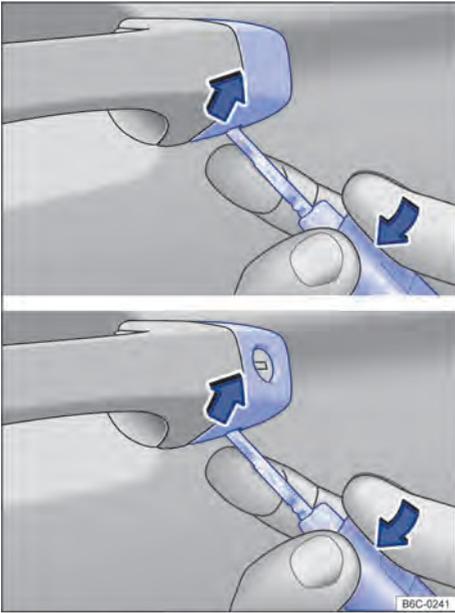


Fig. 53 Driver's door handle: remove cover.

All doors are usually locked when manually locking the door. Only the driver door is manually unlocked. Observe the anti-theft alarm instructions → page 59.

- Unfold the vehicle key bit .
- Insert the key blade from underneath into the cover opening → Fig. 52 (arrow).
- Keep the index finger underneath the key blade.
- Lift the cover cap with the vehicle key in the direction indicated by the arrow → Fig. 53.
- Insert the key blade into the lock cylinder and lock/unlock the vehicle.
- Pull the door handle and put the cover cap back on again.

Particularities of manual unlocking

- The anti-theft alarm remains enabled in the unlocked vehicle. However no alarm is triggered → page 63.
- The alarm is triggered immediately after opening the driver's door.

- Upon turning on the ignition, the electronic immobiliser recognizes a valid vehicle key and disables the anti-theft alarm.
- After unlocking an emergency start must be performed → page 102.

i The anti-theft alarm is activated after manually locking the vehicle with the key blade → page 61. ◀

Locking the front passenger door and rear doors in case of emergency

📖 Please refer to **⚠** and **ⓘ** at the start of the chapter on page 59.

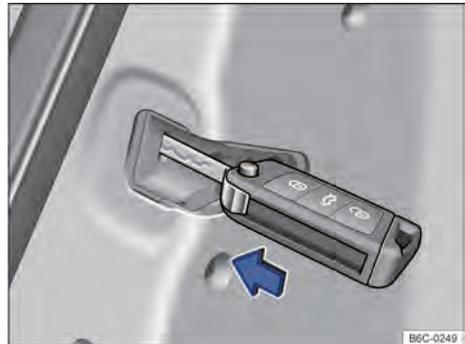


Fig. 54 On the doors, front right and rear: emergency locking of the vehicle with the metallic stem of the key.

The front passenger door and the rear doors can be manually locked. The anti-theft alarm system will **not** be activated.

- Open the door.
- Insert the metal shaft of the wrench into the slot → Fig. 54 and press.
- Close the door completely.
- Check that the door is locked by the external handle.
- Repeat this process in other doors, if necessary.

i The doors can be unlocked and opened from inside by pulling the interior door handle. ◀

Troubleshooting

📖 Please refer to ▲ and ⌚ at the start of the chapter on page 59.

Indicator lamp of the driver door permanently on

The LED light on the driver door flashes at short intervals and thereafter remains lit for about 30 seconds, flashing again thereafter.

The locking system is malfunctioning.

- Contact a Volkswagen Dealership.

The doors and boot lid can be manually unlocked or locked when the vehicle remote control key or central locking system → page 62 e → page 66 fails.

Turn signals do not flash

When the turn signals do *not* flash to confirm the locking of the vehicle:

- At least one of the doors or the boot lit is not shut.

Vehicle automatically locked

When one of the following conditions is applied, the vehicle locks itself automatically after about 30 seconds.

- The vehicle was unlocked but not opened.
- The ignition was not turned on.
- The boot lid was not opened.

Procedure when locking with a second vehicle key

Keyless Access: the vehicle key that is inside the vehicle is blocked against engine starting as soon as the vehicle is locked from the outside by a second vehicle key. Press the  button on the vehicle key left inside the vehicle to enable it to start the engine → page 98.

Locking the vehicle after airbag deployment

The entire vehicle is unlocked when the airbags are triggered during an accident. Depending on the level of damage, the vehicle may be locked as follows after an accident:

- Switch off the ignition.
- Open and close one of the doors once.

- Remove the key from the vehicle and close → page 56.
- **OR:** press the central locking  button in the driver door → page 61.

 With a low or flat vehicle or key battery, the vehicle may possibly not be unlocked or locked by means of the Keyless Access. The vehicle may be manually unlocked or locked → page 62.

 If no valid vehicle key is inside the vehicles interior, or if same is not recognized, a corresponding message will be displayed on the instrument cluster display. This may be the case when the vehicle key suffers interference from another radio signal or when covered by another object, for example, an accessory for mobile devices or an aluminium suitcase. ◀

Anti-theft alarm system

The anti-theft alarm system is automatically engaged when locking the vehicle with the vehicle key or pressing the button on the door handle, for vehicles with Keyless Access.

The anti-theft alarm emits audible warning signals for about 25 seconds (per event) and visual warning signals for up to 5 minutes when the following non authorized actions are executed to the locked vehicle:

When does the system trigger an alarm?

- A door is opened.
- The engine compartment cover is opened.
- The boot lid is opened.
- Turning the ignition on with a non-valid vehicle key.
- One of the windows is removed, broken or opened.
- Movement inside the vehicle, for vehicles with interior movement monitoring system → page 64. ▶

Switching off the alarm

- Unlocking the vehicle with the  unlocking button of the vehicle key.
- **OR:** turning the ignition on with a valid vehicle key. A brief alarm may occur for about a second.
- On vehicles with Keyless Access, the alarm can also be disabled by touching the door handle → page 58.

 The alarm goes off once again if, after the previous trigger, a new attempt to break into the same vehicle area or another protected area occurs.

 The anti-theft alarm system is **not** activated by locking the vehicle from inside with the central locking button .

 When the driver door is mechanically unlocked with the key, only the driver door is unlocked, not the entire vehicle. The central locking button is only enabled after the ignition is switched on, after which all doors can be electrically unlocked.

 The anti-theft alarm will not function correctly if the vehicle battery is weak or discharged.

Interior monitoring system



Fig. 55 On the roof console: vehicle interior monitoring sensors (arrows).

When movement is detected in the interior of a vehicle locked externally, the alarm is triggered and goes off → Fig. 55.

Switching on the interior monitoring system

Lock the vehicle using the remote control or mechanical vehicle key. When the anti-theft alarm is switched on, the interior monitoring system is also activated.

Temporarily disabling the vehicle interior monitoring system

- Switch on the ignition.
- Disable the vehicle interior monitoring system in the radio system button  **OR** selection button  and function button  → page 26, depending on the vehicle and radio versions.
- Close all doors and the boot lid.
- Lock the vehicle with the vehicle key.

The vehicle interior monitoring system is disabled until the next vehicle locking.

Under the following situations it is advisable to disable the vehicle interior monitoring:

- When the vehicle needs to be carried.
- When the vehicle is transported.
- When the vehicle needs to be towed with suspended axle.
- When the vehicle needs to be put in an automatic vehicle washing system.

Risk of false alarm

The vehicle interior monitoring only works with the vehicle completely shut. Legal provisions must be followed. An alarm failure may occur under the following situations:

- If a window is fully or partly open.
- When easily moving items such as loose sheets of paper or mirror decoration items (e.g. air-fresheners) are left in the vehicle.
- If a mobile telephone that is left in the vehicle vibrates.

 A permanent disabling of the vehicle interior monitoring is not possible.

 When upon enabling the anti-theft alarm the doors or the boot lid are still open, only the anti-theft alarm will be enabled. Only after the closing of the doors and of the boot lid the vehicle interior monitoring is also enabled.

Boot lid

Introduction

The boot lid is locked and unlocked together with the doors.

WARNING

- Incorrect and unsupervised unlocking, opening or closing of the boot lid can cause accidents and severe injuries.
- The boot lid must only be opened or closed after ensuring there is nothing or no one is in its path.
 - Under no circumstances is the rear lid to be closed with the hand on the rear window. The rear window may splitter and cause injuries.
 - After closing the boot lid, check to make sure that it is closed and locked correctly so that it does not open while the vehicle is in motion. The closed boot lid must be flush with the body panels.
 - Always keep the boot lid closed while the vehicle is in motion so that no toxic exhaust fumes enter the vehicle's interior.
 - Never open the boot lid when there is a load secured to it such as bikes. An open boot lid may lower due to additional weight. If necessary, support the boot lid or remove the additional load.
 - Close and lock the boot lid and all vehicle doors when the vehicle is not in use. Ensure that no one remains in the vehicle.
 - Never leave children playing unattended in or around the vehicle, especially when the boot lid is open. Children could climb into the luggage compartment and shut the boot lid, trapping themselves inside. Depending on the time of year, locked vehicles can be subjected to extremely high or low temperatures. This can cause serious injuries and illnesses or fatalities, particularly for small children.
 - Never leave unattended children or people with special needs in the vehicle. All doors can be locked from the inside using the central locking button. This may mean that peo-

ple lock themselves in the vehicle. Persons locked in the vehicle may be exposed to extremely high or low temperatures.

NOTICE

Before opening the boot lid, check whether there is sufficient space to open and close the boot lid (e.g. when parked in garages).

NOTICE

Never use the rear window wiper or the rear spoiler to secure loads or to hold on to. This may result in damages and may rip off the wiper or spoiler.

Opening and closing the boot lid

Please refer to **WARNING** and **NOTICE** at the start of the chapter on page 65.

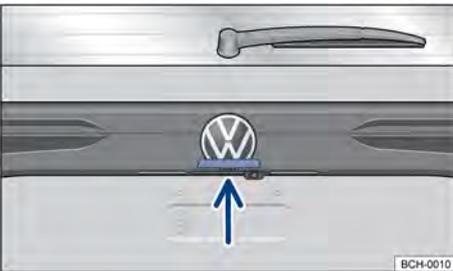


Fig. 56 On the boot lid: button to open the boot lid.



Fig. 57 Open boot lid: recesses (arrows) to pull and close.

If, for instance a bicycle is installed on the boot lid luggage holder the boot lid cannot be opened → **▲**. Always remove items attached to the luggage holder before opening the boot lid and support the open boot lid.

Opening the boot lid

- To unlock the boot lid press the vehicle key  button.
- **OR:** depending on vehicle version and radio version, touch the radio selection button  and press and hold the function button  for a few seconds.
- To open the boot lid press the button → Fig. 56 and lift the boot lid.

Closing the boot lid

- Pull the boot lid down by the recess in the interior lining → Fig. 57 with vigour so that it engages the lock → **▲**.

When the doors are locked the boot lid is also locked.

An icon on the instrument cluster display → page 19 indicates when the boot lid is not properly shut.

The boot lid is automatically locked when the vehicle is moving.

▲ WARNING

Incorrect and unsupervised unlocking or opening of the boot lid can cause accidents and severe injuries.

- With a luggage holder attached over the boot lid, an unlocked boot lid is not always recognized. An unlocked boot lid might suddenly open while driving.

▲ WARNING

Incorrect and unsupervised locking of the boot lid can cause accidents and severe injuries.

- When closing the rear lid, watch your hands keeping them out of reach of the closing sweep of the rear lid.

 If the boot lid is not opened within a few minutes after its unlocking it will be automatically locked again.

Emergency boot lid unlocking

 Please refer to **▲** and **ⓘ** at the start of the chapter on page 65.

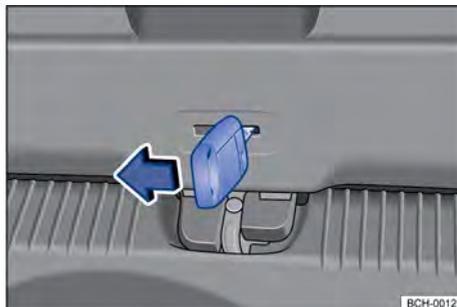


Fig. 58 In the luggage compartment: unlock the boot lid.

- Fold the rear seat backrest forwards → page 71.
- Remove luggage items in order to reach the boot lid from the vehicle interior.
- Unfold the vehicle key bit → page 56.
- Insert the key blade into the opening in the boot lid → Fig. 58 and move the release lever in the direction indicated by the arrow. 

Troubleshooting

 Please refer to **▲** and **ⓘ** at the start of the chapter on page 65.

The boot lid cannot be opened or closed

Check if something is blocking the boot lid. It must be possible to move the boot lid by hand. This may require additional force. 

Windows

Open or close windows

The buttons are located on the doors → page 8.



Opening the window: press the button.



Closing the window: pull the button.

Press to disable the rear door electric windows operating buttons.

The windows can still be operated using the door buttons for a brief period after the ignition has been switched off, provided the driver or front passenger door is not opened.

Depending on the vehicle version and equipment items, the convenience opening/closing and automatic closing features may not be available, vary in functions, or only be partially available.

One-touch opening and closing

The one-touch opening and closing function makes it possible to fully open and close the windows with a single touch. With this function it is not required to hold the Individual button pressed while fully opening or closing the window.

One-touch closing: pull the respective window button upwards to its second stage.

One-touch opening: press the respective window button downward to its second stage.

Interrupting the one-touch action: press or pull the respective window operating button once again.

Convenience opening and closing

Depending on the vehicle version, windows can be opened and closed from the outside using the vehicle key with the ignition off:

- Press and hold unlock button  or lock button  on the vehicle key. **OR** insert the vehicle key into the driver's door lock cylinder and keep it turned **counterclockwise**. All electric windows are opened or closed.
- *Locking vehicles with Keyless Access unlocking and starting system:* keep a finger for a few seconds on the door handle locking sensor surface → page 58 until the windows are shut.
- To halt the functions, release the lock or unlock button **OR** let go off the door handle and remove finger from the sensor surface.

For this a valid vehicle key must be in the area of approach. Once all windows are shut the turn indicator lamps will flash *once*, in confirmation.

*Depending on the vehicle and radio version, window control settings can be set in the radio system with the button  **OR** function button  and function button  → page 26.*

WARNING

Improper or careless use of the electric windows may cause severe injuries.

- Electric windows must only be opened or closed when you are sure that nobody and nothing is in their operating area.
- Never leave children or people who require special assistance unsupervised in the vehicle when the vehicle is locked.
- Always take all vehicle keys with you every time you leave the vehicle. After switching the ignition off and while the driver or front passenger door is not opened, the windows can still be operated for a brief period using the door buttons.
- When transporting children on the rear seats, always disable the rear electric windows using the safety button so they cannot be operated.

NOTICE

Rain water can enter the vehicle interior and damage the vehicle.

 The one-touch and roll-back functions will not work if there is a fault in the electric windows. Visit a Volkswagen Dealership or qualified workshop. 

Roll-back function for the electric windows

The roll-back function for the electric windows can reduce the risk of injuries when the windows are closing.

When the one-touch closing operation of a window encounters a difficulty of movement because it is stiff or obstructed, the window will automatically open again →  

- Check to see why the window has not closed.
- Try to close the window again.
- After a few repeated activations of the roll-back function, the automatic window closing feature may be disabled.

Closing the window without the roll-back function

- Try to close the window again within a few seconds by holding the button. **The roll-back function will be disabled!**
- If the closing procedure takes longer than a few seconds, the roll-back function enabled again. The window stops in case of difficulty to move on and opens again automatically.

Please refer to a Volkswagen Dealership or qualified workshop if the window still cannot be closed.

- Pull the respective window button upwards and keep it there for a few seconds.
- Release the button, then pull it up again and hold it in this position (till when, please?). The One-touch function is up and running again for use.

It is possible to reenable the One-touch function for the windows individually or for several of them simultaneously. ◀

WARNING

Closing the electric windows without the roll-back function can lead to severe injuries.

- Always pay attention when closing electric windows.
- Ensure that nobody obstructs the path of the electric windows, especially if the roll-back function is not active.
- The roll-back function does not prevent fingers or other body parts from being pressed against the window frame, resulting in injuries.

 The roll-back function is also activated if the windows are closed using the remote control or mechanical vehicle keys for convenience closing → page 67. ◀

Troubleshooting

Restoring the one-touch opening and closing function

When the battery is disconnected or low with the windows not completely shut or, after some roll back operations, the One touch function will be disabled and needs to be reenabled:

- Switch on the ignition.
- Shut all windows and doors.

Steering wheel

Adjusting the steering wheel position

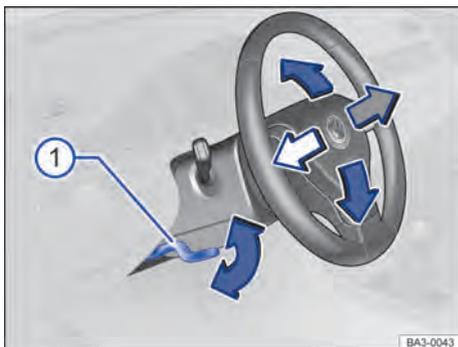


Fig. 59 Below and to the left of the steering wheel next to the steering column trim: steering wheel position adjustment lever.

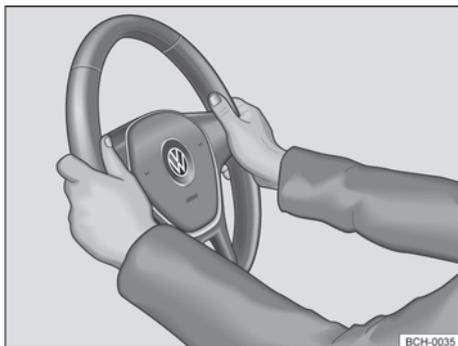


Fig. 60 On the steering wheel: 9 o'clock and 3 o'clock positions.

Adjust the steering wheel position **before** driving and only while the vehicle is stationary → ▲.

- Push the lever down, holding it by the handle → Fig. 59 ①.
- Adjust the proper distance between the driver and the steering wheel → page 29 using the driver seat controls → page 70.

- Adjust the steering wheel position in order to be able to hold it by its outer rim *in 9 o'clock and 3 o'clock positions* → Fig. 60 with both hands and slightly flexed arms.
- Firmly hold the lever by the handle and push it upwards until the steering wheel is locked in place → ▲.

⚠ WARNING

- Always firmly push the lever ① upwards by the handle after adjusting, to secure the steering wheel in place.
- Never adjust the steering wheel when the vehicle is in motion. If you require adjusting the steering wheel while driving, safely park the vehicle before adjusting the steering wheel.
- Failure to follow these precautions may compromise the driver's ability to turn the steering wheel while driving.
- To maximize airbag efficiency in case of an accident, the steering wheel must be positioned facing the chest area (and not the face).
- While driving, always keep both hands on the rim of the steering wheel, at the *at the 9 o'clock and 3 o'clock positions* → Fig. 60, to reduce the risk of injury in case the driver front airbag is deployed.
- Never hold the steering wheel in the 12 o'clock position or other positions in which the arms are located over the airbag, since this may result in arm and hand injuries in case the airbag is deployed.
- Failure to observe the above instructions have a direct negative influence on the drivers protection in case of a frontal collision of the vehicle.

Seats and head restraints

Front seat

Introduction

Front seat adjustment options are detailed below. Always ensure the seat is secured in position → page 28.

⚠ WARNING

Always adjust the seat and head restraints before driving.

- Push the front passenger seat as far back as possible.
- Adjust the driver seat in such a way that there is at least 25 cm between your breastbone and the hub of the steering wheel. Adjust the driver seat longitudinally in order for pedals to be fully pressed with slightly bent legs, and ensuring a minimum distance between the driver's knees and the dash panel of 10 cm. If your physical build makes it impossible to fulfil this requirement, contact a Volkswagen Dealership in order to implement any necessary modifications.
- Never travel with the backrest tilted far back. The further back the backrest is tilted, the greater the risk of injury caused by incorrect seat belt routing or an incorrect sitting position.
- Never travel with the backrest tilted forwards. When an airbag is triggered it could force the seat backrest backwards and injure vehicle occupants on the back seats.
- Adopt and maintain the greatest possible distance to the steering wheel and dash panel.
- You should always sit upright with your back against the seat backrest with the front seats properly adjusted. Do not position any body part too close where the airbags are fitted.
- The risk of serious injury is increased for passengers on the rear seat if they are not sitting upright because the seat belts are incorrectly positioned.

⚠ WARNING

Incorrect seat adjustment may cause accidents and severe injuries.

- The seats may only be adjusted when the vehicle is stationary, since the seat could otherwise change position unexpectedly while the vehicle is in motion, leading to a loss of vehicle control. Additionally, an incorrect seating position is adopted while adjusting the seat.
- Only adjust the height and tilt of the front seats when the area around the seat is clear.
- The area for adjustment of the front seats may not be restricted by any items.

Manual front seat adjustment

📖 Please refer to ⚠ at the start of the chapter on page 70.



Fig. 61 On the front seat: controls.

All the possible controls are described below. ▶

Adjusting the seat position

Key for → Fig. 61:

- ① Action the lever and adjust the backrest rake to the desired position. Release the lever to secure the seat backrest in place.
- ② *Only the driver seat*, move the lever several times up or down to adjust the seat height.
- ③ Pull the lever to move the front seat front or backward. The front seat must be locked in place after releasing the lever.

Rear seats

Introduction

The adjustment options for the rear seat are described below. Ensure that the seat position is properly adjusted → page 28.

Rear seat bench

The rear seat bench has clamping sleeves that secure the seat in place. The clamping sleeves may be damaged if the seat is disassembled, in which case they must be replaced.

Volkswagen does not recommend disassembling the seat bench or replacing the clamping sleeves without assistance. Contact a Volkswagen Dealership for more information.

⚠ WARNING

Improperly secured rear seat benches may cause severe injuries.

- Ensure the seat belt is not caught or damaged in the rear seat bench.
- No passengers of any age must be transported in the rear seat bench if it is not secured in place.

⚠ WARNING

An incorrect rear seat adjustment may cause accidents and severe injuries.

- Adjust the rear seat only with the vehicle at standstill, as to the contrary, the rear seat may move unexpectedly while driving. Additionally, an incorrect seating position is adopted while adjusting the seat.

- Adjust the rear seat only when there is no one in the adjustment area of the rear seat.

ⓘ NOTICE

With the rear seat folded objects may enter the space between the seat and the luggage compartment floor. Prior pushing the rear seat backwards, remove possible objects from the intermediary space.

Folding the rear seat backrest forward or backwards

📖 Please refer to ⚠ and ⓘ at the start of the chapter on page 71.

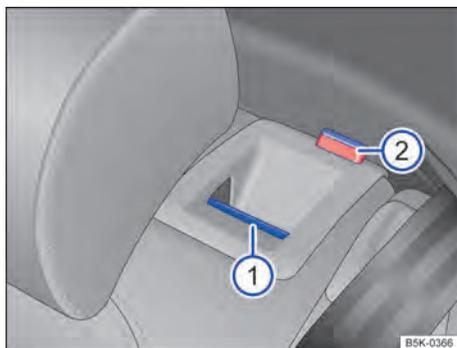


Fig. 62 On the rear seat backrest: unlocking button.

The rear seat back rest is split. Each rear seat backrest section can be folded forward individually to increase the luggage compartment.

Folding the rear seat backrest forwards

- Push the head rest all the way down → page 72.
- Pull the release button → Fig. 62 ① forward and simultaneously fold the rear seat backrest forward.
- The respective section of the rear seat backrest will be released when the red marker → Fig. 62 ② pops up.

Folding the rear seat backrest backwards

- Fold the rear seat backrest backwards and firmly press it until it clicks securely in place → .
- The rear seat backrest must always be securely engaged in order to ensure proper protection of the rear seat belts.
- The red marker → Fig. 62  must no longer be visible.

WARNING

Injuries can be caused if the rear backrests are folded forwards and backwards carelessly.

- When folding the rear seat backrest forwards, always ensure that there is no one in the rear seat backrest area.
- Never fold the rear seat backrest forwards or backwards while the vehicle is in motion.
- Ensure that the seat belt is not trapped or damaged when folding back the rear seat backrest.
- Always keep hands, fingers, feet or other body parts away from the seat area when folding the rear seat backrest forwards and backwards.
- The rear seat backrest must always be securely engaged in order to ensure proper protection of the rear seat belts. This applies especially to the centre seat of the rear seat. If a seat is occupied and the respective rear seat backrest has not clicked securely into place, the seat occupant and rear seat backrest may move forward in the event of a sudden braking or driving manoeuvre or during accidents.
- The red marking  indicates that the backrest section is not docked. Always check whether the red marking is visible while the rear seat back rest is in upright position.
- If the rear seat backrest is tilted forward or is not securely locked in place, people or children of any age cannot be transported in such seat.

NOTICE

Folding the rear seat backrest back and forth in an uncontrolled or careless fashion may result in damages to the vehicle and other objects.

- Before folding the rear seat backrest forward, adjust the front seats in order to ensure that the rear seat upholstery or head restraint do not come into contact with the front seats.
- Always prior folding the rear seat backrest forward, ensure that there are no objects in the rear seat backrest area.

NOTICE

- On the centre rear seatbelt there is a latch plate height adjuster. When folding the rear seat backrest, the latch plate height adjuster and the latch plate may eventually slip underneath the seat. Should this happen, slide them back to a ready for use position.
- Keep the height adjuster always in a position favouring the handling of the latch plate and such that prevents it from making noise while driving. 

Head restraints

Introduction

The headrest adjustment and extension possibilities are described below. Ensure correct posture is adjusted → page 28.

All seats are equipped with head rests. The centre rear head restraint is designed solely for use with the centre rear seat. For this reason do not install the head restraint in other positions.

Correct head rest setting

Adjust the head rest so that its top edge is at the same height as the top of the head – but not lower than eye level. Position the back of your head as close to the head restraint as possible.

Head restraint setting for shorter people

Push the head restraint all the way down, even if the head is then located underneath the top edge of the head rest. There may be a small gap between the head rest and backrest in the lowest position.

Head restraint setting for taller people

Push the head restraint up as far as possible. 

⚠ WARNING

Driving without head restraints or with incorrectly adjusted head restraints increases the risk of severe or fatal injuries in the event of an accident or sudden driving or braking manoeuvre.

- If a seat is occupied, the head restraint for that seat must be fitted and adjusted properly.
- Each vehicle occupant must adjust the head restraint to suit their body size, to help reduce the risk of neck injuries in case of accidents. At the same time, the top edge of the head restraint must be level with the top of the head, but no lower than eye level. Position the back of your head as close to the head restraint as possible.
- Never adjust the head restraint when the vehicle is in motion.

ⓘ NOTICE

When removing or fitting head restraints, make sure that they do not hit the roof or front seat backrest. Otherwise, the roof and other vehicle parts could otherwise be damaged.

Adjusting the head rests

📖 Please refer to ⚠ and ⓘ at the start of the chapter on page 73.

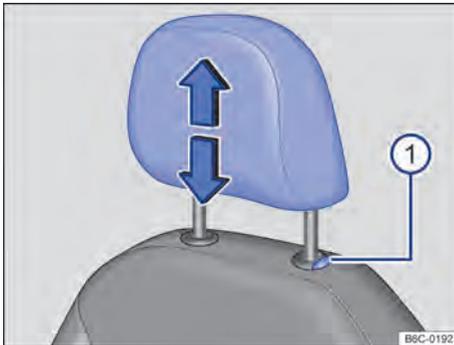


Fig. 63 Front seat head restraint: adjust.

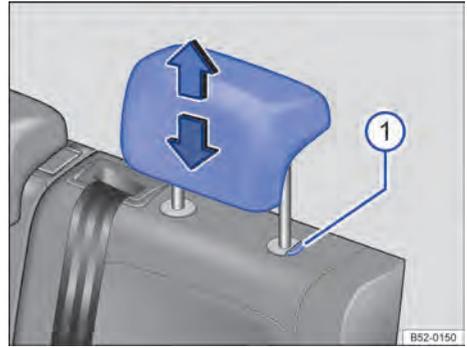


Fig. 64 Rear seat head restraints: adjust.

Adjusting the head rest height

- Move the head restraint up- or downward as indicated by the arrows, with the → Fig. 63 ⓘ or → Fig. 64 ⓘ button pressed → ⚠ in Introduction on page 73.
- The head restraint must click securely into position.

Fitting and removing headrests

📖 Please refer to ⚠ and ⓘ at the start of the chapter on page 73.

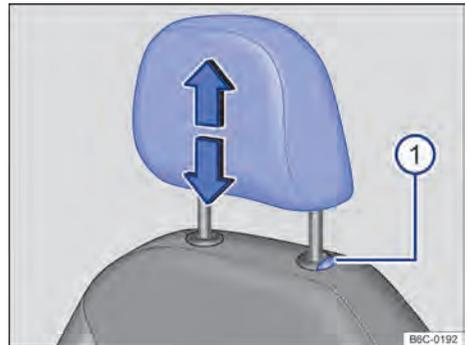


Fig. 65 Front seat head restraint: removal.

Seat functions

Centre arm rest



Fig. 67 Front centre arm rest.

Depending on the vehicle version, the centre armrest may not be available.

Front centre arm rest

To *raise*, pull the centre armrest gradually upward in the direction indicated by the arrow → Fig. 67.

To *lower*, pull the centre armrest downward.

⚠ WARNING

The front centre armrest may restrict the driver's liberty of arm movement and lead to severe accidents and injuries.

- Always keep the centre armrest stowage area closed while driving.
- Never ever transport a person or a child of any age on the centre armrest. Needless to say that it is forbidden to do so.

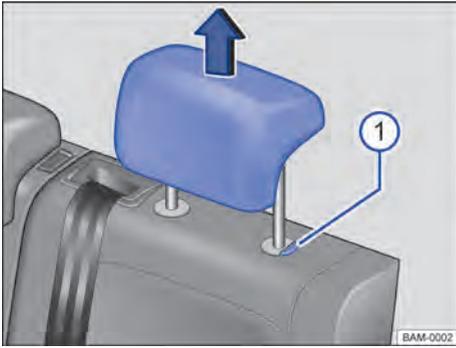


Fig. 66 Rear seat head restraint: removal

Removing the front head rest

- Push the head rest all the way up → ⚠ in *Introduction* on page 73.
- Press and hold → Fig. 65 ① to remove the head rest.

Fitting the front head rest

- Position the head rest correctly over the head rest guides and then insert into the guides of the corresponding seat backrest.
- Push the head restraint fully downward while holding the → Fig. 65 ① button pressed.
- Adjust the head restraints so that a correct sitting position can be assumed.

Removing the rear head rest

- If needed, adjust the seat backrest so that the head restraint may be removed.
- Push the head rest all the way up → ⚠ in *Introduction* on page 73.
- Press and hold → Fig. 66 ① to remove the head rest.

Fitting the rear head rest

- Release the rear seat backrest and fold it a bit forward → page 71.
- Position the head rest correctly over the head rest guides and then insert into the guides of the corresponding seat backrest.
- Press and hold → Fig. 66 ① to push the head rest downwards.
- Push back the rear seat backrest and allow to engage securely.
- Adjust the head rest so that a correct sitting position can be assumed → page 73.

Lights

Turn signals

Turn signals on /off

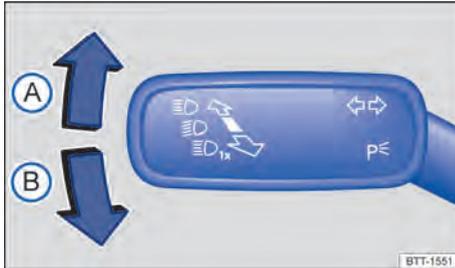


Fig. 68 On the left on the steering column: turn signal and main beam lever.

- Switch on the ignition.
- Move the turn signal and main beam lever from the centre position to the following position:

- (A) Right turn signal ➔.
- (B) Left turn signal ➜.

- Place the turn signal and main beam lever into its basic position to switch the turn indicators off.

If the sound signal does not sound with the turn indicator turned on, visit your Volkswagen dealership or specialized workshop to have the vehicle checked.

Intermittent convenience signals

To enable the convenience turn signal, move the turn signal and main beam lever up or down just to the point of resistance and release it. The turn signals flash three times.

To interrupt the convenience turn signal before time out, move the lever immediately in the contrary direction until the point of resistance and release it.

Depending on the vehicle and radio version, convenience turn signals can be enabled or disabled in the radio system with the button **CAR** OR function button **☒** and function button **Car**.

⚠ WARNING

Misuse or lack of use of turn signals, as well as forgetting to switch them on when appropriate, may confuse other road users. This could lead to accidents and severe injuries.

- Changing lanes, overtaking and conversion manoeuvres must always be indicated appropriately by using the turn signals.
- Turn off turn signals after changing lanes or completing overtaking and conversion manoeuvres.

i The hazard warning lights also work when the ignition is switched off → page 53.

Driving lights

Lights, switching on and off



Fig. 69 Next to the steering wheel: light switch (one variant).

Observe any country-specific regulations when using vehicle lighting.

Depending on the vehicle version, the foglight may not be available.

Depending on the vehicle version, the **AUTO** function may not be available.

Turning the lights on

- Switch on the ignition.
- Turn the light switch to the corresponding position:

AUTO Automatic activation of the driving lights: the driving lights are automatically turned on and off according to the brightness and weather condition → , → page 76.

 Side lights switched on. The icon on the light switch shines in green colour.

 Dipped beam headlights switched off.

Turning the lights off

- Switch off the ignition.
- Turn the light switch to the corresponding position:

0 The lights are off.

AUTO The “Leaving home” function (orientation lighting) may be on → page 77.

 Side lights switched on. The icon on the light switch shines in green colour.

 Dipped beam off - while the vehicle key is inserted in the ignition or, on vehicles with Keyless Access the driver door is closed, the side lights stay on.

Daytime running lights

The daytime running lights, according to the vehicle configuration, may increase the visibility of your vehicle in urban traffic during daytime.

The daytime running light turns on every time the ignition is turned on, when the light switch is switched to **0** or **AUTO** (with brightness detection).

The daytime running lights cannot be switched on or off manually.

WARNING

Severe injuries and accidents may occur if the road is not adequately illuminated and if the vehicle or pedestrians are not visible.

- Assist lighting systems are merely ancillary. The driver is responsible for controlling proper vehicle lighting.

WARNING

The side lights are not powerful enough to illuminate the street and make your vehicle seen by other road users.

- Always switch dipped beam headlights on with low light, fog or poor visibility.

- The rear lights are not connected to the daytime running lights. A vehicle without rear lights on may not be seen by other drivers in darkness, during rainstorms or other poor visibility conditions.

WARNING

The automatic driving light control (**AUTO**) only switches the dipped beam on or off in case of lighting variations.

- Turn the dipped beam on manually in case of special weather conditions, such as fog. 

Functions of the lights

Side light

When the light switch is turned to position , both headlights with the side lights, parts of the tail lights, the registration plate light, the button lights on the centre console and on the instrument cluster turn on. Daytime running lights are activated as the ignition is turned on.

Automatic driving light control AUTO

*Depending on the vehicle version, the automatic driving light control (**AUTO**) may not be available.*

The automatic driving light control is simply an ancillary system, which may not sufficiently recognize all driving conditions.

While the automatic driving light control is activated, low beams and lamps are automatically switched if the twilight sensor detects low lighting on the exterior environment, such as when crossing a tunnel during the day, or during night time. Whenever the vehicle is in an environment with intense solar lighting, with the light switch in position **AUTO**, low beams and lamps will be automatically switched off by the electric central system. And the daytime running lights will turn on.

The twilight sensor is located next to the rain sensor → page 80.

Cornering light

Depending on the vehicle version, the cornering light may not be available.

In slow conversions or sharp curves, the cornering light is automatically switched on. The cornering light is only switched on when driving below approximately 40 km/h. 

Upon selecting the reverse gear, the cornering light may be switched on in both vehicle sides during a manoeuvre.

Acoustic warnings if lights are not switched off

When the vehicle key is removed from the ignition and the driver door is opened, acoustic warnings will be emitted under the following circumstances:

- light switch in position $\Rightarrow \Leftarrow$.

With the “Coming Home” function turned on, when the driver door is opened, no acoustic alarm is sounded to indicate that the lights are still on.

Main beam on/off

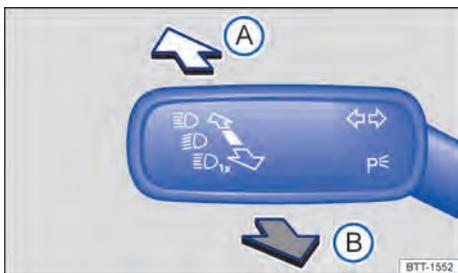


Fig. 70 On the left on the steering column: turn signal and main beam lever.

- Turn ignition and dipped beam on.
- Move the turn signal and main beam lever from the centre position to the following position:

- A** Main beam turned on.
- B** Operate the headlight flasher or turn the main beam off. The *headlight flasher* remains lit for as long as the lever is pulled.

With the main beams on or when flashing the headlights the blue indicator lamp lights up $\Rightarrow \Leftarrow$ on the dash panel insert.

! WARNING

Setting headlights too high, and the incorrect use of the main beam, could distract and dazzle other road users. This could lead to accidents and severe injuries.

- Always ensure that the headlights are adjusted correctly.
- Never use the main beam or the headlight flasher if other road users could be dazzled.

“Coming Home” and “Leaving Home” functions (orientation lighting)

With the orientation lighting, the area next to the vehicle is illuminated when leaving (“Coming Home”) and when arriving at the vehicle (“Leaving Home”). For vehicles with light and rain sensors, the “Leaving Home” function is automatically controlled.

By activating the “Coming Home” or “Leaving Home” function, the dipped beam headlight and side lights are lit up as orientation lighting.

Depending on the vehicle and radio versions, the switch-off delay may be configured in the radio system through the button **CAR** in the **Vehicle settings** menu and enabling or disabling the function **OR** by touching the selection button **+** and the **Car** function button to open the **Light settings** menu → page 26:

Turning the “Coming Home” function on

- Switch off the ignition.
- Action the headlight flasher for about one second.

The “Coming Home” lighting is turned on upon opening of the driver door. The *switch off delay time* starts with the closing of the last vehicle door or of the boot lid.

Turning the “Coming Home” function off:

- Automatically after the set lighting delay time has run out.
- **OR**: automatically when after about 30 seconds after having been turned on, a door or the boot lid of the vehicle remains open.
- **OR**: rotate the light switch to position **0**.
- **OR**: turning the ignition on.

Turning the “Leaving Home” function on:

- Unlock the vehicle when the light switch is positioned to **AUTO** and the rain and light sensor detects *darkness*.

Turning the "Leaving Home" function off

- Automatically after the set lighting delay time has run out.
- **OR:** locking the vehicle.
- **OR:** rotate the light switch to position 0.
- **OR:** turning the ignition on.

Head light range control



Fig. 71 Next to the steering wheel: control of the headlight range ①

With the headlight range control, the low beam light can be adjusted based on vehicle occupation and luggage compartment load conditions. Thereby the driver has the best possible visibility conditions without dazzling the opposite drivers.

The headlight range can be adjusted with the → Fig. 71 switch.

- Occupied front seats and empty luggage compartment.
- 1** All seats occupied and empty luggage compartment.
- 2** All seats occupied and loaded luggage compartment.
- 3** Only the driver seat occupied and fully loaded luggage compartment.

⚠ WARNING

Heavy objects in the vehicle may affect headlight visibility and distract other road users. This could lead to accidents and severe injuries.

- Always adjust the light beam to current vehicle occupation and luggage compartment load conditions, in order to avoid dazzling other road users.

Masking or switching over headlights

When driving in countries with opposite driving directions, the asymmetric dipped beam headlights may dazzle oncoming traffic. Therefore, the headlights must be masked or switched over when driving in such countries.

If applicable, mask certain areas of the headlight with thin layers or switch over the position. Additional information can be obtained from specialized companies. Volkswagen recommends using a Volkswagen Dealership or a qualified workshop for this purpose.

i The use of thin layers over the headlights is only allowed for short periods of time. Seek out a Volkswagen Dealership for a permanent switch over.

Troubleshooting

Turn signals

↔ Left or right turn signals. The indicator lamp flashes twice as fast from normal when one of the vehicle's turn lights has burned out. Check vehicle lighting.

Driving lighting

☀ Driving lights completely or partially out. Check vehicle lighting and seek assistance from a Volkswagen Dealership if necessary.

Interior lighting

Instruments and switches lighting

Depending on the vehicle and radio version, switch and instrument lighting brightness can be adjusted in the radio system with the button **CAR** OR function button **☼** and function button **Car** → page 26.

The adjusted brightness is automatically adjusted according to the ambient brightness in the vehicle.

When the light switch is turned to **AUTO**, a sensor automatically switches the dipped beams, as well as the instrument and switch lighting on and off according to the ambient brightness.

i With the light switched off and the ignition on, the instruments lighting (needles and dials) is turned on. With the decrease of the ambient brightness the lighting of the dials is automatically reduced and, if necessary, turned off completely. This function should remind the driver to turn on the dipped beams, for example, when driving through tunnels.

Interior and reading lights

Press the respective button:



Turning interior lighting on and off.



Turns off interior lights that are switched on automatically upon unlocking the vehicle, opening a door, or removing the key from the ignition cylinder.



Switches the reading lights on or off.

Glove and luggage compartment lights

Upon opening and closing the glove compartment or the boot lid, the respective lights automatically turn on or off.

i The interior and reading lights are switched off after locking the vehicle or a few minutes after the key is removed from the ignition. This prevents the battery from discharging.

i When airbags are triggered during an accident, interior lights may be automatically activated → page 41, *In case of airbag triggering - Crash detection function.*

Visibility

Window wipers and washers

Window wiper lever

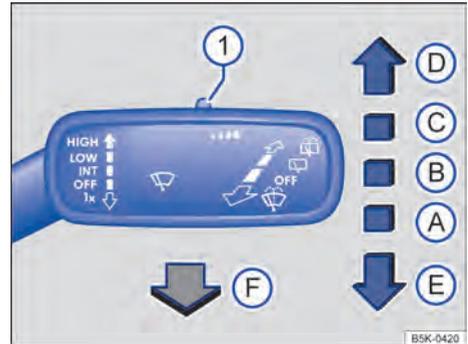


Fig. 72 To the right of the steering column: control the windscreen wipers/washers.

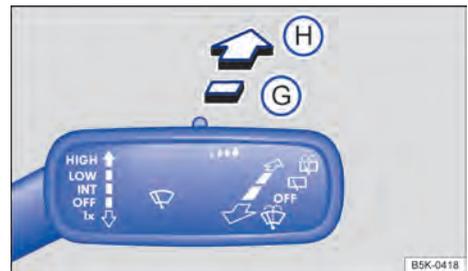


Fig. 73 To the right of the steering column: control the rear window wiper/washer.

Wipers only work with the ignition turned on, while washers also work when the ignition is off.

move the windscreen wipers lever to the desired position → **i**:

- A** **OFF** Windscreen / rear window wipers switched off.
- B** **INT** Interval wipe of the windscreen wipers or operation of the rain and brightness sensor. The windscreen wiper interval wipe operates according to the vehicle's speed. The faster the vehicle, the more frequent will be the wiping of the wipers.
- C** **LOW** Slow wipe.
- D** **HIGH** Fast wipe.
- E** **1x** touch wipe – brief cleaning.

- F The windscreen washer system is active while the lever is pulled.
- 1 ... Adjust the rain sensor sensitivity, if possible.
- G Rear window wiper system on. The rear window wiper performs a swipe at approximately every 6 seconds.
- H The rear window washer system is active while the lever is pressed.

WARNING

At low winter temperatures, the water of the windscreen washer system without sufficient antifreeze can freeze on the windscreen and limit front visibility.

- At winter temperatures, only use windscreen washing water with sufficient antifreeze.
- Never use the windscreen washer system at winter temperatures before the windscreen has been heated with the ventilation system. The antifreeze mixture may otherwise freeze on the windscreen and restrict vision.

WARNING

Worn or dirty window wiper blades reduce visibility and increase the risk of accidents and severe injuries.

- Windscreen wiper blades should therefore always be changed when they are damaged or worn.

NOTICE

If the ignition is switched off while the windscreen wipers are switched on, the windscreen wipers will resume operation from the same position after the ignition is switched back on; however, in this condition (ignition switched off while windscreen wipers were switched on), the windscreen wipers return to the default position. Ice, snow, and other obstacles on the window can damage the windscreen wipers and the windscreen wiper motor.

- Remove snow and ice from the windscreen wipers before driving.
- Carefully release the frozen window wipers from the window. Volkswagen recommends using an antifreeze spray for such activity.

NOTICE

Do not switch the windscreen wipers on when the window is dry. Dry wiping can damage the window glass.

NOTICE

In icy conditions, always check if the windscreen wiper blades are not frozen to the glass before using the windscreen wipers!

Function of the window wipers

Automatic rear window wiper operation

The rear window wiper turns on automatically when the windscreen wipers are on and reverse gear is engaged. *Depending on the vehicle and radio version*, automatic windscreen wiper engagement when selecting reverse gear can be enabled or disabled in the radio system with the button OR function button and function button → page 26.

Rain and brightness sensor

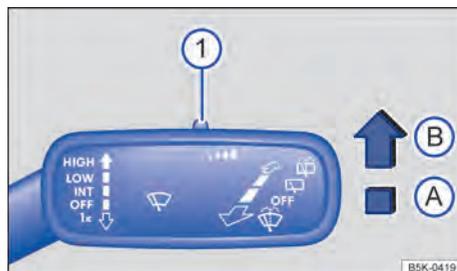


Fig. 74 To the right of the steering column: window wipers lever.

Depending on the vehicle version, the rain and brightness sensor may not be available.

The activated rain and brightness sensor automatically controls the window wiper intervals according to rain intensity.

Enabling and disabling the rain and brightness sensor

Press the lever into the required position

→ Fig. 74:

- Position **(A)** - rain sensor disabled.
- Position **(B)** - rain sensor enabled, automatic wiping if necessary.

Depending on the vehicle and radio version, automatic wipers can be enabled or disabled in the radio system with the button **(CAR)** OR function button **(W)** and function button **(Car)** → page 26.

When the automatic wiping is disabled in the radio system, the interval time is adjusted at fixed levels.

Adjusting the rain sensor sensitivity

Depending on the vehicle version, the rain sensor sensitivity setting may not be available.

The sensitivity of the rain sensor can be adjusted manually with the switch on the wiper lever → Fig. 74 **(1)** → **(A)**.

- Turn the switch to the right - high sensitivity.
- Turn the switch to the left - low sensitivity.

⚠ WARNING

The rain and brightness sensor may not sufficiently detect rain and fail to activate the window wipers.

- If necessary, manually activate window wipers whenever the rain affects visibility.

Troubleshooting

Altered behaviour of the rain and brightness sensor activation

The possible causes for damages and misinterpretations in the sensitivity surface area of the rain sensor are among others the following:

- **Damaged windscreen wiper blades:** a water film or wiping stripes due to damaged wiper blades may extend the activation period, reduce wiping intervals, or result in quick continuous wiping.
- **Insects:** the presence of insects may activate automatic wiping.
- **Salt streaks:** during winter time, salt streaks on the window may cause extremely long wiping patterns until the window is nearly dry.

- **Dirt:** dry dust, wax, glass lining (lotus effect), and detergent residues (car wash) may reduce the rain sensor's sensitivity, eventually reducing its speed or effectiveness. Regularly clean the rain sensor's sensitive surface → page 264 and regularly check the window wiper blades for damages.
- **Crack in the windscreen:** the impact of a rock will activate a wiping cycle when the rain sensor is enabled. After that, the sensor detects the reduced sensitivity surface and adjusts. According to the rock's impact area, rain sensor activation behaviour may be affected.
- **Stickers and labels:** the sensor region must not be externally or internally covered; otherwise, the automatic lighting functions and rain sensor will not operate properly.

A glass-cleaning product, such as alcohol, is recommended to remove wax and polishing residues from the windows.

⚠ Damaged windscreen wipers

Yellow indicator lamp lights up.

Windscreen wipers are not working.

- Switch the ignition off and on again.
- If necessary, go to a Volkswagen dealership or a qualified workshop.

i Wipers will attempt to remove any obstacles on the windscreen. If the obstacle continues to block the windscreen wipers movement the wipers will stop. Remove the obstacle and reactivate the wipers.

Mirrors

📖 Introduction

In order to ensure safety, the driver must properly adjust exterior and interior mirrors before driving → **(A)**.

Drivers are able to notice traffic movements behind them and adjust driving behaviours accordingly using the exterior and interior mirrors. There are some areas to the side and behind the vehicle that cannot be seen through the exterior

and interior mirrors. Such areas are called blind spots. There may be other vehicles, pedestrians and objects in blind spots.

⚠ WARNING

Adjusting exterior and interior mirrors while driving may distract the driver. This could lead to accidents and severe injuries.

- Only adjust exterior and interior mirrors while the vehicle is stationary.
- When parking, changing lanes and during overtaking or conversion manoeuvres, always observe the vehicle's surroundings, since other vehicles or objects may be located in blind spots.
- Always ensure that the mirrors are properly adjusted and that rear visibility is not limited by misting or other objects.

⚠ WARNING

Inaccurate assessment of the distance of vehicles coming from behind may cause severe accidents and injuries.

- The domed surfaces of exterior mirrors (convex) increase visibility and make objects appear smaller and more distant.
- Using the left and right-hand exterior mirrors to assess the distance of vehicles coming from behind when changing lanes is inaccurate and may cause severe accidents and injuries.
- Whenever possible, use the internal mirror to ascertain the distance of vehicles coming from behind or the distance to other objects.
- Ensure that rear visibility is always unobstructed.

⚠ WARNING

The interior mirror with automatic anti-dazzle function contains an electrolytic fluid which may leak, should the mirror glass be broken.

- The leaked electrolytic fluid may irritate the skin, eyes and breathing organs, especially of people suffering from asthma or similar diseases. Ensure the immediate entry of sufficient fresh air and leave the vehicle or, if this is not possible, open all windows and doors.
- In case of contact of the electrolytic fluid with the eyes or skin, wash immediately with plenty water for at least 15 minutes and seek medical attention.

- In case of contact of the electrolytic fluid with footwear or clothes wash them immediately with plenty water for at least 15 minutes. Carefully clean the affected clothing items prior using them again.
- In case of ingestion of the electrolytic fluid, immediately wash the mouth with plenty water for at least 15 minutes. Do not induce vomiting unless directed to do so by medical personnel. Immediately seek medical assistance.

⚠ NOTICE

The electrolytic fluid contained in automatic anti-dazzle mirrors may leak due to a broken mirror glass. This fluid damages plastic surfaces. Remove the fluid as quickly as possible, for example, with a damp sponge.

Interior mirror

📖 Please refer to ⚠ and ⚠ at the start of the chapter on page 82.

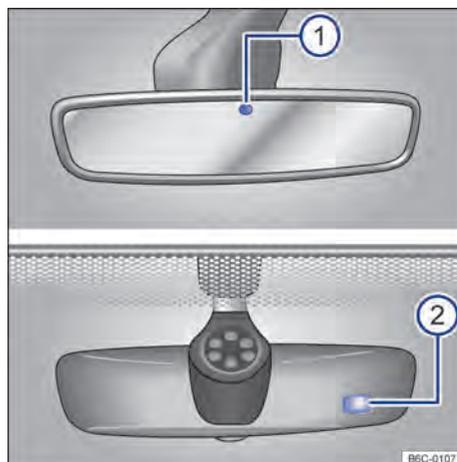


Fig. 75 On the windscreen: automatic anti-dazzle interior mirror.

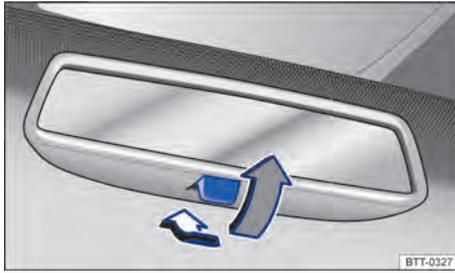


Fig. 76 On the windscreen: manual anti-dazzle interior mirror.

The driver must adjust the interior mirror so that he/she can see clearly through the rear window.

Rear visibility may be hindered or eliminated by objects placed over the luggage compartment cover, for example.

Automatic anti-dazzle interior mirror

With the ignition switched on, the sensors measure the incidence of light from behind → Fig. 75 ① and from the front ②.

Depending on the measured values, the interior mirror is *automatically* anti-dazzled.

When the light incidence detected by the sensors is compromised or interrupted, the interior mirror with automatic anti-dazzle function may malfunction. Similarly external navigation devices on the windscreen or near the automatic anti-dazzle interior mirror may negatively affect the sensors → ⚠.

In some situations the automatic anti-dazzle is disabled, for instance, when reverse gear is engaged.

Manual anti-dazzle interior mirror

- Day position: the lower mirror edge lever points towards the windscreen.
- Night position: pull the lever → Fig. 76 (grey arrow) to avoid headlight dazzle from vehicles coming from behind.

⚠ WARNING

The display light from a mobile phone or portable navigation device may compromise the proper operation of the automatic anti-dazzle interior mirror, potentially leading to severe accidents and injuries.

- A malfunctioning automatic anti-dazzle may prevent the use of the interior mirror to correctly determine the distance to the vehicle following behind or the distance to other objects.
- Never hang objects on the automatic anti-dazzle interior mirror, such objects may impair the proper operation and cause the automatic anti-dazzle to malfunction.



Visibility is hindered by using interior mirrors in the night position.

Exterior mirrors

📖 Please refer to ⚠ and ⌚ at the start of the chapter on page 82.

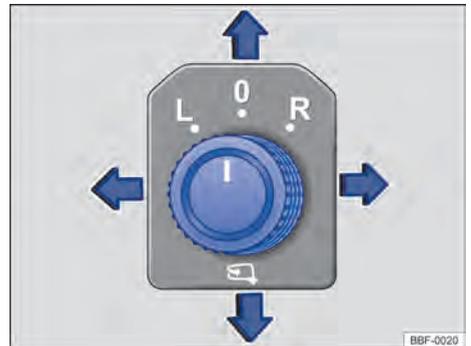


Fig. 77 On the driver door: rotary adjusting knob for the electric exterior mirrors.

Electric exterior mirrors

- Switch on the ignition.
- Rotate the rotary knob in the driver door until reaching the desired icon → Fig. 77.
- Move the rotating knob forward, backward, to the right or to the left, as indicated by the arrows, to adjust the exterior mirror.



Electrically folding exterior mirrors inwards (not available in some versions) → ⚠.

L
R
O

Adjusting the left exterior mirror.

Adjusting the right exterior mirror.

Neutral position. The exterior mirrors cannot be adjusted and all functions are disabled.

Enabling the exterior mirror functions

Depending on the vehicle and radio version, the following exterior mirror functions must be set in the radio system with the button **CAR** OR function button **☒** and function button **Car** → page 26.

- Enable on the displayed menu the respective function of the exterior mirror.

Folding exterior mirrors inward when parking

If the vehicle is locked or unlocked from the outside, the exterior mirrors will automatically fold in or out. For this the rotary knob must be in position **L**, **R** or **O**.

When the rotary button of the electrically adjustable exterior mirror is in the **☒** position, the exterior mirrors stay folded inward.

Saving the right-hand exterior mirror adjustments for reverse gear (tilt down)

- Select a valid vehicle key to which the setting is to be attributed.
- Unlock the vehicle with this vehicle key.
- Switch on the ignition.
- Selecting reverse gear.
- Adjust the right exterior mirror in order to allow proper visibility of kerb edge, for example.
- The set exterior mirror position is automatically saved and attributed to the vehicle key.

Accessing the right-hand exterior mirror adjustments for reverse gear (tilt down)

- Rotate the rotary knob for the exterior mirror to **R**.
- With the ignition turned on, engage the reverse gear. The exterior mirror takes up the saved position.

The saved reverse gear position of the right exterior mirror will be abandoned when driving forward again at a speed greater than about 15 km/h or when the rotary switch is moved from position **R** to another position.

Exterior mirrors can be manually folded (rotated) inwards and outwards. The use position is defined by a clear locking position in both sides (left and right).

⚠ WARNING

Careless folding of exterior mirrors may cause injuries.

- Make sure there are no obstacles in the operating area when folding exterior mirrors in or out.
- Handle with care in order to prevent fingers from getting stuck between the exterior mirror and the mirror frame, while the mirror is moving.

! NOTICE

Always fold in exterior mirrors in automatic washing systems.

- Do not fold electric exterior mirrors in or out, since this could damage the electrical system.

i In case of failure, electric exterior mirrors may be manually adjusted by pressing the edge of the mirror surface.



Sliding headliner

Sun visor

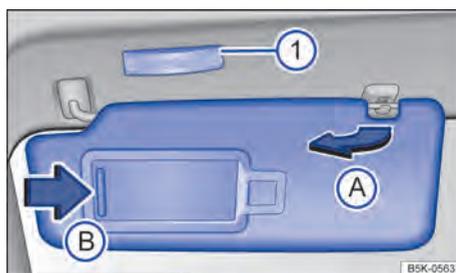


Fig. 78 Sun visor.

Depending on the vehicle version, the sun visor may contain different combinations, containing or not: lighting, mirror cover and vanity mirror.

Various positions for the driver and front passenger sun visors:

- Folding the sun visor down to the windscreen.
- Carefully remove the sun visor from the support, holding the support base, and swivel towards the door → Fig. 78 **A**.



⚠ WARNING

Exterior mirrors should only be adjusted when the vehicle is stationary, in order to prevent the driver from being distracted.

Vanity mirrors

A vanity mirror is located behind a cover on the folded down sun visor. When opening the cover → Fig. 78 (B) a lamp lights up (1).

The lamp will go out when the vanity mirror cover is pushed back or the sun visor is folded back up.

WARNING

Sun visors folded downwards may reduce the field of vision and decrease safety.

- Sun visors and sunblind should always be replaced in their holder if they are not being used.

NOTICE

Handle sun visors and vanity mirror covers carefully in order to avoid damages.

Heating and air conditioning

Heating, ventilating, cooling

Introduction

The following equipment may be installed in the vehicle:

The **ventilation and heating system** heats and ventilates the vehicle interior. The ventilation and heating system does not cool.

The **air-conditioner** or **Climatronic** cool and dehumidify the air. They work best when all windows are closed. In case of accumulated heat in the vehicle interior, ventilation may speed the cooling process.

Some functions and buttons are version dependent and depend on the type of system fitted.

Indication of active functions

The lighted LEDs on controls and buttons indicate that a function is active.

WARNING

Poor visibility through all windows increases the risk of collisions and accidents, which can lead to severe injuries.

- Always ensure that all windows are free of ice, snow and mist in order to have good visibility.
- Maximum heat output, which is needed to defrost the windows as quickly as possible, is only available when the engine has reached its operating temperature. Do not start your journey until you have good visibility.
- Always ensure that the heating and fresh air system or air conditioning and rear window heating system are used properly in order to guarantee proper exterior visibility.
- Never use the air recirculation mode for extended periods. If the cooling system is switched off, the windows can mist up very quickly in air recirculation mode and reduce visibility considerably.
- Always switch off the air recirculation mode if it is not required.

⚠ WARNING

Stale air can cause tiredness and lack of concentration in the driver, which in turn can cause collisions, accidents and severe injuries.

- Never leave the blower off for extended periods and never use the recirculation mode for extended periods, since this prevents fresh air from entering the vehicle.

ⓘ NOTICE

Do not place food, medicines or other temperature sensitive object in front of the vents. Food, medicines or other heat or cold sensitive objects may be damaged or rendered unusable by the air outflow.

ⓘ NOTICE

- Switch off the air conditioning system if you suspect that it has been damaged. This can help to prevent further damage. The air conditioning system must be checked by a Volkswagen Dealership or qualified workshop.
- Repairs to the air conditioning system require specific knowledge and tools. Volkswagen recommends using a Volkswagen Dealership for this purpose.

Air conditioning controls - analogue

📖 Please refer to ⚠ and ⓘ at the start of the chapter on page 85.

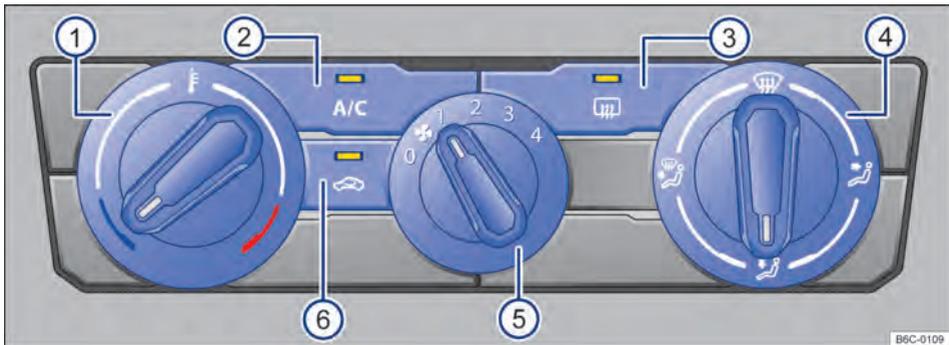


Fig. 79 Air conditioning controls.

Turning off

- Turn the blower regulator to stage 0 → Fig. 79 (5).

A/C – Cooling mode

- Press the **A/C** → Fig. 79 (2) button to turn the cooling on and off.

In cooling mode the air is dehumidified.

■ / ■ – Temperature

- Turn the left rotary regulator → Fig. 79 (1).

☪ – Blower

- Turn the blower regulator → Fig. 79 (5).

🌀 – Air recirculation mode

In air recirculation mode, no fresh air enters the interior of the vehicle → page 90.

- Press the  → Fig. 79 (3) button.

Air distribution

- Turn the right rotary regulator → Fig. 79 (4) to the desired position.

 – Air distribution to the upper body part with the chest vents in the dash panel.

 – Distribution of air to the footwell. ▶

 – Air distribution to the windscreen and the footwell area.

 *Air conditioning* – Air distribution to the windscreen.

– Defrost function

The defrosting function eliminates the frost from the windscreen.

- Turn the right rotary regulator to position  → Fig. 79 (4).

Under the defrosting function the air circulation mode is disabled and the air conditioner compressor is turned on to remove the humidity from the air. With the defrost function enabled, the air circulation mode cannot be turned on and the air conditioner compressor cannot be turned off.

– Rear window defrost function

To turn the rear window heating on and off with the engine running.

- Press the  → Fig. 79 (3) button.

The rear window defroster is turned on automatically after about 10 minutes.

Recommended air conditioner settings

- Switch the air recirculation mode off.
- Adjust the blower to level 1 or 2.
- Put the temperature adjuster in the middle position.
- Open and align all the vents of the dashboard.
- Set the air distribution controller to the desired position.
- Press the  button on the panel to switch the cooling system on.

Fast cooling inside the vehicle

In order to obtain fast cooling inside the vehicle, follow the instructions below:

- Rotate the temperature regulator completely to the left.
- Set the air distribution to the position .
- Turn the blower regulator to its maximum level. The air conditioner and air recirculation mode are automatically turned on.
- Case the air conditioner does not turn on, press the  button to switch the cooling system on.
- If the vehicle is exposed to the sun for extended periods, open the front door windows partially or completely for a brief amount of time (1 to 3 minutes), in order to remove the hot air mass inside the vehicle.
- Close the windows and, if necessary, press the  button to turn the air recirculation mode on.

NOTICE

To prevent damages to the rear window defroster, no sticker should be stuck on the inside on the filaments.

 After the window is cleared, the function must be switched off. Lower current consumption also decreases fuel consumption.

 If the air conditioner and air recirculation mode are turned off manually, the system will not automatically turn them on next time the blower is switched off and on again. The system will only start working automatically again after the temperature switch is removed from the full left position and placed back into this position. <

Climatronic controls

📖 Please refer to ⚠ and ⓘ at the start of the chapter on page 85.

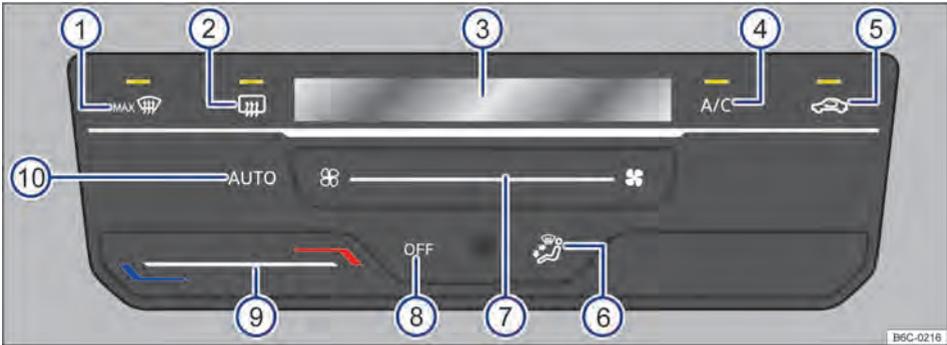


Fig. 80 Climatronic controls (variant 1).

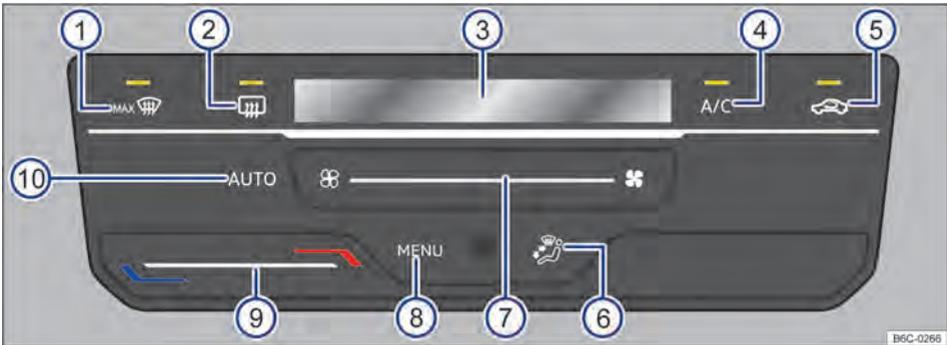


Fig. 81 Climatronic controls (variant 2)

Some functions are version dependent and depend on the type of system fitted.

Turning off

- Touch the function button **OFF** / → Fig. 80 ⑧
- **OR** Slide your finger to the left under the function surface → Fig. 81 ⑦, then press the left-most button.

AUTO – Automatic mode

When touching the function button **AUTO** → Fig. 80 ⑩ it is possible to switch on the Climatronic automatic mode.

The automatic mode ensures constant temperatures in the vehicle interior. The air temperature, the air volume and its distribution is automatically regulated. Automatic operation turns off when ventilation is changed manually → Fig. 80 or

→ Fig. 81 ⑦ or by changing the air distribution across the function button → Fig. 80 or → Fig. 81 ⑥.

A/C – Cooling mode

- Touch the function button **A/C** → Fig. 80 or → Fig. 81 ④ to turn on and off the cooling functioning.

In cooling mode the air is dehumidified.

■ / ■ – Temperature

- Slide your finger under the function button → Fig. 80 or → Fig. 81 ⑨.

On the Climatronic display → Fig. 80 or → Fig. 81 ③ the set temperature is displayed. ▶

– Blower

- Slide your finger under the function button → Fig. 80 → Fig. 81 (7).

– Air recirculation mode

In air recirculation mode, no fresh air enters the interior of the vehicle → page 90.

- Touch the function button  → Fig. 80 or → Fig. 81 (5).

Air distribution

- Touch the function button → Fig. 80 or → Fig. 81 (6) on the desired position, the selected distribution will be indicated on the display (3).

 – Distribution to the upper body part and footwell.

 – Air distribution to the windscreen.

MAX – Defrost function

The defrosting function eliminates the frost from the windscreen.

- Touch the function button  → Fig. 80 or → Fig. 81 (1).

Under the defrost function, the air is dehumidified and the blower is set to a high level.

– Rear window defrost function

To turn the rear window heating on and off with the engine running.

- Touch the function button  → Fig. 80 or → Fig. 81 (2).

The rear window defroster is turned off automatically after about 10 minutes.

Climatronic recommended settings

- Touch the function button .
- Set the temperature to +22 °C.
- Open and align the dash panel vents.

Fast cooling inside the vehicle

In order to obtain fast cooling inside the vehicle, follow the instructions below:

- Turn the temperature regulator or touch the function button fully to the left.
- Set the air distribution to the position .

- Turn regulator or touch fan function button to maximum level. The air conditioner and air recirculation mode are automatically turned on.
- Case the air conditioner does not turn on, press the  key or touch the function button to switch the cooling system on.
- If the vehicle is exposed to the sun for extended periods, open the front door windows partially or completely for a brief amount of time (1 to 3 minutes), in order to remove the hot air mass inside the vehicle.
- Close the windows and, if necessary, press the  key or touch the function button to turn the air recirculation mode on.

Air conditioning menu in VW Play

Depending on the vehicle version, the air conditioning menu in VW Play may not be available.

For vehicles with VW Play, press **MENU** → Fig. 81 (8) to open the air conditioning menu on the radio.

The air conditioning menu on the VW Play display is only available in Climatronic.

In the air conditioning menu you will find, for example, the temperature adjustment → page 88 and air distribution functions → page 89.

The top part of the screen shows the current air conditioning settings, for example, the automatic mode air conditioning profile.

The bottom part of the screen shows function areas for frequently used air conditioning functions.

Air conditioning operating states

The air conditioning operating states are displayed in colour:

-  Cool down.
-  Warm.

NOTICE

To prevent damages to the rear window defroster, no sticker should be stuck on the inside of the filaments.

 After the window is cleared, the function must be switched off. Lower current consumption also decreases fuel consumption.

 If the air conditioner and air recirculation mode are turned off manually, the system will not automatically turn them on next time the ►

blower is switched off and on again. The system will only start working automatically again after the temperature switch is removed from the full left position and placed back into this position. ◀

Air recirculation mode

📖 Please refer to ⚠ and ⚠ at the start of the chapter on page 85.

The air recirculation mode prevents outside air from entering the vehicle.

- Press the  key or touch the function button on the dash panel to turn the air recirculation mode on or off.

When is the air recirculation mode turned off?

The air recirculation is turned off under the following situations → ⚠:

- When the Climatronic  function button is turned on.
- When the air conditioner air distribution regulator or surface button is positioned to position .

⚠ WARNING

Stale air can cause tiredness and lack of concentration in the driver, which in turn can cause collisions, accidents and severe injuries.

- Never leave the blower off for extended periods and never use the recirculation mode for extended periods, since this prevent fresh air from entering the vehicle.
- With the cooling system switched off, the windows can mist up very quickly in air recirculation mode, reducing visibility considerably.
- Always shut down the air recirculation mode when no longer necessary.

⚠ NOTICE

Do not smoke with the air recirculation mode turned on. The smoke drawn into the cooling system can leave a residue on the evaporator and the dust and pollen filter, producing a permanent unpleasant odour.

 At very high outside temperatures, it is recommended to select the recirculation mode for a short time, to cool down the interior of the vehicle faster. ◀

Troubleshooting

📖 Please refer to ⚠ and ⚠ at the start of the chapter on page 85.

The following hints and operational instructions help with the correct use of the system.

The cooling system for the vehicle interior only works when the engine is running and the blower is switched on.

The air conditioning system operates most effectively with the windows closed. However, if the vehicle has heated up after standing in the sun for some time, the air inside can be cooled more quickly by opening the windows for a short time.

Why does the cooling system turn off automatically or cannot be turned on?

- The engine is not running.
- The blower is switched off.
- The air conditioning system fuse has blown.
- Room temperature is below approximately +3 °C.
- The air conditioner compressor has been temporarily deactivated because the engine coolant temperature is too high.
- There is a fault on the vehicle. The air conditioning system must be checked by a Volkswagen Dealership or qualified workshop. ▶

Settings for optimal road visibility

- Keep the air entrance of the windscreen free of ice or leaves to increase the heating or cooling power and prevent the frosting of the windows → page 260.
- Keep the air slot of the rear area of the luggage compartment free so that the air may flow freely from the front to the back through the vehicle.
- When the engine coolant has reached its operational temperature, the highest heating power will have been reached and the fastest window defrosting.

Dust and pollen filter

The dust and pollen filter with activated charcoal reduces the level of particles in the outside air entering the vehicle.

The pollen and dust filter needs to be regularly replaced to keep the air conditioner's efficiency unimpaired. Case the vehicle is frequently used in heavily polluted environments, the filter should be replaced between servicing events → page 260.

Water vapour underneath the vehicle

If the outside humidity and temperature are high, **condensed water** may drip off the cooling system's evaporator and form a pool of water underneath the vehicle. This is normal and does not indicate a leak!



The air conditioning supercharger consumes engine power during cooling, thus contributing to increased fuel consumption. To reduce cooling time to a minimum, observe the following instructions:

- If a vehicle stationary under the sun is too hot, open the doors and windows for a few seconds in order to let the hot air out.
- Ensure that external hot air does not enter the vehicle, for example, through an open window, while the air conditioning is switched on.
- If it is possible to reach the desired temperature without switching the air conditioning on, only use the ventilation system.



When arriving at destination (about 2 minutes before), turn the air conditioner off leaving only the ventilation operating. This helps reducing the humidity in the evaporator, reducing the appearance of unpleasant odours in the interior of the vehicle.

The air conditioning compressor may momentarily shut down in some situations, such as stepping on the brakes, accelerating or manoeuvring.



Driving

Driving guidelines

Pedals

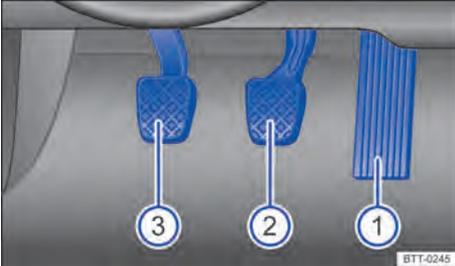


Fig. 82 In the footwell: pedals in vehicles with manual transmission.

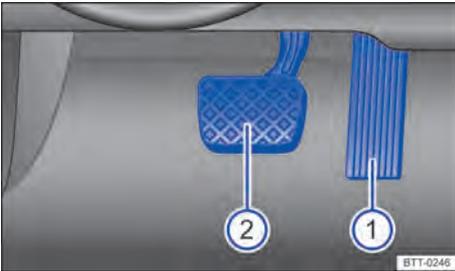


Fig. 83 In the footwell: pedals in vehicles with automatic gearbox.

Key for → Fig. 82 and → Fig. 83:

- ① Gas pedal
- ② Brake pedal
- ③ Clutch pedal, *in vehicles with a manual gearbox.*

The operation and freedom of movement of all pedals must never be impaired by objects or floor mats.

Only use floor mats that leave the pedal area free and can be securely fastened in the footwell.

! WARNING

Items in the driver footwell can hinder pedal operation. This can lead to loss of control of the vehicle and increase the risk of serious injury.

- Ensure that all pedals can always be operated without any hindrance.

- Always safely secure foot mats.
- Additional foot mats or other floor coverings should never be placed over the fitted foot mat.
- Ensure that no objects can enter the driver footwell while the vehicle is in motion.

! NOTICE

Ensure that you are able to operate the pedals freely at all times. For example, the braking distance to fully stop the vehicle will be longer if a braking circuit is faulty. The brake pedal will have to be depressed further and harder than normal. ◀

Gear change recommendation



Fig. 84 On the instrument cluster: gear change indicator.

Key for → Fig. 84:

- Ⓐ Current engaged gear.
- Ⓑ Recommended gear shift.

Depending on the vehicle version, a gear shift recommendation may be indicated on the instrument cluster display to optimize fuel savings.

In vehicles with automatic gearbox the automatic gearbox selector lever must be in the Tiptronic position → page 106.

When the ideal gear is already selected, no gear shift is recommended. The currently engaged gear is displayed.

! CAUTION

The gear-change indicator is merely a supporting system and must not distract the driver from traffic.

- The gearshift indicator merely assists the driver in increasing fuel savings. The driver is exclusively responsible for assessing whether current vehicle, road, and traffic conditions ▶

allow safely following the gearshift indicator (e.g. when overtaking or driving with fully-loaded vehicles).

 Enhanced gear selection decreases fuel consumption.

 Warning texts may vary according to the instrument cluster version.

 In vehicles with manual gearbox the gear-change indicator display turns off when the clutch pedal is actuated or, in vehicles with automatic gearbox, when leaving the Tiptronic gate. <

A car uses most fuel when accelerating. If you think ahead when driving, you will need to brake less and thus accelerate less. Wherever possible, let the car roll slowly to a stop, for instance when you can see that the next traffic lights are red.

Changing gear earlier

Basically: the highest gear is always the most economical gear. As a rule of thumb, the following applies to most vehicles: at a speed of 30 km/h (19 mph) drive in 3rd gear, at 40 km/h (25 mph) in 4th gear and at 50 km/h (31 mph) in 5th gear.

If traffic and driving scenarios are suitable, "skipping" gears when changing up a gear will also save fuel.

Do not drive gears to their upper limit. Use 1st gear only for pulling away then quickly change up to 2nd gear.

Vehicles with gearshift indicator help reduce fuel consumption by recommending ideal gears for each specific situation.

Rolling to a stop

Taking your foot off the accelerator will interrupt the supply of fuel to the engine and decrease fuel consumption.

Therefore, in situations such as approaching a red traffic light, let the vehicle roll without applying the accelerator. Only press on the clutch pedal to disengage if the vehicle becomes too slow or if the stopping distance is longer. The engine will then run at idling speed.

Switch off the engine in situations in which the vehicle might be stationary for a long time, e.g. at a level crossing.

Thinking ahead when driving, and driving with the "flow" of traffic

Frequently applying the brake and accelerator will increase fuel consumption. By thinking ahead when driving and by maintaining a sufficient distance to the vehicle in front, simply keeping your foot off the accelerator will stop the speed from fluctuating. This means that active braking and accelerating is not always necessary.

Driving smoothly and evenly

Smoothness is even more important than speed. The more evenly you drive, the lower your fuel consumption will be. ▶

Economical driving style

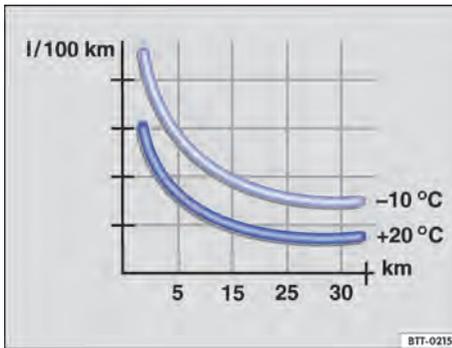


Fig. 85 Fuel consumption in litres per 100 km at two distinct ambient temperatures.

Driving correctly it is possible to reduce fuel consumption, harming the environment and engine, brake and tyre wear. Below are some tips on minimizing the environmental impact and save.

Fuel consumption, environmental impact and wear on the engine, brakes and tyres depend largely on 3 factors:

- Personal driving style.
- Conditions of use (such as weather and road surface characteristics).
- Technical conditions.

By adopting an economical driving style and anticipating the traffic situation ahead, you can easily reduce fuel consumption by 10 to 15%.

When driving on a motorway, it is much more effective to drive at a constant moderate speed than to drive with constant acceleration and braking. As a rule, driving with a constant style will get you to your destination just as quickly.

Using additional equipment in moderation

It is always important to be comfortable in your vehicle, but it is also important to consider the environment.

Some equipment will increase fuel consumption when switched on (examples):

- Air conditioning cooling system: if the air conditioning system is set to a very high or low temperature it will require a lot of energy, which is generated by the engine. Therefore the temperature setting in the vehicle should not vary too much from the outside temperature. It may be a good idea to air the vehicle before setting off and then to travel a short distance with the windows open. The air conditioning system should then be switched on once the windows have been closed.
- Keep the windows closed when driving at high speeds. Open windows increase fuel consumption.
- Switch off the rear window defrost function when the window is clear.

Other factors which increase fuel consumption (examples):

- Fault in engine management system.
- Driving in hilly regions.
- Driving with a trailer.

Avoid short journeys

Directly after a cold start, the engine has a very high fuel consumption. The engine reaches its working temperature after a few kilometres, when fuel consumption will return to a normal level.

The engine and catalytic converter need to reach their proper **working temperature** in order to minimise fuel consumption and pollutant emissions. The **outside temperature** also has a decisive influence.

The → Fig. 85 shows the variation in fuel consumption for the same journey at +20 °C and -10 °C.

Therefore, avoid making too many short journeys and car share whenever possible.

Under the same conditions, the vehicle will use more fuel in the winter than in the summer.

Not only is it illegal in some countries to “warm up” cold engines, it is also technically unnecessary and a waste of fuel.

Adjust tyre pressure

The correct tyre pressure reduces rolling resistance and therefore also fuel consumption.

When purchasing new tyres, always make sure that the tyres have optimum rolling resistance.

Using low friction engine oil

Fully synthetic low-viscosity engine oils, known as low-friction engine oils, reduce fuel consumption. Low viscosity engine oils decrease frictional resistance in the engine and spread better and more quickly, especially for cold starts. They are especially effective in vehicles which make a lot of short journeys.

Always make sure that the engine oil level is correct and that you keep to the service intervals (oil change intervals).

When purchasing engine oil, always make sure it complies with engine oil standards and has been approved by Volkswagen.

Avoid unnecessary loads

The lighter the vehicle, the more economical and environmentally-friendly it is. An extra weight of 100 kg increases fuel consumption, for example, by up to 0.3 l/100km.

Remove all unnecessary items and loads from the vehicle.

Remove any unnecessary special equipment and accessories

The more aerodynamic a vehicle, the lower its fuel consumption. Special equipment and accessories, such as roof carriers or bicycle carriers, make the vehicle less aerodynamic.

You should therefore remove any special equipment and luggage carriers that are not being used, especially if you are going to be driving at high speeds.

WARNING

Adapt your speed and distance from the vehicles ahead to suit visibility, weather, road and traffic conditions.



Information on the brakes

New brake pads cannot generate the full braking effect during the first 300 km and must first be “run in” → ⚠️. However, you can compensate for the slightly reduced braking force by applying more pressure to the brake pedal. **During the run-in period, the braking distance is longer when the brakes are depressed fully or during emergency braking** than with brakes that have been fully run in. In the run-in period, the brakes should not be depressed fully and situations should be avoided that create a heavy load on the brakes. For example, when driving too close to other vehicles.

The **rate of wear** of the brake pads depends to a great extent on use conditions and driving style. When frequently driving in city traffic and short distances or in sporty manner, the brake pad thicknesses need to be periodically checked by a Volkswagen dealership or a specialized workshop.

When driving with **wet brakes**, for example after driving through water, after heavy rainfall or after washing the vehicle, the braking effect may be delayed as the brake discs will be wet, or possibly iced up (during the winter). Brakes must be “dried” as soon as possible by carefully braking at higher speed. Ensure that no following vehicle and no other road user is put at risk as a result of this action → ⚠️.

A **layer of salt that accumulates on the discs and pads** will delay the braking effect and increase the braking distance. If the brakes on the vehicle have not been applied for a long time on roads that have been gritted with salt, the layer of salt must be reduced through careful braking → ⚠️.

Corrosion on the brake discs and **dirt** in the brake pads are facilitated through long periods of inactivity, low mileage and low load levels. If there has been little or no use of the brake pads, or if there is corrosion, Volkswagen recommends that the brake discs and brake pads be cleaned by carefully braking several times at higher speed, always in compliance with speed limits and current driving conditions (e.g. wet or dry roads, night or day driving). Ensure that no following vehicle and no other road user is put at risk as a result of this action → ⚠️.

Brake servo

The brake servo will only function when the engine is running and reinforces the pressure applied by the driver on the brake pedal.

If the brake servo is not functioning or the vehicle is being towed, the brake pedal will have to be depressed more forcefully, since the braking distance will be increased due to the lack of assistance for the brake system → ⚠️.

⚠️ WARNING

New brake pads will not have the optimal braking effect when first fitted.

- New brake pads cannot generate the full braking effect during the first 300 km and must first be “run in”. A reduced braking effect can be increased by applying more pressure to the brake pedal.
- You must drive particularly carefully when driving with new brake pads in order to reduce the risk of accidents, severe injuries and loss of vehicle control.
- Never drive too close to other vehicles when running in new brake pads, and never create a driving situation that will place a heavy load on the brakes.

⚠️ WARNING

Overheated brakes reduce the braking effect and considerably increase the braking distance.

- When driving downhill the brakes are placed under particular strain and become hot very quickly.
- Non-standard or damaged front spoilers could restrict the airflow to the brakes and cause them to overheat.

⚠️ WARNING

Wet brakes or brakes coated with ice or road salt react more slowly and require longer braking distances.

- Carefully apply the brakes to test them.
- Always dry brakes and clean off any coating of ice and salt with a few cautious applications of the brake when visibility, weather, road and traffic conditions permit.

WARNING

Driving without the brake servo can considerably increase the braking distance and thus cause accidents and serious injuries.

- Never allow the vehicle to roll if the engine is switched off.
- If the brake servo is not functioning or the vehicle is being towed, the brake pedal will have to be depressed more forcefully, since the braking distance will be increased due to the lack of assistance for the brake system.

NOTICE

- Never let the brakes “rub” by applying light pressure to the brake when it is not necessary to brake. Continual pressure on the brake pedal will overheat the brakes. This can considerably reduce the brake effect, increase the braking distance and, in certain circumstances, cause the brake system to fail completely.
- Before driving down a long, steep gradient, reduce speed and change to a lower gear or move the selector lever to a lower gear. This will make use of the engine braking effect and relieve the load on the brakes. The brake system could otherwise overheat and fail. Only use the brakes to slow down or stop the vehicle.

 If the front brake pads are tested, the rear brake pads should be tested at the same time. visual check of the thickness of all brake pads should be carried out regularly by checking the brake pads through the openings in the wheels or from the underside of the vehicle. If necessary, remove the wheels to carry out a comprehensive check. Volkswagen recommends using a Volkswagen Dealership for this purpose. 

Driving a loaded vehicle

For good vehicle handling when driving a loaded vehicle, please observe the following:

- Stow all items of luggage securely → page 195.
- Accelerate carefully and gently.
- Avoid sudden braking and driving manoeuvres.
- Brake earlier than in normal driving.
- If applicable, observe the information concerning driving with towing mode → page 199.

WARNING

Moving loads can severely impair the vehicle's stability and driving safety, which can cause accidents and severe injuries.

- Secure objects properly to prevent them from sliding.
- Use suitable straps when securing heavy objects.
- Secure the rear seat backrest in an upright position. 

Driving with the rear lid open

Driving with the boot lid open is particularly dangerous. Ensure that the open boot lid and any objects are secured properly, and adopt appropriate measures to reduce the quantity of toxic exhaust fumes entering the vehicle.

WARNING

Driving with an unlocked or open boot lid can cause serious injuries.

- Volkswagen recommends not driving with an open boot lid. However, if such scenario is absolutely indispensable, observe the following instructions:
 - Always stow all objects in the luggage compartment securely. Loose objects can fall out of the luggage compartment and injure other road users.
 - Always drive carefully and defensively.
 - Avoid any abrupt or sudden driving and braking manoeuvres as this can cause the open boot lid to move unpredictably.
 - Any objects protruding from the luggage compartment must be marked to ensure that they are visible to other road users. Legal provisions must be followed.
 - In case of objects protruding from the luggage compartment, the boot lid must never be used to “hold” or “fasten” objects.
 - Remove the load mounted over the boot lid whenever it is necessary to drive with the boot lid open. 

⚠ WARNING

Poisonous exhaust fumes may enter the vehicle interior when the boot lid is open. This could result in loss of consciousness, carbon monoxide poisoning, serious injury and accidents.

- Always drive with the boot lid closed in order to prevent toxic gases from entering the vehicle.
- If exceptional circumstances require you to drive with an open boot lid, you must do the following to reduce the quantity of toxic exhaust fumes that could enter the vehicle:
 - Close all windows.
 - In vehicles with air conditioning, switch off the air recirculation mode.
 - Open all vents in the dash panel.
 - Switch the blowers to the highest setting.

📢 NOTICE

The vehicle level changes when the boot lid is open.

⚠ WARNING

After driving through water, mud and dirt roads the brakes may be hindered due to the humidity or freezing of brake pads or disks, increasing the braking distance.

- “Dry the brakes and eliminate ice” through careful braking manoeuvres. Proceed without putting other drivers at risk or failing to abide by legal requirements.
- Avoid sudden braking manoeuvres after crossing through water in roads.

📢 NOTICE

- When driving through water in roads, some vehicle components such as the engine, transmission, chassis or electrical system, may be severely damaged.
- Never drive through salt water, since salt can cause corrosion. Rinse all components that have been exposed to salt water immediately with fresh water.

Driving through water on roads

Avoid driving through water on roads. Driving under such conditions hinders the driveability, and may cause severe damages to the vehicle, compromising the safety of the driver and other passengers. If absolutely necessary to cross the flooded area, observe the following in order to prevent damages to the vehicle, driver, and passengers:

- Check the water depth before driving through water on roads. The water level must be **no higher** than the lower edge of the vehicle body (underneath the doors) → 📢.
- Do not drive faster than walking speed.
- Never stop the vehicle, reverse or switch off the engine while in water.
- Oncoming vehicles create waves that can increase the water level for your vehicle to such an extent that it is not safe to drive through the water.
- When crossing flooded areas, vehicles with Start-Stop system disable the system manually → page 102.

Running-in

A new engine needs to be run in during the first 1,500 kilometres. All the moving parts must be able to adjust themselves to each other. During the first hours of operation the engine has to cope with a higher internal friction than later on.

Up to 1,000 kilometres, the following applies:

- Do not fully depress the accelerator.
- Do not drive the vehicle at more than 2/3 of the top engine speed.
- Do not drive with a trailer attached.

Between 1,000 and 1,500 kilometres

- *Gradually* increase the speed and engine rpm, limited to the respective driving location.

The style of driving during the first 1,500 kilometres will also affect the engine quality. Even after the engine has been run-in, and especially with a cold engine, drive the vehicle at moderate rpm's in order to reduce engine wear and to increase its useful life span.

Do not drive at engine speeds which are too low. Always shift down gear if the engine is not running “smoothly”.

 If the engine is run in gently, the life of the engine will be increased and its oil consumption reduced.

Using the vehicle in other countries and continents

The vehicle is produced specifically for a certain country and complies with this country's registration regulations valid at the time of vehicle production.

If the vehicle is going to be sold in another country or used in another country for an extended period, the legal requirements applicable in that country must be observed.

In some cases, certain equipment will have to be fitted or removed and functions deactivated. The scope and type of service available may also be affected. This is particularly important if the vehicle is driven in another climate region for a long period of time.

Because different frequency bands are used in different countries, the radio unit may not work in other countries.

NOTICE

- Volkswagen may not be held liable for damages caused to the vehicle due to low-quality fuel, inadequate servicing work, and use of non-genuine parts.
- Volkswagen may not be held liable in case the vehicle does not comply or only partially complies with legal requirements from other countries and continents.

Troubleshooting

Brake system malfunction

A brake circuit may have failed if you have to reduce speed and the vehicle does not brake as normal (sudden increase in braking distance). This will be indicated by the warning lamp  and in some cases a text message. Go to a Volkswagen Dealership as soon as possible. Drive at low speed when doing this and anticipate much longer braking distances and an increase in the pressure required on the pedal.

Starting and stopping the engine

Ignition cylinder



Fig. 86 Next to the steering wheel, to the right: vehicle key positions on the ignition cylinder.

Positions of the key in the vehicle → Fig. 86

- ① Ignition switched off. The vehicle key may be removed.
- ② Ignition switched on.
- ③ Step on the brake pedal – (vehicles with automatic gearbox), or on the clutch pedal (vehicles with manual gearbox) and turn the engine on. When the engine catches on, release the ignition key. Upon release, the vehicle key returns to position → Fig. 86 ①.

Ignition-on indicator

According to the version of the vehicle, the ignition-on indicator may not be available.

When the driver door is opened with the ignition on, the warning **IGNITION ON**  may appear on the instrument cluster display in addition to an acoustic warning.

The acoustic warning is to remind the driver to turn the ignition off prior leaving the vehicle.

WARNING

Improper vehicle key use may cause severe injuries.

- Always take all vehicle keys with you when you leave the vehicle. The engine can be started and electrical equipment such as the window controls can be operated, which may lead to severe injuries.
- Never leave unattended children or people with special needs in the vehicle. They could become trapped in the vehicle in an emergency and may not be able to get themselves to safety. Depending on the time of year, for example, locked vehicles can be subjected to very high or very low temperatures. This can cause serious injuries and illness or fatalities, especially for small children.
- Never remove the vehicle key from the ignition cylinder while the vehicle is in motion.

NOTICE

With the ignition turned on and engine off, the battery of the vehicle may discharge and render a new start up of the engine impossible.

- Always turn off the ignition prior leaving the vehicle.

i Vehicles with automatic gearbox, if it is not possible to remove the key from the ignition lock with the vehicle stopped, move the selector lever to position P. If necessary, press and release the selector lever interlock button.

Starter button



Fig. 87 On the lower part of the centre console: engine start button.

The (Press & Drive) starter button replaces the ignition lock.

According to the vehicle version, the start button may not be available.

The vehicle's engine is started with the (Press & Drive) start button.

The vehicle can only be started when there is a valid key inside the vehicle. If the key is out of range, the vehicle is not activated and the warning on the dash panel cannot be issued immediately.

Switching the ignition on or off

Press the start button once, without hitting the brake or clutch pedal → .

Automatic ignition turn off

When the driver moves away from the vehicle with the vehicle key and ignition on, the ignition will automatically turn off after some time. Should the dipped beam be turned on during this time, the side lights stay on for about 30 minutes. The side light can be turned off by locking the vehicle → page 59 or manually → page 75.

After the vehicle has detected that the driver is absent with the automatic engine turn off enabled, the ignition is automatically turned off after a given span of time.

WARNING

Unsupervised vehicle movements may cause severe injuries.

- To turn the ignition on, *do not* hit the brake or clutch pedal as this will immediately start the engine.

WARNING

Improper or unsupervised use of the vehicle keys can cause severe accidents or injuries.

- Always take all vehicle keys with you when you leave the vehicle. Unauthorized people or children can lock the vehicle, start the engine or turn the ignition on and thereby operate the electric equipment such as, for example, the electric windows.

i When leaving the vehicle, always turn the ignition off manually or, should it be the case, observe the instructions on the instrument cluster display.

 Longer stopped periods with the ignition turned on may discharge the 12V vehicle battery to the point when it is no longer possible to start the engine.

 If, for example, the vehicle key battery is flat or very weak, the engine may not start with the start button. In this case use the emergency start function → page 102.

Start the engine

Vehicles with ignition lock:

- Turn the vehicle key into position → Fig. 86 ①. Ignition switched on.
- Press and firmly hold the brake pedal pressed.
- *Vehicles with manual gearbox:* step on the clutch pedal and hold it firmly pressed until the engine is running. Position the gear selector lever into the neutral position.
- *Vehicles with automatic gearbox:* position the selector lever to position **P** or **N**.
- Turn the vehicle key in the ignition lock to position → Fig. 86 ② – do not accelerate. When the engine catches, release the ignition key.
- If the engine does not start, stop the procedure and repeat it after approximately one minute.
- Release the handbrake if you wish to pull away → page 134.

Vehicles with start button:

- Press the start button once. Ignition switched on.
- Press and firmly hold the brake pedal pressed.
- *Vehicles with manual gearbox:* step on the clutch pedal and hold it firmly pressed until the engine is running. Position the gear selector lever into the neutral position.
- *Vehicles with automatic gearbox:* position the selector lever to position **P** or **N**.
- Press the start button → page 99 – do not accelerate. To start the engine there must be a valid vehicle key in the vehicle's interior. When the engine catches on, release the start button.
- If the engine does not start, stop the procedure and repeat it after approximately one minute.

- If necessary, execute the emergency start → page 102.
- Release the handbrake if you wish to pull away → page 134.

WARNING

The risk of serious injury can be reduced with the engine running or when starting the engine.

- Never start or run the engine in unventilated or closed spaces. The exhaust fumes contain carbon monoxide, an odourless and colourless poisonous gas. Carbon monoxide can cause loss of consciousness and death.
- Never leave the engine running if you leave the vehicle unattended. The vehicle could move suddenly or something unexpected may happen that may cause damage and serious injuries.
- Never use a start booster. A start booster can explode and cause the engine to suddenly run at high revs.

WARNING

Never leave the vehicle while the engine is running. The vehicle may move unexpectedly and cause severe accidents and injuries, especially with the selected gear or respective gear position.

NOTICE

- The starter engine or engine may be damaged when attempting to start the engine while driving or when the engine is started immediately after being switched off.
- While the engine is cool, avoid high rotations, total acceleration and increased engine load.
- Do not push or jump start the engine. Unburnt fuel may damage the catalytic converter.

 Do not leave the engine running when the vehicle is stationary. Immediately resume driving when there is good visibility in the windows; be careful not to force the engine while cold. This allows the engine to reach its operation temperature faster and reduces emissions.

 When starting the engine, major electrical consumers are switched off temporarily.

 When starting from cold, the engine may be a little noisy for a short period of time. This is quite normal, and no cause for concern.

Stopping the engine

- The vehicle must be completely stationary → .
- *Vehicles with ignition lock*: rotate the vehicle key in the ignition lock to → Fig. 86 .
- *Vehicles with start button*: press the start button briefly → Fig. 87. If the engine won't stop, execute the emergency shut down → page 102.
- Observe the instructions on the instrument cluster → page 12.

WARNING

Never switch off the engine while the vehicle is in motion. This can lead to loss of control of the vehicle and cause severe accidents and injuries.

- The airbags and belt tensioners will not work if the ignition is switched off.
- The brake servo will not work when the engine is switched off. When the engine is switched off, greater force is required on the brake pedal to stop the vehicle.
- When the vehicle key is removed from the ignition lock, the steering lock may engage and it will no longer be possible to manoeuvre the vehicle.

WARNING

The components of the exhaust system become very hot. This can cause fires and serious injuries.

- Never park the vehicle so that parts of the exhaust system can come into contact with inflammable material underneath the vehicle, e.g. leaves, dry grass, spilt fuel, etc.
- Never apply underseal or anti-corrosion coatings to the exhaust pipes, catalytic converter, diesel particulate filter or the heat shields on the exhaust system.

WARNING

After turning off the engine, the diagnostic system will act to identify and prevent fuel vapours from being released into the atmosphere. The diagnostic system is audible and located at the rear of the vehicle. It may take a few minutes to complete its operating routine.

NOTICE

If the vehicle has been driven at high load for a long period, the engine could overheat when it is switched off. In order to avoid damage to the engine, allow the engine to run in neutral for approximately 2 minutes before switching it off.

 *Vehicles with automatic gearbox*, if it is not possible to remove the key from the ignition lock with the vehicle stopped, move the selector lever to position **P**. If necessary, press and release the selector lever interlock button.

 After the engine is switched off, the radiator fan in the engine compartment may run on for some minutes, even if the ignition is switched off or the vehicle key has been removed. The radiator fan will switch itself off automatically. 

Electronic immobilizer

The immobilizer helps prevent the engine from being started and driven with an unauthorised vehicle key.

There is a chip in the key. It automatically deactivates the immobilizer when the vehicle key is inserted into the ignition cylinder.

The electronic immobilizer is automatically activated when the vehicle key is removed from the ignition lock → page 59. For vehicles with Keyless Access, the vehicle key must be outside the vehicle → page 58.

For this reason it is only possible to start the engine with a correspondently coded genuine Volkswagen vehicle key. Coded vehicle keys can be obtained at a Volkswagen Dealership. → page 56

 Proper vehicle operation is only guaranteed with genuine Volkswagen keys. 

Troubleshooting

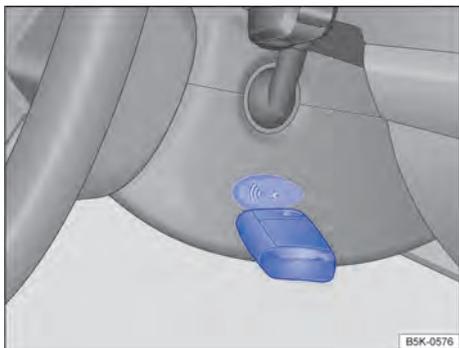


Fig. 88 To the right of the steering column: emergency start function of vehicles with Keyless Access locking and start system.

Instrument cluster indicator and warning lamps

The indicator and warning lamps are on:

EPC Engine management system fault (Electronic Power Control). The engine must immediately be checked at a Volkswagen Dealership.



Faulty emissions in the exhaust system (OBD). Reduce your speed. Carefully drive to the nearest Volkswagen Dealership. The engine must be checked.

Unauthorized vehicle key

When an unauthorized vehicle key is inserted in the ignition lock it can be removed as follows:

- *Vehicles with manual gearbox:* remove the key from the ignition lock.
- *Vehicles with automatic gearbox:* press and release the interlock button on the selector lever. Remove the vehicle key from the ignition lock.

Emergency start function

When no valid vehicle key inside the vehicle is detected, execute the emergency start function. A corresponding indicator will come up on the instrument cluster display. This can be the case when, for example, the vehicle key battery is weak or discharged.

- Press and hold the brake pedal.
- Hold the vehicle key after pressing the start button directly to the right of the steering column → Fig. 88.
- The ignition is automatically turned on, and, if the case, the engine is started.

Emergency shut down

When the engine does not stop when the start button is briefly pressed, the emergency shut down needs to be executed:

- Press the start button twice within a few seconds or keep it pressed once for a long time.
- The engine automatically shuts down → ⚠ in *Starter button* on page 99.

Immobiliser malfunction

When an invalid vehicle key is used or when the system is damaged, a corresponding indication pops up on the instrument cluster display. The engine will not be able to be switched on. Use a valid vehicle key or visit a Volkswagen dealership. ◀

Start-Stop System

Start-Stop system



Fig. 89 On the centre console: Start-Stop system button (depending on vehicle version).

Depending on the vehicle or the radio version, the Start-Stop system may not be available.

The Start-Stop system automatically turns off the engine after stopping the vehicle and during the vehicle stopping stages. If necessary, the engine automatically starts up again. ▶

Turn on the Start-Stop system

The function is automatically enabled whenever the ignition is switched on. The instrument cluster display shows information regarding the current status.

In the radio system other information regarding Start-Stop mode can be accessed via the **CAR** button or the **MENU** function button and the function buttons **Vehicle**, **Selection**, **Vehicle status** **OR** on the main radio screen, drag to the left once and select **Vehicle status**.

When crossing through flooded areas, always manually turn the Start-Stop system off.

Indicator lamps

When the  indicator lamp is on, it indicates that the Start-Stop system is on and the automatic engine stop is active.

When the  indicator lamp is on, the Start-Stop system is not available or the engine was automatically started by the Start-Stop system → page 103.

The Start-Stop system's status is shown on the instrument cluster display.

Vehicles with manual gearbox

- During inertial movement or with the vehicle stopped, place it in neutral and release the clutch pedal. The engine is turned off.
- To turn the engine back up, simply step on the clutch pedal.

Vehicles with automatic gearbox

- To stop the vehicle, step on the brake pedal and keep it pressed. Shortly before the vehicle stops or upon stopping, the engine shuts down.
- To start the engine up again, remove foot from the brake pedal or step on the accelerator.

Important conditions for the automatic engine shutdown to work

- The driver must fasten the seat belt.
- The driver's door must be closed.
- The bonnet must be closed.
- A minimum engine temperature must be reached.
- *Vehicles with Climatronic*: the vehicle interior temperature is within the set temperature range and the humidity is not too high.

- The air conditioning defrost function must be off.
- The 12-V vehicle battery must have enough charge.
- The 12-V vehicle battery's temperature must not be too high or too low.
- The vehicle is not on a steep up- or downhill incline.
- The steering wheel must not be completely turned.
- The windscreen wiper must not be on.
- The reverse gear must not be engaged.
- The Park Assist system must not be activated.

If the automatic engine shutdown conditions are only reached during a stop, the engine will shut down subsequently, for example, upon turning off the defrost function.

Conditions for a new automatic start

The engine can start automatically under the following conditions:

- If the vehicle interior gets too hot or too cold.
- When the vehicle starts moving.
- When the 12 V battery charge is low.
- When the steering wheel is moved.

Conditions that require a manual engine start

The engine must be started manually under the following conditions:

- When the driver door is opened.
- When the bonnet is opened.

Essentially: the engine will always automatically start up again when such is required for the vehicle and for the detected situation.

Drive on function

When a valid vehicle key is not detected inside the vehicle after turning the engine off, it is possible to start the engine again within five seconds. A corresponding message will be displayed on the instrument cluster.

After this short period of time it is no longer possible to start the engine without a valid vehicle key inside the vehicle. ►

Manually enable and disable the Start-Stop system

- Press  on the centre console → Fig. 89 OR on the radio display to manually disable the system.
- Press  on the centre console → Fig. 89 OR on the radio display again to manually reenable the system.

Whenever the  button is pressed, the instrument cluster display will indicate the Start-Stop system status.

If the engine was shut down by the Start-Stop system, it will start up again as soon as the system is disabled by pressing the  button.

When crossing through flooded areas, always manually turn the Start-Stop system off.

WARNING

Improper or unsupervised use of the vehicle keys can cause accidents or injuries.

- When leaving the vehicle, turn off your engine and always carry all the vehicle keys when leaving the vehicle. Whenever you lock your doors, make sure there are no people inside. Unauthorized people or children can lock the vehicle, start the engine or turn the ignition on and thereby operate the electric equipment such as, for example, the electric windows.

WARNING

Never switch off the engine while the vehicle is in motion. This can lead to the loss of control of the vehicle, to severe accidents and injuries.

- The airbags and belt tensioners will not work if the ignition is switched off.
- The brake servo will not work when the engine is switched off. A stronger action on the brake pedal is required to stop the vehicle.
- The power steering works when the engine is not running.
- When working in the engine compartment the Start-Stop system must be disabled.

NOTICE

If the Start-Stop system is used for an extended period of time at excessively high exterior temperatures, the 12-V battery may be damaged.

 In some cases, the engine has to be manually restarted. Follow the message shown on the instrument cluster display.

 At temperatures above 38°C, the engine shutdown function may be automatically turned off.

 For vehicles with selectable driving profile, when the **Eco** profile is selected the Start-Stop system is automatically enabled.

 When crossing through flooded areas, always manually turn the Start-Stop system off. ◀

Troubleshooting

The engine does no longer start automatically

Vehicles with automatic gearbox: if the engine does not start automatically, the following warning message **Error: Vehicle power system. Go to a workshop.** May be displayed on the instrument cluster display.

- Manually start the engine → page 102.
- Manually turn off the Start-Stop system.
- Immediately seek assistance from a Volkswagen Dealership or a qualified workshop. ◀

Manual gearbox

Manual gearbox: engaging the gear

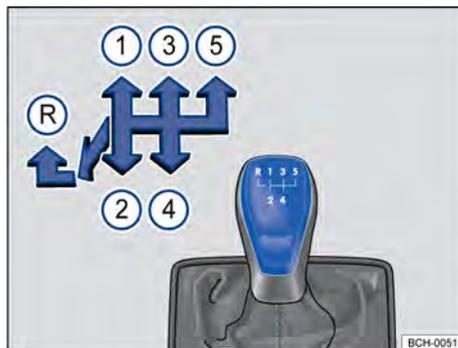


Fig. 90 Gear shift pattern of a 5-speed manual gearbox. ▶

Engaging a forward gear

Each gear position is illustrated on the gear lever → Fig. 90.

- Fully depress and hold the clutch pedal.
- Position the gear selection lever into the neutral position → ▲.
- Gently release the clutch pedal to start moving.

Volkswagen recommends stepping fully on the clutch pedal to start the engine.

Selecting reverse gear

- Reverse gear should only be selected when the vehicle is stationary.
- Fully depress and hold the clutch pedal → ▲.
- Move the gear lever to the neutral position and push down.
- Push the gear lever fully to the left and then to the front in the reverse gear position → Fig. 90 (R).
- Gently release the clutch pedal to start moving.

Shifting down gears

You should always select the next immediate gear when shifting down a gear whilst the vehicle is in motion. Engine revs should not be too high when doing so → ▲. The clutch, gearbox and engine may be damaged if one or more gears are skipped when shifting down a gear at high speeds or high engine revs, even if the clutch is not released in the process → ⓘ.

⚠ WARNING

When the engine is running, the vehicle will start to move as soon as a gear is engaged and the clutch released.

- Never switch off the engine while the vehicle is in motion.
- Never select reverse gear while the vehicle is in motion.

⚠ WARNING

Shifting gears incorrectly to a lower gear can lead to a loss of control of the vehicle, which can cause accidents and serious injuries.

ⓘ NOTICE

The clutch, gearbox and engine may be severely damaged if the gear stick of the manual gearbox is shifted to a gear which is too low when travelling at high speeds or at high revs. This also applies if the clutch remains depressed and the gears do not engage. <

Trouble shooting

According to vehicle version, some indicator lamps may not be available.

- ⚙ The clutch does not support the full engine torque. If it is the case, take foot off the clutch pedal.
- ⚠ The clutch may get very hot, for example, from frequent pulling away, "slow driving" or heavy stop-and-go traffic. Its overheating is indicated by the warning lamp and, if it is the case, by additional warning lamps, as well as by a text message displayed on the instrument cluster display. Moreover an acoustic alarm may also be sounded → ⓘ.
- ⚠ The clutch is defective. **Proceed carefully!** Go to a Volkswagen Dealership or qualified workshop. Otherwise, severe damages may occur to the clutch.

ⓘ NOTICE

Please note the following points in order to avoid damage and premature wear:

- Do not rest your hand on the gear lever when driving. The pressure from your hand is passed onto the selector forks in the transmission.
- Ensure that the vehicle has come to a full stop before engaging reverse gear.
- Always fully depress the clutch pedal when changing gear.
- Do not hold the vehicle by "riding" the clutch on a hill with the engine running. <

Automatic gearbox

Automatic gearbox: engaging gears

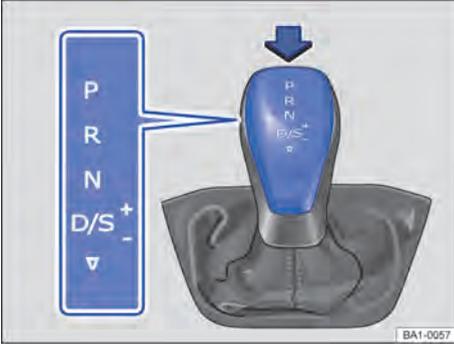


Fig. 91 Automatic gearbox selector lever with interlock button (arrow).

According to the vehicle version, the automatic gearbox may not be available.

The engaged gear or gearbox driving programme is indicated on the instrument cluster when the ignition is on.

P – Parking lock

The traction wheels are mechanically blocked. Engage only while the vehicle is *stationary*. To move the selector lever from its position with the ignition turned on, actuate the brake pedal and press the interlock button on the selector lever.

R – Reverse gear

Reverse gear engaged. Engage only while the vehicle is *stationary*.

N – Neutral

The gearbox is in the neutral position. No force is transmitted to the wheels and the braking effect of the motor is not available.

D/S – Permanent forward driving position

Position D: normal style program

All forward gears are shifted up and down automatically. The timing of the gear shift is determined by the engine load, your individual driving style and the speed of the vehicle.

Position S: sport style driving program

The gear levels are increased *later* and reduced *earlier* than when in **D** position to make the best use of the power reserves of the engine. The timing of the gear shift is determined by the engine load, your individual driving style and the speed of the vehicle.

Move the selector lever backwards $\nabla \rightarrow$ **Fig. 91** to switch between position **D** and **S**.

In this, the selector lever will always elastically return to the **D/S** position. This also works for the Tiptronic gate \rightarrow page 107.

Selector lever lock

In position **P** or **N**, the selector lever lock prevents an accidental selector move that would involuntarily put the vehicle in motion.

To release the selector lever lock with the ignition on, push the brake pedal down and keep it pressed. At the same time, press the selector lever lock button into the direction indicated by the arrow \rightarrow **Fig. 91**.

For fast gear change passing through the **N** position, for example, from **R** to **D/S**, the selector lever is not locked. Thereby it is possible to “rock” a vehicle back and forth out of a bog. The selector lever lock engages when, with the brake pedal released, the lever lingers in the **N** position for over about a second and at a speed of less than about 5 km/h.

WARNING

Engaging an incorrect selector lever position may lead to the loss of control of the vehicle, accidents and severe injuries.

- Never depress the gas pedal when selecting a gear.
- When the engine is running and the selector is in a drive position, the vehicle will start moving as soon as the brake pedal is released.
- Never move the selector lever to reverse or to **P** while driving.

WARNING

Unsupervised vehicle movements may cause severe injuries.

- The driver must never leave the driver seat if the engine is running and a gear has been selected. If you have to leave the vehicle while

the engine is running, always firmly apply the handbrake and move the selector lever to position **P**.

- With the engine running and the selector lever engaging position **D/S** or **R**, it is necessary to step on the brake to keep the vehicle stationary. Even when the engine is idling, the vehicle will “creep forward/backward” as the power transmission is not fully interrupted.
- Never move the selector lever into **P** with the vehicle in motion.
- Never leave the vehicle with the selector lever in position **N**. The vehicle will roll downhill regardless of whether or not the engine is running.

NOTICE

When, with the vehicle stationary, the handbrake is **not** engaged and the brake pedal is released with the selector lever in position **P**, the vehicle can still roll a few centimetres back and forth.

i If while driving, the **N** position is accidentally selected, let go off the accelerator. Await the engine idle rotation in neutral position before selecting a different gear.

Shifting gears with the Tiptronic

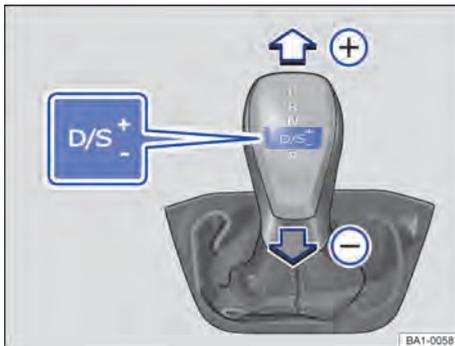


Fig. 92 Selector lever in Tiptronic position.



Fig. 93 Steering wheel with Tiptronic gear shift paddles.

With the automatic gearbox, the gears can be manually stepped up or down with the Tiptronic.

Operating the Tiptronic with the selector lever

- In position **D/S**, move the lever to the right up to the Tiptronic gate.
- Move the selector lever forward (+) or backward (-) to increase or decrease the speed → Fig. 92.

Operating the Tiptronic with the shift paddles

- Pull the right steering wheel paddle lever → Fig. 93 to step up the gears.
- Pull the left steering wheel paddle lever to step down the gears.
- Pull the right shift paddle towards the steering wheel for about one second to disable the Tiptronic.

The Tiptronic is automatically disabled when the shift paddles are not used for a while or the selector lever is not in the Tiptronic gate.

NOTICE

- When accelerating, the gearbox automatically shifts up to the next gear shortly before the maximum permitted engine speed is reached.
- When shifting down a gear manually, the gearbox will not change gear until the engine can no longer be overrevved.

Driving with automatic gearbox

Forward gears are shifted up and down automatically.

Driving downhill

The steeper the gradient, the lower the gear you will need. Lower gears increase the braking effect of the engine. Never allow the vehicle to roll down mountains or hills in the neutral position **N**.

- Reduce your speed.
- Press the selector lever from position **D/S** to the right in the direction of the Tiptronic gate → page 107.
- Gently push the selector lever to the rear to change down gear.
- **OR:** reduce the gear speed with the shift paddles on the steering wheel → page 107.

Stopping and proceeding uphill

The steeper the gradient, the lower the gear you will need.

When stopping on an uphill slope with engaged gear, the vehicle must always be prevented from moving by stepping on the brake pedal or engaging the handbrake. Release the brake or handbrake only upon pulling away → .

Kick-down

The kick-down function allows maximum acceleration with the selector lever in position **D/S** or in the Tiptronic position.

Upon fully stepping down on the accelerator, the automatic gearbox engages a lower gear. This will make use of the full vehicle acceleration → .

With the kick-down, the automatic increase to the next gear occurs only when the maximum prescribed engine rpm is reached.

WARNING

A rapid acceleration can cause loss of traction and skidding, particularly on slippery roads. This can lead to loss of control of the vehicle, severe accidents and injuries.

- Always adjust your driving style in accordance with the flow of traffic.

- The Kick-Down function or fast acceleration must only be used visibility, weather, road and traffic conditions permitting and other road users are not compromised due to the vehicle acceleration and driving style.

WARNING

Never “ride” the brake pedal. Do not overuse the brake pedal. Constant braking will cause the brakes to overheat. This can considerably reduce the brake effect, increase the braking distance and, in certain circumstances, cause the brake system to fail completely.

NOTICE

- If you stop the vehicle on an incline, do not attempt to stop it from rolling back by depressing the accelerator when a gear has been selected. This may overheat and damage the automatic gearbox.
- Never allow the vehicle to roll with the selector lever in position **N**, particularly when the ignition is switched off. The automatic gearbox is not lubricated and can be damaged.

NOTICE

- Never let the brakes “slip” by applying light pressure to the brake when it is not really necessary to brake. This will increase wearing.
- Before driving down a long, steep downhill gradient, reduce the speed and change to a lower gear. This will make use of the braking effect of the electric drive and relieve the load on the brakes. The brake system could otherwise overheat and fail. Only use the brakes when necessary to slow down or stop the vehicle.

Troubleshooting

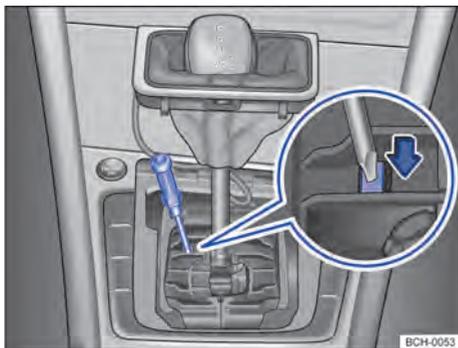


Fig. 94 Remove the selector lever cover and manually emergency unlock the selector lever lock.

Warning and indicator lamps on the instrument cluster

The indicator lamps light up.



Stop driving! Gearbox damaged. Let the gearbox cool down with the selector lever in position **P**. If the warning does not turn off, do not drive on and seek specialized technical assistance. Otherwise the gearbox may suffer severe damage.



Brake pedal not pressed, for example, during an attempt to select another gear position with the selector lever. Step on the brake pedal to select a gear.

The indicator lamps flash.



The interlock button of the selector lever is not pressed. The pull away is impeded. Engage the lock of the selector lever lock → page 106.

Selector lever troubleshooting



On rare occasions the selector lever lock may not engage on vehicles with automatic gearbox. The drive is then deenergized to prevent an unsupervised pull away. The indicator light flashes and, in addition, an informative text is displayed. To engage the selector lever lock, proceed as follows:

- press the brake pedal and release the pedal again.

Emergency unlocking the selector lever

Should the vehicle need to be towed during a failure of power supply, for example, a flat 12 V vehicle battery, an emergency unlocking of the selector lock lever will have to be performed. Seek expert assistance for this.

The emergency unlock is located underneath the selector lever frame cover.

Removing the selector lever cover

- Apply the handbrake.
- Switch off the ignition.
- Carefully pull the cover with the electric cables connected upward in the area of the selector lever trim.
- Double the cover up over the selector lever → ⚠.

Emergency unlock the selector lever lock

- With the help of a screwdriver carefully press the release lever in the direction indicated by the arrow and keep it in that position → Fig. 94.
- Press the interlock button on the selector lever and move the lever to the **N** position.
- After emergency unlocking, reinstall and carefully press the cover on the centre console, paying attention to the correct position of the electric cables.

Emergency program

The system is damaged when all selector lever position indicators are highlighted by a light background on the instrument cluster display. The automatic gearbox operates under an emergency programme. Under the emergency programme the vehicle can still run, however at reduced speed and not in all gears.

With automatic gearbox, in some cases **it will no longer be possible to drive in reverse gear**.

In all cases, the automatic gearbox must immediately be checked by a Volkswagen Dealership. ▶

Automatic gearbox overheating



The automatic gearbox may get very hot, for example, from frequent pulling away, "slow driving" or heavy stop-and-go traffic. Its overheating is indicated by the warning lamp and, if it is the case, by a text message on the instrument cluster display. An acoustic alarm may also be sounded. Stop the vehicle and wait until the transmission cools down → ⓘ.

The vehicle does not move backward nor forward despite the engaged gear level

If the vehicle does not move in the desired direction, the gear position may not be properly engaged. Next, step on the brake pedal and select the desired gear once again.

If the vehicle still does not move to the desired location, the system is faulty. Seek specialized technical support and inspect the system.

WARNING

Never take the selector lever out of the **P** position while the handbrake is not engaged. Otherwise, on slopes, the vehicle may roll away unexpectedly and thereby cause severe accidents and injuries.

NOTICE

When the vehicle is driven for a longer period with the engine turned off and the selector lever in position **N**, or at a higher speed, the automatic gearbox will be damaged, for example, when being towed.

NOTICE

- As soon as the transmission overheating is shown for the first time, the vehicle must be safely parked or driven at speeds above 20 km/h.
- When the text message and the acoustic warning are repeated every 10 seconds, the vehicle must be stopped safely immediately and the engine shut off. Wait until the transmission cools down.
- To prevent damage to the gearbox, drive-on only when the acoustic alarm is no longer sounded. While the transmission is overheated, starting the vehicle or driving at walking speeds must be avoided.

Uphill assist system

The uphill assist system (HHC - Hill Hold Control) assists the driver with pulling away uphill, by holding the vehicle.

The uphill assist system is automatically enabled under the following circumstances

Vehicles with manual gearbox

The following conditions must be **simultaneously** met:

- ① Keep the vehicle **stopped** with the brake pedal on an uphill gradient of about 5%.
- ② The engine runs "in a regular way".
- ③ Step fully on the clutch pedal and engage the gear shift lever in the **1st gear** to drive uphill forward, or in the **R** position to drive uphill in reverse gear.

To pull away, take foot off the brake pedal and at same time release the clutch pedal (engage) and accelerate as needed. **Upon releasing the brake pedal, the vehicle is held in place for approximately 2 seconds. The brake is slowly released upon starting. If starting does not occur within two seconds, the brake is released and the vehicle will move backwards.**

Vehicles with automatic gearbox

The following conditions must be **simultaneously** met:

- ① Keep the vehicle **stopped** with the brake pedal on an uphill gradient of about 5%.
- ② The engine runs "in a regular way".
- ③ With the selector lever in position **D/S** to drive forward up hill or in position **R** to drive in reverse up hill.

To pull away, take foot off the brake pedal and accelerate as needed. **The brake is slowly released upon starting.**

The uphill assist system is immediately disabled:

- If any of the aforementioned conditions are no longer available → page 110, *The uphill assist system is automatically enabled under the following circumstances.*
- When the driver door is opened. ▶

- In case of irregular running of the engine or deficiencies in the engine.
- When the engine is turned off or "dies".

Adverse conditions:

The electronic stability program (ESC) may not identify very steep slopes (over 30%). This circumstance may affect the regular operation of the electronic stability program (ESC) and consequently the hill assist system (HHC - Hill Hold Control), emergency braking assistant (Front Assist) and parking sensor.

To restore the aforementioned systems, it is sufficient that the vehicle is turned off and on again and that the driver starts the car and drives it at a speed greater than 25 km/h for a few seconds.

CAUTION

- When the vehicle does not pull away immediately after the brake pedal is released, it may eventually roll backwards. In this case immediately hit the brake pedal or pull the handbrake.
- If the engine quits, step immediately on the brake pedal or pull the handbrake.
- When on an uphill slope with intense traffic, to prevent the vehicle from rolling backward when pulling away, step on the brake for some minutes.

Steering assistance

Information on steering

Electromechanically assisted steering consumes less power from the vehicle in comparison to hydraulically assisted steering wheels, as it is activated only when the steering wheel is turned, while with the hydraulically assisted steering, the hydraulic system is always being run, even with the vehicle moving straight ahead. With the electromechanically assisted steering a computerized control unit associated with an electric motor, sensors and a gear box replaces the hoses, pump, reservoir and fluid of a hydraulic system.

The electromechanical power steering assist is automatically adjusted based on the driving speed, the torque and the angles applied by the

conductor on the wheel to turn the vehicle. The electromechanical assist only works when the engine is running.

When the electromechanical assist is reduced or malfunctioning, a lot higher strength than usual will be required to manoeuvre the vehicle. But never will the driver lose control over the steering wheel of the vehicle.

WARNING

- The electromechanical power steering assist only works when the engine is running. In case of engine malfunction while the vehicle is moving, the electromechanical assist works for a few minutes longer in order to safely park the vehicle.
- Never allow the vehicle to roll if the engine is switched off.
- Never remove the vehicle key from the ignition cylinder while the vehicle is in motion.

Troubleshooting

Warning and indicator lamps on the instrument cluster

When switching the ignition on, certain warning and indicator lamps light up briefly to check their functions and turn off after a few seconds. If the lights turn on again:



STOP! Stop driving! Electromechanical steering assist out of action. Contact a Volkswagen Dealership immediately.



Electromechanical steering assist with limited operation. Contact a Volkswagen Dealership as soon as possible.

Driving mode selection

Introduction

The driver can adjust several features of the vehicle systems to the current driving conditions, the desired driving convenience, and a fuel saving driving style using the driving profiles. Among the vehicle's systems that can be adjusted are the running gear, engine control, and air conditioning.

Depending on the vehicle version, different driving modes are available for selection. The influence of vehicle systems in individual driving modes depends on the vehicle version.

Select driving mode



Fig. 95 On the top part of the centre console: MODE button to select driving mode.

Depending on the vehicle version, driving mode selection and/or the MODE button may not be available.

The profile can be selected with the ignition on and the vehicle stopped or while driving → ⚠.

If a driving mode is selected while driving, the vehicle's systems immediately switch to the new mode, except the engine.

- When traffic permits, quickly remove foot from accelerator pedal to allow the selected driving mode to be applied to the engine as well.

Select the driving mode with the MODE button

- 1 Press  → Fig. 95.
- 2 To select the driving mode, press  once again or touch the desired driving profile on the radio display.

OR

Select the driving mode on the radio display

- 1 Switch on the ignition.
- 2 On the main radio screen, swipe left once and select .
- 3 Touch ,  or  to select the desired driving mode on the radio display.

Show information in the driving mode.

- To show more information on the selected driving mode, touch  on the radio display.

⚠ WARNING

Adjusting driving modes while driving may distract drivers and cause accidents.

- Always drive carefully and responsibly.

Characteristics of driving modes

-  **Eco:** places the vehicle in low consumption mode and promotes economical driving.
-  **Normal:** the driving mode represents basic settings of vehicle systems and offers a moderate combination, for example, for day-to-day use.
-  **Sport:** provides a sporting feeling to the driving experience and can change the engine sound. In the Sport driving mode, in vehicles with automatic gearbox, the selector lever position is automatically switched to position S.

Default behaviours of driving modes and vehicle systems

With the ignition off, the Normal driving mode represents basic settings of the vehicle systems. ▶

Behaviour of driving modes when switching the ignition off and on again

When switching the ignition off and on again, the last driving mode selected remains active.

Behaviour of engine vehicle system when switching the ignition off and on again

As soon as the ignition is switched off and on again, the engine vehicle system settings are re-set to the **Normal** driving mode settings.

- Select the desired driving mode again.
- **OR:** to reactivate **Sport** driving mode settings, move the selector lever in the automatic gearbox backwards, into position **S**.

When switching the ignition off and on again, all other vehicle systems store the settings.

Troubleshooting

Vehicle systems or driving mode do not behave as expected

Observe the default behaviours of vehicle systems or driving modes → page 112.

Driver assist systems

Cruise control system (GRA)

Introduction

The speed regulator system (GRA) assists the driver keeping constant a set speed.

Depending on the vehicle version, the cruise control (GRA) may not be available.

Speed range

- ◀ The GRA is available for forward driving from 20 km/h onwards.

Changing gear

As soon as the clutch pedal is stepped on, the cruise control is interrupted and automatically taken up again after the gear change.

Driving downhill

- ◀ When driving downhill the set speed may be exceeded due to the slope gradient.

Use the brake to reduce the speed of the vehicle accordingly and shift to a lower gear if necessary.

How do I control the GRA?

The GRA is controlled through the multifunction steering wheel → page 114.

WARNING

When it is not possible to drive safely over a sufficient distance and at a constant speed, the cruise control system may cause severe accidents and injuries.

- Never use the cruise control system (GRA) in intense traffic, over short distances, steep, sinuous, and slippery circuits, such as ice, snow, humidity, or gravel and also not on flooded roads.
- Never use the GRA in free terrain or unpaved roads.
- Adjust the speed and safety distance to vehicles ahead based on weather, road, and traffic conditions.

- In order to prevent unexpected speed adjustments, always switch off the GRA after using.
- It is dangerous to resume stored speeds if the speed is too high for current road, traffic, or weather conditions.
- On downhill slopes, the GRA may not keep the vehicle speed constant. The vehicle's weight increases speed by itself. Reduce the gear or apply the brakes.

Operating the GRA by way of multifunction steering wheel

📖 Please refer to ⚠️ at the start of the chapter on page 113.



Fig. 96 Left side of the multifunction steering wheel (version 1): GRA operating buttons.

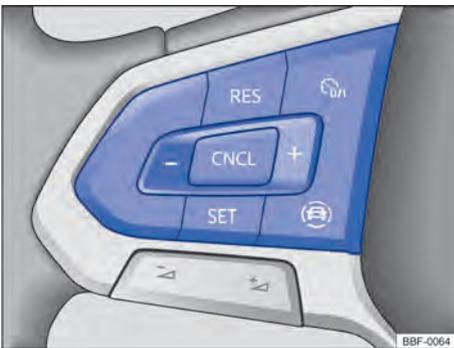


Fig. 97 Left side of the multifunction steering wheel (version 2): GRA operating buttons.

Depending on the vehicle version and country, some functions may not be available.

Switch on

- Press

No speed is saved and no control is yet active.

Starting the cruise controlling

- While driving, press

The current speed is saved and controlled. In addition the green indicator lamp lights up .

Set speed

The saved speed may be adjusted while the GRA is controlling:

- + 1 km/h
- 1 km/h
- + 10 km/h
- 10 km/h

To alter the set speed continuously, keep the button or the button pressed. The system adjusts the current speed accelerating or slowing down the vehicle accordingly. The vehicle does not actively brake.

Interrupting the control

- **Version 1:** briefly press or .
- **Version 2:** briefly press or .
- Or step on the brake as an alternative.

The speed will remain stored.

Resume operation

- Press the .

The current speed is resumed and adjusted.

Switch off

- Press the button for a moment.

The GRA is turned off and the saved speed deleted.

The button does not have any function for GRA. ◀

Troubleshooting

📖 Please refer to ⚠️ at the start of the chapter on page 113.

⚠️ Damaged GRA

- Volkswagen recommends seeking out a Volkswagen Dealership ▶

The cruise control is automatically interrupted.

Several causes are possible:

- The driver has hit the brake.
- The vehicle exceeded the set speed over a longer time period.
- System malfunction. Disable the GRA and have it checked at a Volkswagen Dealership.

Speed limiter

Introduction

The speed limiter establishes a maximum speed limit.

Depending on the vehicle version, the speed limiter may not be available.

Speed range

The speed limiter is available for forward driving from 30 km/h onwards.

Driving with the speed limiter

The speed limiter may be switched off at any moment by fully pressing the brake pedal and exceeding resistance. As soon as the preset speed is exceeded, the green indicator lamp  flashes and a sound warning may be heard. The speed will remain stored.

As soon as the preset speed is below the limit, the regulation is automatically switched back on.

How to operate the speed limiter

The speed limiter can be controlled through the multifunction steering wheel → page 115.

Display indicators

If the speed limiter is switched on, the instrument cluster display will show the stored speed and the speed limiter status:

-  Speed limiter on and speed stored.
-  Displayed small or grey: regulation off.
-  Displayed large or white: regulation on.

Driving downhill

When driving downhill, the preset speed may be exceeded due to the slope gradient. In this case, the warning and indicator lamps light up . An acoustic alarm may also be sounded.

Use the brake to reduce the speed of the vehicle accordingly and shift to a lower gear if necessary.

WARNING

To avoid unsupervised speed regulation, always switch off the speed limiter after use.

- Using the speed limiter does not exempt the driver from driving responsibilities. Do not drive with maximum acceleration unless necessary.
- Using the speed limiter in adverse conditions is dangerous and may cause severe accidents (e.g. aquaplaning, snow, ice, leaves). Only use the speed limiter in proper road and weather conditions.
- On downhill slopes, the speed limiter may not limit the vehicle's speed. Speed may increase due to the vehicle's own weight. Reduce the speed or press the brake pedal.

Speed limiter controls in the multifunction steering wheel

 Please refer to  at the start of the chapter on page 115.



Fig. 98 Left side of the multifunction steering wheel (version 1): speed limiter operating buttons.



Fig. 99 Left side of the multifunction steering wheel (version 2): speed limiter operating buttons.

Switch on

- Press .

The last preset speed is stored. No regulation is active.

Starting the cruise controlling

- Press  while driving.

The current speed is stored as the maximum speed. In addition, the green indicator lamp  lights up.

Set speed

The stored speed can be adjusted:

-  + 1 km/h
-  - 1 km/h
-  + 10 km/h
-  - 10 km/h

To alter the set speed continuously, keep the  button or the  button pressed.

Interrupting the control

- **Version 1:** briefly press  or .
- **Version 2:** briefly press  or .
- Or step on the brake as an alternative.

The speed will remain stored.

- Press  or .

Resume operation

- Press the .

As soon as the current speed is lower than the stored speed, the speed limiter will be reactivated.

Switch off

- Press and hold  for a few moments.

The speed limiter will be switched off and the speed remains stored (even with the ignition off).

Go to the Cruise Control System (GRA) or Adaptive Cruise Control (ACC)

- Press the .
- Select the desired system on the instrument cluster display.

The speed limiter will be switched off. ◀

Troubleshooting

 Please refer to  at the start of the chapter on page 115.

The cruise control is automatically interrupted.

- System malfunction. Switch off the speed limiter and look for a Volkswagen Dealership.

The speed limiter only switches off completely for safety reasons when the accelerator pedal is released once or if the system is manually switched off. ◀

Adaptive Cruise Control (ACC)

Introduction

Adaptive Cruise Control (ACC) maintains a constant speed defined by the driver. If the vehicle approaches another vehicle ahead, the ACC automatically adjusts the speed to maintain an adequate distance.

Depending on the vehicle version, Adaptive Cruise Control (ACC) may not be available.

Does the vehicle have ACC?

The vehicle has ACC if it is possible to make settings relating to automatic distance control in the assistant menu of the ACC Infotainment system. ▶

Speed range

You can set a speed between 20 km/h (15 mph) and 210 km/h (130 mph). Depending on the country and version, the maximum adjustable speed may be lower.

Driving with ACC

You can override regulation via ACC at any time. Regulation is interrupted when pressing the brake pedal. If you accelerate, the adjustment will be interrupted during the acceleration process and then continue at the set speed.

If a tow is connected, ACC regulation will be less dynamic.

Brake request

 If automatic deceleration via ACC is not sufficient or if system limits are reached, ACC will prompt you to brake as well via a message in the instrument cluster. In addition, a red warning lamp lights up and a warning sound is played. Take control of the vehicle and be ready to brake!

Radar sensor

Adaptive Cruise Control detects driving conditions using a radar sensor located in the front of the vehicle. The radar sensor's range is approximately 120 m.

WARNING

ACC does not replace the driver's attention and operates exclusively within the limits of the system. ACC does not recognize all driving situations and may not react, react late or react undesirably. In case of carelessness or inattention, there is a risk of accidents and serious injuries or even death.

- Always remain vigilant and do not rely solely on the system. The driver is responsible for all driving tasks at all times.
- Never use the ACC under intense traffic, short distances, steep, sinuous, and slippery circuits, such as snow, ice or gravel, as well as in to wet roads.
- The ACC does not react to stationary vehicles.
- The ACC does not react to people, animals, crossing vehicles or vehicles driving in the opposite direction.
- Brake immediately if the ACC speed reduction is insufficient.

- Brake immediately if the brake request message appears on the instrument cluster display.
- Brake if the vehicle continues to drive involuntarily after a brake request.
- Always be ready to take over control of the vehicle's speed.

Special driving scenarios

 Please refer to  at the start of the chapter on page 117.

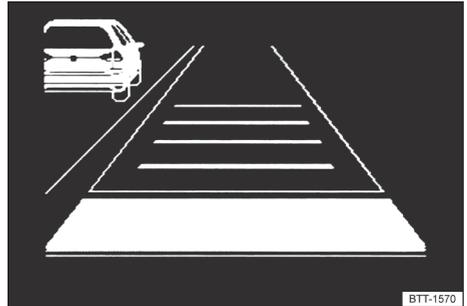


Fig. 100 On the instrument cluster display: slower vehicle detected on the left-hand lane (schematic view).

The functions described below are version dependent and are not available in all countries.

Preventative speed regulation

If a traffic sign recognition system and an Infotainment system with navigation are available in the vehicle, ACC can preventively adapt the speed to detected speed limits and the route of the journey.

Overtaking

After activating the left turn signal (left-hand traffic: activate right turn signals) to overtake another vehicle, the ACC accelerates the vehicle and reduces the distance from the vehicle ahead. This is performed without exceeding the preset speed.

If the ACC does not detect any vehicle ahead after changing lanes, the system accelerates the vehicle until reaching the preset speed.

Intense traffic

ACC can brake vehicles with automatic transmissions to a complete stop and hold them stationary. ACC remains active, the instrument cluster display shows **ACC ready to start** for a few seconds.

After this period, the vehicle applies the brake automatically, the vehicle rolls and the ACC adjustment is cancelled.

As long as ACC remains active, the vehicle starts automatically as soon as the vehicle in front starts moving and no obstacle is detected.

Extending the start-up readiness or activating it again:

- Press the **RES** button

Starting off when the start-up mode has ended and the vehicle in front has already moved away:

- Press the button **RESOR**: briefly press the accelerator pedal.

In the following cases, ACC remains inactive:

- The stopping phase lasts several minutes.
- A vehicle door is opened.
- Ignition is turned off.

Preventing overtaking on the right (traffic on the left: preventing overtaking on the left)

Vehicles prevented from overtaking on the right:

If ACC detects a vehicle travelling at a slower speed in the left lane (traffic on the left: in the right lane), ACC will brake smoothly within the system limits, preventing unauthorized overtaking. The function is active from approximately 80 km/h (around 50 mph). (around 50 mph).

Vehicles not prevented from overtaking on the right: If there are vehicles traveling at a lower speed in the passing lane on a multi-lane road, stop the adjustment.

Automatic distance control system limits

📖 Please refer to ⚠ at the start of the chapter on page 117.

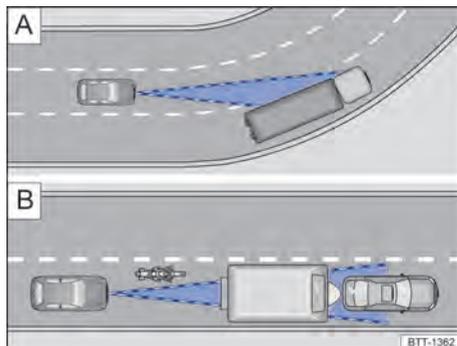


Fig. 101 A Curve condition. B Vehicles outside the radar sensor range

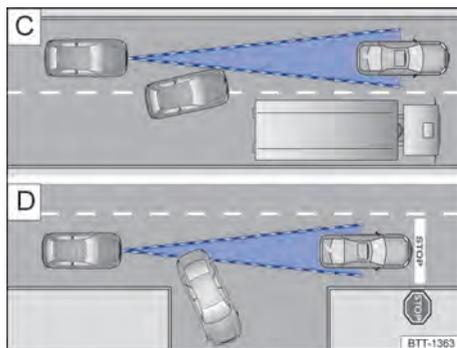


Fig. 102 C Changing lanes. D Vehicle turning or stopped.

Do not use the ACC in the following cases

Depending on the system, ACC use is not adequate in the following driving scenarios. Interrupt regulation → page 116:

- Driving in heavy rain, snow or intense fog.
- Driving in tunnels.
- Driving in work sites.
- Driving in roads with several curves (e.g. mountain roads).
- Driving in parking lots.
- Driving in roads with metallic objects incorporated to the road (e.g. train tracks).

⚠ WARNING

When the **ACC ready to go** message appears in the instrument cluster display and the vehicle in front starts, the vehicle itself will start automatically. Occasionally, obstacles on the route may not be detected. This could lead to accidents and severe injuries.

- Check the route for each starting procedure and brake the vehicle if necessary.

- Driving in gravel roads.
- Vehicles with no right-side overtaking impediment: driving in roads with multiple lanes when other vehicles in the overtaking lane are slower.

Delayed reaction

If the front radar sensor is exposed to environmental conditions that impair its operation, the system may detect a situation with a delay. Therefore, the system's response to the detected situation will be delayed.

Undetected objects

ACC only detects vehicles moving in the same direction. The sensor does not detect:

- People
- Animals
- Parked vehicles
- Vehicles crossing or driving in the opposite direction
- Other stationary obstacles

For example, if a vehicle detected by the ACC turns or changes lanes, and if there is a parked vehicle in front, the ACC will not react to the parked vehicle → Fig. 102 [D].

Curves

The front radar sensor always performs straight-line measurements. Therefore, vehicles in sharp curves may be accidentally detected or vehicles in front may not be detected → Fig. 101 [A].

Vehicles out of sensor range

The ACC may not react or react improperly or with a delay in the following driving scenarios:

- Vehicles driving out of the sensor's range, close to the vehicle, such as motorcycles → Fig. 101 [B].
- Vehicles changing to the same lane of the vehicle, at a close distance → Fig. 102 [C].
- Vehicles with accessories protruding out of the vehicle.

⚠ WARNING

Using the ACC in these scenarios may lead to severe accidents and injuries, as well as potential traffic violations.

Turn ACC on and off

📖 Please refer to ⚠ at the start of the chapter on page 117.

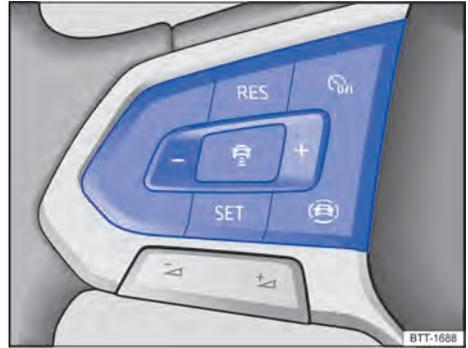


Fig. 103 Left side of the multifunction steering wheel: ACC operating (variant 1) buttons.



Fig. 104 Left side of the multifunction steering wheel: ACC operating (variant 2) buttons.

Turn on the ACC

- Press .

The ACC is not immediately activated; the indicator lamp corresponding to the current driving condition lights up in grey

Starting the cruise controlling

- Press  while driving forward.

The ACC stores the current speed and maintains the adjusted distance. If the current speed is out of the predefined speed range, the ACC adjusts the minimum speed (low-speed driving) or maximum speed (accelerated driving).

Depending on the driving situation, the following indicator lamps light up:

-  ACC operating.
-  No vehicle detected ahead.
-  Vehicle detected ahead.

Cancel operation

- Briefly press  or step on the brake pedal.

The indicator lamp  lights up in grey; the speed and distance remain stored.

If ASR is disabled, ACC regulation is automatically cancelled.

Resume operation

- Press .

The ACC resumes the last stored speed and distance. The instrument cluster display shows the stored speed; the indicator lamp corresponding to the driving situation lights up.

Turn off the ACC

- Press and hold  for a few seconds. The stored speed is deleted.

Switch to speed limiter

- Press the .
- Select the speed limiter on the instrument cluster display.

The ACC will turn off.

Adjust the ACC

 Please refer to  at the start of the chapter on page 117.



Fig. 105 On the instrument cluster display: adjust the distance (schematic view, the ACC will adjust).

Set distance

The distance can be set to five levels (very short to very long):

- Press  and then select  or .
- Alternatively, press  repeatedly until reaching the desired distance.

The instrument cluster display shows the set distance → Fig. 105 . Follow specific minimum distance requirements.

- ◀ When the ACC does not operate, the set distance and vehicle are not highlighted in the instrument cluster display.

Set speed

The stored speed can be set within the predefined speed range using the multifunction steering wheel buttons, as shown below:

-  + 1 km/h, only while ACC is on
-  - 1 km/h, only while ACC is on
-  + 10 km/h
-  - 10 km/h

To continuously alter the set speed, keep the respective button.

Adjust regulation behaviour

It is possible to influence how dynamically the ACC regulates:

- Vehicles with driving profile selection: ▶

Configure the desired driving profile.

– *Vehicles without driving profile selection:*

Set the desired driving program in the Infotainment system assistant menu.

WARNING

ACC cannot correctly recognize all driving situations. There will be a risk of accident if the minimum distance from the vehicle travelling ahead is reached or if the difference between the speed of the vehicle travelling ahead and the vehicle is so great that a speed reduction by the ACC alone is insufficient. This can cause serious injury and even death.

- Be ready at any time to brake the vehicle autonomously.
- To cancel speed and distance control, step on the accelerator pedal. In this case, the ACC does not brake autonomously.
- Always follow minimum distance requirements in the respective country.
- Always set a greater distance limit in case of rain, snow or poor visibility.

 Some settings may be saved in custom user accounts and, therefore, change automatically whenever the user account is changed.

Troubleshooting

 Please refer to  at the start of the chapter on page 117.

ACC not available

A Pictogram is shown on the display

- The radar sensor is dirty. Clean the radar sensor → page 262.
- Radar sensor visibility may be compromised due to weather conditions (e.g. snow), or detergent residue. Clean the radar sensor → page 262
- Radar sensor visibility compromised by attached pieces, decorative trims and license plate supports or stickers. Keep the area around the radar sensor unobstructed.
- Radar sensor is maladjusted or damaged (e.g. due to front end damage). Check for damages → page 271.

- Damages or faults. Turn the engine off and back on.
- Paintwork or structural changes were made to the front-end of the vehicle.
- The original Volkswagen logo is not being used.
- Seek assistance from a Volkswagen Dealership if necessary.

ACC not working as expected

- The radar sensor is dirty. Clean the radar sensor → page 262.
- The system's limits are maintained → page 118.
- Brakes are overheated; regulation was automatically interrupted. Wait until the brakes cool down and check operation.
- Seek assistance from a Volkswagen Dealership if necessary.

Unable to start ACC

Ensure the following premises are met:

- Selector lever in **D/S** position or Tiptronic selector course.
- Brake lights working.
- ESC not regulating.
- Brake pedal not working.

Unusual noises during automatic braking

- These may occur and do not indicate system malfunction.

Front Assist

Introduction

Emergency braking assistant (Front Assist) can detect imminent frontal collisions and warn against them. Additionally, the system can assist with braking and initiate automatic braking.

Depending on the vehicle version, the Front Assist system may not be available.

Front Assist can help avoid accidents; however, it does not replace the driver's attention.

Front Assist works exclusively within system limits. Alert moments vary depending on the traffic situation and the driver's behaviour.

Functional scope

Front Assist includes the following extended functions, depending on version and country:

- Pedestrian detector.
- Cyclist detector.

The mentioned functions are automatically activated when Front Assist is switched on.

Identifiable objects

Front Assist can recognize the following objects, depending on country and version:

- vehicles.
- two-wheeled vehicles.
- pedestrians.

Driving with Front Assist

You can stop automatic braking interventions by driving or pressing the accelerator pedal.

Automatic braking procedure

Front Assist can slow the vehicle to a stop. However, the vehicle is not kept parked after that. Step on the brake pedal!

During an automatic braking procedure, the brake pedal becomes a little harder.

WARNING

Front Assist does not replace the driver's attention and operates exclusively within the limits of the system. Front Assist does not recognize all driving situations and may not react, react late or react undesirably. In case of carelessness or lack of attention, there is a risk of accidents and serious injuries or even death.

- Always remain alert and do not rely solely on the system. The driver is responsible for all driving tasks at all times.
- Observe system limits → page 123.
- Adapt your speed and distance from the vehicles ahead to suit visibility, weather, road and traffic conditions.
- Consider canceling automatic Front Assist interventions if necessary.

- Depending on traffic conditions, brake immediately or swerve away from obstacles as soon as warned by the Front Assist system.
- If you are unsure about the functions included in the vehicle depending on the version and country, before starting to drive, consult a specialized and qualified company on the subject. Volkswagen recommends seeking out a Volkswagen Dealership.

Alert and braking intervention levels

 Please refer to  at the start of the chapter on page 122.

Speed ranges

In these speed ranges, Front Assist provides maximum assistance:

- Reaction to vehicles: approximately 5 km/h (approximately 3 mph) to approximately 250 km/h (approximately 155 mph).
- Reaction to pedestrians: approximately 5 km/h (approximately 3 mph) to approximately 85 km/h (approximately 53 mph).
- Reaction to two-wheeled vehicles: from approximately 5 km/h (approximately 3 mph) to approximately 250 km/h (approximately 155 mph).

Support can cover initial warning, critical alert, as well as automatic braking and braking intervention. A distance alert may also be displayed.

Influencing factors

Whether and in what speed range Front Assist reacts to the mentioned objects depends on the following factors:

- object type.
- direction of movement of the object.
- speed of the object.
- vehicle speed.

The operating area of Front Assist may therefore be restricted if the vehicle approaches an object too quickly and there is little time to react. 

Furthermore, not all alert levels are covered in all situations. Depending on the speed, there is, for example, no initial warning or critical alert, but rather automatic braking to protect the detected object as best as possible.

Distance warning



Front Assist detects whenever there is a safety threat due to excessively near driving. The indicator lamp lights up. Increase distance!

Initial warning



Front Assist warns of a possible collision and prepares the vehicle for a possible emergency braking procedure. A sound warning is heard and a red warning lamp lights up. Brake or swerve!

Critical warning

If you do not react to the initial warning, a brief brake bump may occur to warn the driver of the increasing risk of collision. Brake or swerve!

Automatic braking

Front Assist can automatically brake the vehicle by increasing braking force at various levels. Decreasing the speed may mitigate the consequences of a potential accident.

Braking intervention

If the system detects that you are not braking enough in case of an imminent collision, Front Assist may increase the braking power to help avoid a collision. Braking intervention only occurs as long as you press the brake pedal firmly.

Front Assist system limits

 Please refer to  at the start of the chapter on page 122.

Sensor limits

Front Assist recognizes driving conditions using a radar sensor located in the front of the vehicle. The radar sensor's range is approximately 120 m (about 400 feet).

After vehicle start



Immediately after starting the vehicle, the Front Assist system is not available or is available in a limited manner. During this period, the white indicator lamp remains lit on the instrument cluster display.

Non-detectable objects

Front Assist may not react or may react delayed to the following objects:

- Vehicles crossing or in the opposite direction.
- Pedestrians standing or approaching; Without pedestrian detector, there is generally no reaction to people.
- Cyclists stopped or approaching; Without a cyclist detector, there is no reaction to cyclists at intersections.
- Pedestrians and cyclists who cannot be detected as such, because they are, for example, fully or partially covered.

Operating limitations

In addition to the situations mentioned regarding sensor limits, in the following situations, Front Assist may not react, react late or in an undesired way, among others:

- Reverse gear.
- If the ASR is manually turned off.
- If the ESC is regulating.
- If multiple brake lights are malfunctioning.
- If several brake lights are faulty on the electrically connected tow.
- If the vehicle is suddenly accelerated or if the accelerator pedal is fully pressed.
- In unpredictable driving scenarios (e.g. vehicles in the front suddenly braking or swerving).
- If the Front Assist system is malfunctioning.

Turn off Front Assist

For systemic reasons, Front Assist use is not adequate in the following driving scenarios and the system must be turned off → :

- When not driving in public roads (e.g. dirt roads or tracks).
- If the vehicle is towed or hauled.
- If accessories are covering the radar sensor (e.g. additional headlights).
- If the radar sensor is defective.

- After force has been exerted on components in the area of the radar sensor, for example after a rear-end collision accident.
- In case of repeated unwanted activations.

WARNING

If Front Assist is used in the aforementioned situations, accidents and serious or even fatal injuries may occur.

- Turn off Front Assist in the mentioned situations.

 Observe the radar sensor limits → page 113.
Always be attentive and, if necessary, intervene directly!

Operate the peripheral monitoring system

 Please refer to  at the start of the chapter on page 122.

After turning on the ignition, the Front Assist and the initial warning function (depending on the country) are automatically activated.

 However, as long as the white control light is on, Front Assist is only available to a limited extent or not at all.

Volkswagen recommends always keeping the Front Assist system and the distance warning and initial warning functions enabled, except → page 123, *Front Assist system limits*.

Turn on and off

You can manually turn Front Assist on and off and view the activation status.

On the instrument cluster display:

1. Press the  button .
2. Turn Front Assist on or off.

On Infotainment system:

1. Open the wizards menu. .
2. Switch Front Assist on or off in the corresponding submenu.

 When you turn off Front Assist, distance alert and advance warning are also automatically turned off. The yellow indicator lamp lights up on the instrument cluster display.

Adjust distance warning and initial warning feature

If Front Assist is switched on, you can make the following settings in the Infotainment system assistant menu, depending on version and country:

- Turn the distance alert on and off.
- Turn initial warning on and off.
- Adjust the timing of initial warning.
- *Depending on vehicle version and radio version*, turn the desired feature on or off in the radio system's vehicle settings: touch the selection button  and the  → page 26 function button.

Depending on the version, it is also possible to set the initial warning time.

 Some settings may be saved in custom user accounts and, therefore, change automatically whenever the user account is changed.

 Depending on the version, the  button is located on the multifunction steering wheel or on the turn signal and high beam lever.

 Some settings may be saved in custom user accounts and, therefore, change automatically whenever the user account is changed. 

Troubleshooting

 Please refer to  at the start of the chapter on page 122.

Front Assist starts

White indicator lamp lights up.

- Front Assist system unavailable or limited. After driving forward for some time, Front Assist becomes available and the indicator light goes out. If the vehicle is not driven, the indicator lamp remains on. 

Front Assist not available, insufficient radar sensor visibility

- The front radar sensor is dirty. Clean the front radar sensor → page 262.
- Front radar sensor visibility may be compromised due to weather conditions (e.g. snow), or detergent residue. Clean the radar sensor → page 262.
- Front radar sensor visibility compromised by attached pieces, decorative trims and license plate supports or stickers. Keep the area around the radar sensor unobstructed. → page 271.
- Radar sensor is maladjusted or damaged (e.g. due to front end damage). Check for visible damages → page 271.
- Paintwork or structural changes were made to the front-end of the vehicle.
- The original Volkswagen logo is not being used. Volkswagen recommends the use of original Volkswagen parts and Original Volkswagen Accessories, which can be purchased from your Volkswagen Dealership.
- If the problem persists, turn off Front Assist and look for a specialized and qualified company. Volkswagen recommends seeking out a Volkswagen Dealership.

Front Assist not working as expected or performing several unwanted interventions

- The front radar sensor is dirty. Clean the radar sensor → page 262.
- The system's limits are maintained → page 123.
- If the problem persists, turn off Front Assist and look for a specialized and qualified company. Volkswagen recommends seeking out a Volkswagen Dealership.

Adverse conditions:

The electronic stability program (ESC) may not identify very steep slopes (over 30%). This circumstance may affect the regular operation of the electronic stability program (ESC) and consequently the hill assist system (HHC - Hill Hold Control), emergency braking assistant (Front Assist) and parking sensor.

To restore the aforementioned systems, it is sufficient that the vehicle is turned off and on again and that the driver starts the car and drives it at a speed greater than 25 km/h for a few seconds. <

Lane keeping assist (Lane Assist)

Introduction

Lane Assist helps the driver, within the system limits, to stay in the lane. The function is not suitable and is not prepared to maintain the lane on its own.

If the vehicle approaches too close to a detected lane boundary line, Lane Assist will alert the driver with corrective steering intervention. Steering correction intervention can be taken over by the driver at any time.

Speed range

If the traffic lane line is recognized, Lane Assist is ready to regulate within the system limits from approximately 60 km/h (approximately 35 mph) (system status active).

⚠ DANGER

Lane Assist cannot replace the driver's attention and operates exclusively within the limits of the system. Lane Assist cannot recognize all driving situations and may not react, react late or react undesirably. If you are careless, there is a risk of accidents and serious injuries or even death.

- Always remain vigilant and do not rely solely on the system. The driver is always responsible for maintaining the lane.
- Observe system limits → page 126.
- Adapt your speed and distance from the vehicles ahead to suit visibility, weather, road and traffic conditions.
- Always keep your hands on the steering wheel to be ready to manoeuvre at any time.
- Immediately counteract unwanted system intervention by turning the steering wheel.
- Observe the indications on the instrument cluster display and follow the corresponding instructions if the traffic situation permits. <

Lane Assist system limits

📖 Please refer to ⚠️ at the start of the chapter on page 125.

Limits of the sensor system

Lane Assist recognizes road lane marking using the camera behind the windscreen.

Unrecognized or incorrectly recognized road lane marking

Lane Assist does not correctly recognize all road lane marking. If road lane markings are not recognized or are incorrectly recognized as such, a failure in the assistance control or unwanted interventions by Lane Assist may occur. In addition to the situations mentioned in the camera limits, this may occur in the following situations, among others:

- If there are no road lane markings.
- In case of very dynamic driving.
- Off roads or highways in good condition.
- On bad tracks, track structures or objects.
- In the case of reflections and dazzling effects.

Always be attentive, intervene yourself if necessary and cancel any unwanted intervention by the system immediately. Temporarily turn off Lane Assist if necessary.

Lane Assist is not ready to control

Lane Assist is not ready to control under the following conditions (passive system status):

- The electronic stability program (ESC) is turned off or ESC Sport is active.
- The driving speed is less than approximately 60 km/h (about 35 mph) or more than approximately 215 km/h (about 135 mph).
- Lane Assist did not recognize any road lane markings.
- In the case of very narrow lanes and sharp curves.
- Temporarily, in case of very dynamic driving.
- If the driver cancels a system intervention.
- In the event of intervention by the emergency braking assistant (Front Assist).

In the following situations, Lane Assist is not ready to control on at least one side:

- With the turn signal lights on, in the direction of the planned lane change.
- Inside a curve that you deliberately drive into.

🚦 Observe the limits of the camera. Always be attentive and intervene yourself if necessary!

Driving with Lane Assist

📖 Please refer to ⚠️ at the start of the chapter on page 125.

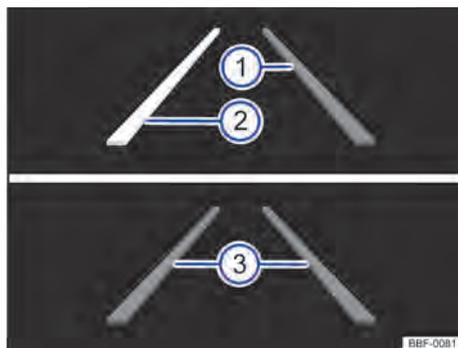


Fig. 106 On the instrument cluster: lane keeping assistant display indicators.

Turn on and off

Depending on the country, after switching on the ignition, Lane Assist always remains activated. You can also manually turn Lane Assist on and off and view the current status.

On the instrument cluster display:

- ① Press the  button.
- ② Turn Lane Assist on or off.

On Infotainment system:

- ① Open the wizards menu.
- ② Turn the “Blind Spot” Monitor on or off in the corresponding submenu.

🚦 If you switch off Lane Assist, the yellow indicator lamp will come on in the instrument cluster, depending on the country. ▶

- ① Road lane marking detected. The system is ready to control on the represented side.
 - ② Road lane marking detected. The system controls in an auxiliary way on the represented side.
-
- ③ The system is not ready to control on the represented side.

Depending on the driving situation, one of the following warning lights comes on in the instrument cluster:

-  System active and ready to control on at least one side.
-  The system takes control on the side represented (corrective steering intervention).

If no indicator lamps come on, Lane Assist is not ready to control on both sides (passive system status) or is switched off.

Driver intervention prompt

In the absence of driving activity, Lane Assist will prompt you, via a display on the instrument cluster display and audible alerts, to drive in the middle of your own lane.

If you don't react to this, Lane Assist will switch to passive.

Regardless of steering activity, if the corrective steering intervention lasts longer, a display on the instrument cluster display and audible alerts prompt you to drive in the middle of your own lane.

Steering wheel vibration

The following situation may cause the steering wheel to vibrate:

- During heavy steering intervention, the system can no longer recognize any lane.

Additionally, you can select the **Vibration** or **Steering wheel vibration** option in the Infotainment system assistant menu. In this case, crossing a road lane marking with Lane Assist active produces a vibration in the steering wheel.

-  Depending on the version, the button is located on the multifunction steering wheel or on the turn signal and high beam lever.

Troubleshooting

 Please refer to  at the start of the chapter on page 125.

Fault message, Lane Assist unavailable

A indicator lamp will be lit in the instrument cluster. A message will also be shown on the instrument cluster display.

- The camera's field of view is dirty. Clean the windscreen.
- The camera's visibility is compromised by weather conditions, for example snow, or by residues of detergent or coatings. Clean the windscreen.
- Camera visibility is compromised by attached parts or adhesives. Keep the area around the camera's field of view clear
- The camera is out of adjustment or damaged, for example due to damage to the windscreen. Check for damages.
- The camera has automatically turned off due to high ambient temperature or long periods of direct sunlight. If the camera is available again, Lane Assist will also be available again. Turn the engine off and back on.
- Damages or faults. Turn the engine off and back on.
- If the problem persists, look for a suitably qualified workshop. Volkswagen recommends seeking out a Volkswagen Dealership.

The system behaves differently than expected

- Do not add objects to the steering wheel.

 After turning on the ignition, it may take a few seconds to detect a fault in the system. 

Semi-automated driving assistance (Travel Assist)

Introduction

With the help of the driving assistant (Travel Assist), the vehicle can maintain the distance selected by the driver from the vehicle in front within the system limits and remain in the preferred position in the lane (adaptive lane guidance).

Depending on the vehicle version, the Semi-automated driving assistant (Travel Assist) may not be available.

Is the vehicle equipped with Travel Assist?

The vehicle is equipped with Travel Assist if the button  is available on the multifunction steering wheel.

Speed range

You can set a speed between 20 km/h and 210 km/h. This speed range may vary by country.

Travel Assist system limits

Travel Assist recognises driving situations using the same sensor system as Automatic Cruise Control (ACC) and Lane Assist.

Driving with Travel Assist

Travel Assist automatically controls the speed and steers the vehicle. In addition, within the system limits and depending on the version, Travel Assist can slow the vehicle to a stop when it is behind a stopping vehicle and then pull away again by itself.

You can deactivate the control carried out by Travel Assist at any time.

Display indicators

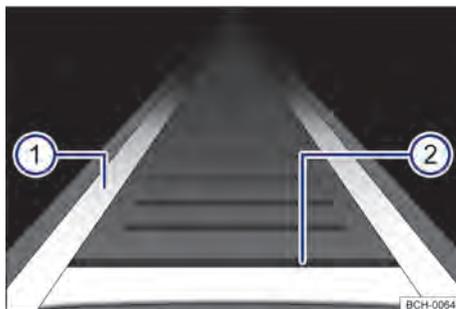


Fig. 107 In the instrument cluster display: indicator during active control.

- ① Adaptive lane guidance active.
- ② Travel distance controlled; no vehicle ahead detected.

Depending on the version, an additional indicator is displayed in the head-up display.

Depending on the version, the indicator lights in the instrument cluster display indicate the status of Travel Assist:

-  Travel Assist active, automatic distance control and adaptive lane guidance active.
-  Travel Assist passive, automatic distance control active, adaptive lane guidance passive.
-  Travel Assist disabled, not controlling.

Driver intervention prompt

When you take your hand off the steering wheel, after a few seconds the system will prompt you to actively take over driving by issuing an indication on the instrument cluster display and audible alerts.

- ◀ Additionally, depending on the version, the driver's seat belt is briefly tensioned.

If you do not react to this, Travel Assist will be deactivated.

Alternatively, Emergency Assist will be activated, depending on the version. If Emergency Assist is not available, Travel Assist will be deactivated. ▶

⚠ WARNING

Travel Assist cannot replace the driver's attention and operates exclusively within the limits of the system. Travel Assist cannot recognize all driving situations and may not react, react late or react undesirably. If you are distracted, there is a risk of accidents and serious injuries or even death.

- Always remain alert and do not rely exclusively on the system. The driver is always responsible for all driving tasks.
- Please observe the ACC → page 118 and → page 125 system limits.
- Adapt your speed and distance from the vehicles ahead to suit visibility, weather, road and traffic conditions.
- Always keep your hands on the steering wheel to be ready to manoeuvre at any time.
- Immediately take control of the vehicle if a driver intervention request appears on the instrument cluster display or if speed reduction via Travel Assist is insufficient.
- Brake if the vehicle moves unintentionally, for example, after a request for intervention from the driver.

Operate Travel Assist



Fig. 108 Left-hand side of the multifunction steering wheel.

Start activation and control

- 1 While driving forward with ACC on, press button  on the multifunction steering wheel. The vehicle switches from ACC to Travel Assist.

Depending on the driving situation, the vehicle switches to the following system statuses in Travel Assist:

- If ACC is controlling, Travel Assist maintains the current speed and the preset distance to the vehicle in front (passive system status). If lane markings are detected, the vehicle is simultaneously kept in the lane by steering wheel movements (active system status).
- If ACC is not controlling, Travel Assist is switched on but remains deactivated.

- 1 Press the button .

Travel Assist switches to active or passive system status depending on the driving situation.

The indicator light corresponding to the driving situation lights up in the instrument cluster display. A message is also displayed.

Interrupt control

- 1 Briefly press the button .

Or: step on the brake pedal.

The set distance is saved.

Switching to ACC

- 1 Press the button  on the multifunction steering wheel. The vehicle switches from Travel Assist to the system status corresponding to the ACC driving situation.

Making other settings

Otherwise, the way to operate Travel Assist is the same as ACC → page 120

Troubleshooting

Travel Assist is not available or does not work as expected

The yellow indicator lamp must light up. A message will also be shown on the instrument cluster display.

- There is a fault with the sensors. Check the causes and remedial measures described in the information on ACC or Lane Assist.
- Damages or faults. Turn the engine off and back on.

- System limits are not respected.
- If the problem persists, look for a suitably qualified workshop. Volkswagen recommends seeking out a Volkswagen Dealership.

Take over the steering

The warning light comes on white and a message appears in the instrument cluster display.

You have taken your hands off the steering wheel for a few seconds.

- 1 Hold the steering wheel and take over driving.

Take over the steering

The warning light comes on red and a message appears in the instrument cluster display. Depending on the driving situation, an audible warning sounds or the steering wheel vibrates.

You have taken your hands off the steering wheel for an extended period of time or the system limits have been reached.

- 1 Immediately hold the steering wheel and take over driving.

Travel Assist switches off automatically

- You have taken your hands off the steering wheel for an extended period of time.
- Damages or faults. Turn the engine off and back on.
- If the problem persists, look for a suitably qualified workshop. Volkswagen recommends seeking out a Volkswagen Dealership.

Control is interrupted unexpectedly

- You have activated the turn signals.

“Blind spot sensor” (Blind Spot / Side Assist)

Introduction

The Blind Spot Monitor helps the driver to detect the traffic situation behind the vehicle.

Radar sensors behind the rear bumper cover monitor the area behind the vehicle. The system measures the distance and speed difference to the other vehicle and informs the driver through optical signals on the exterior mirror.

The Blind Spot Monitor should only be used on paved roads.

Speed range

When the “Blind Spot” Monitor is on, it is activated from approximately 15 km/h (about 9 mph).

WARNING

The “Blind Spot” Monitor does not replace the driver's attention, and works exclusively within the system limits. The Blind Spot Monitor may not detect all driving situations and all objects in the vicinity, meaning it may not react, react late or in an undesired way. If you are not careful, there is a risk of accidents and serious injuries, including fatalities.

- Always remain alert and do not rely exclusively on the system. The driver is always responsible for all driving tasks and changing lanes.
- Observe system limits → page 130
- Adapt your speed and distance from the vehicles ahead to suit visibility, weather, road and traffic conditions.
- Always keep your hands on the steering wheel so you are ready to take the wheel at any time.
- Observe indications on the exterior mirrors and on the instrument cluster display and act as requested.

Sensor system limits of “blind spot”

 Please refer to  at the start of the chapter on page 130.

Sensor limits

The “Blind Spot” Monitor detects driving situations with the help of radar sensors in the rear area.

Operating limitations

The "Blind Spot" Monitor may, among other things, not correctly interpret the traffic situation in the following driving situations:

- When driving in the middle of two lanes.
- On roadways of different widths.
- In subdivisions with special margins, for example, high or displaced guardrails.

Limited visibility

In the event of solar radiation, the visibility of the control light in the exterior rear-view mirror glass may be reduced.

 Observe the limits of the radar sensors and always be alert!

Driving with "blind spot" monitor

 Please refer to  at the start of the chapter on page 130.



Fig. 109 On the exterior mirrors: Blind Spot Monitor indicator.

Turn on and off

You can view the current status of the "Blind Spot" Monitor in the instrument cluster display and in the infotainment system. There, you can also turn the "Blind Spot" Monitor on and off.

On the instrument cluster display:

- ① Press the  button.
- ② Turn the "Blind Spot" Monitor (Blind spot/Side Assist) on or off in the corresponding .

On Infotainment system:

- ① Open the wizards menu.
- ② Turn the "Blind Spot" Monitor on or off in the corresponding submenu.

As soon as the "Blind Spot" Monitor is ready for use, the indicator lamp  illuminates briefly once in the exterior mirror glass.

Automatic deactivation

If you use the factory-installed towing device and have established the necessary electrical connection, the "Blind Spot" Monitor will be switched off automatically. As soon as a trailer is electrically connected to the vehicle, and the driver starts the vehicle, a text message appears on the instrument cluster display that the "Blind Spot" Monitor is deactivated. After disconnecting the electrical connection, the "Blind Spot" Monitor will automatically switch on again.

If the towing devices are not factory installed, you must manually turn the "Blind Spot" Monitor off and on.

Indicators on exterior mirror

-  Flashing: a vehicle was detected in the blind spot and the turn signals were also activated in the direction of the detected vehicle.
-  On: Your own vehicle is being overtaken or you are overtaking another vehicle with a difference of up to approximately 10 km/h (about 6 mph). When overtaking significantly faster, the indicator is not displayed.

The faster another vehicle is approaching, the sooner an indication will occur in the exterior mirror glass.

"Blind spot" Monitor "Plus"

In the case of vehicles with Lane Assist, when Lane Assist is activated ("Blind Spot" Monitor "Plus"), the yellow warning light  flashes in the instrument cluster display even without activating the turn signal lights when leaving the driving lane. In the event of a possible situation (information level, warning level), you are warned by means of a corrective steering intervention. The steering intervention occurs even if the turn signal is switched on for the respective direction. If the driver cancels the corrective steering intervention, an additional warning is given by means of a vibration of the steering wheel. In this case, 

the steering wheel vibration must be activated in the vehicle settings in the Infotainment system. To do this, the steering wheel vibration must be activated in the assistant menu of the Infotainment system.

 If there is a system failure, the "Blind Spot" Monitor may automatically turn off. 

- The visibility of radar sensors is compromised by attached parts, bicycle carrier systems or adhesives. Keep the area around the radar sensors unobstructed .
- Painting services were carried out in the area of the radar sensors, on the rear of the vehicle or on the chassis → page 270.
- The side windows were subsequently coated with tinting films → page 270.
- If the problem persists, look for a suitably qualified workshop. Volkswagen recommends seeking out a Volkswagen Dealership.

 The system will only be available again when the ignition has been turned off and on again and the Blind Spot Monitor has been turned on. 

Troubleshooting

 Please refer to  at the start of the chapter on page 130.

Faulty "blind spot" sensor

Damages or faults. The indicator lamp in the instrument cluster display lights up yellow.

- ① Damages or faults. Turn the engine off and back on.
- ② If the problem persists, look for a suitably qualified workshop. Volkswagen recommends seeking out a Volkswagen Dealership.

Sensor without visibility, malfunction warning, the system turns off

- Clean the radar sensors and remove stickers or accessories from the radar sensors or bumper → page 262.
- Check whether damage is detectable.
- Clean the radar sensors and remove stickers or accessories from the radar sensors
- If the problem persists, look for a suitably qualified workshop. Volkswagen recommends seeking out a Volkswagen Dealership.

The system behaves differently than expected

- The radar sensors are dirty. Clean the radar sensors → page 262.
- The radar sensors are covered in water.
- Visibility of the radar sensors is compromised by weather conditions, e.g. snow, detergent residue or layer formation. Clean the radar sensors → page 262.
- The system's limits are maintained → page 130.
- The vehicle is damaged in the area of the radar sensors, for example through minor collisions during parking. Check whether damage can be recognized.

Parking and manoeuvring

Parking

Stopping the vehicle

Always park the vehicle in the indicated sequence.

Park the vehicle always on a level and stable surface → .

- Stopping the vehicle. With a manual gearbox, press the clutch pedal *fully* down.
- Depress and hold the brake pedal until the engine has stopped.
- With an *automatic gearbox*, move the selector lever to position **P**.
- Lift the handbrake lever up → page 134.
- Turn off the engine → page 101. The  indicator lamp on the instrument cluster should be lit up in *red*.
- Remove the key from the ignition.
- In vehicles with manual gearbox, select 1st gear for flat ground and uphill inclines, or reverse gear for downhill inclines, and then release the clutch.
- Let go off the brake pedal.
- Ensure that all occupants, particularly children, have left the vehicle.
- Take all vehicle keys with you when you leave the vehicle.
- Lock the vehicle.

Parking on uphill and downhill slopes

Before switching off the engine, turn the steering wheel so that the front wheels will roll against the kerb if the parked vehicle starts to move.

- When facing downhill, turn the wheels so that they face the kerb.
- When facing uphill, turn the wheels so that they face the centre of the road.

WARNING

The components of the exhaust system become very hot. This can cause fires and serious injuries.

- Never park the vehicle so that parts of the exhaust system can come into contact with inflammable material underneath the vehicle, e.g. leaves, dry grass, spilled fuel, etc.

WARNING

Leaving and parking the vehicle incorrectly may cause the vehicle to move. This could lead to accidents and severe injuries.

- Ensure that the handbrake is correctly engaged.
- Never remove the vehicle key from the ignition cylinder while the vehicle is in motion.
- Always take all vehicle keys with you when you leave the vehicle. The engine can be started and electrical equipment such as the window controls can be operated, which may lead to severe injuries.
- Never leave unattended children or people with special needs in the vehicle. They could become trapped in the vehicle in an emergency and may not be able to get themselves to safety. Depending on the time of year, for example, locked vehicles can be subjected to very high or very low temperatures. This can cause serious injuries and illness or fatalities, especially to small children.

NOTICE

- Only release the brake pedal after pulling the handbrake, in order to prevent sudden vehicle movement after parking.
- Drive carefully in parking lots with long kerbs or fixed posts. Objects higher than the ground level may damage the bumper and other vehicle parts when parking. On order to avoid any damage, stop the vehicle before the wheels touch the bollards or kerbs.
- Carefully drive through entrances and slumps in terrains, ramps, kerbs, and other objects. Lowered vehicle parts, such as the bumper, spoiler and chassis, engine or exhaust parts may be damaged in these situations.



Please adhere to relevant legislation when stopping and parking your vehicle.



Handbrake

Engaging the handbrake

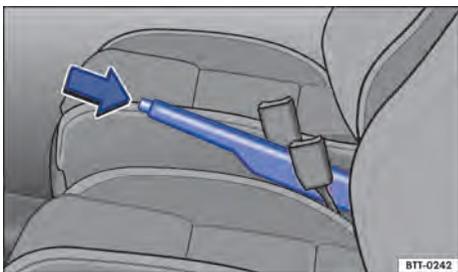


Fig. 110 Between front seats: handbrake lever.

Always pull the handbrake lever when leaving or parking the vehicle.

Applying the handbrake

- Press the interlock button and pull the handbrake lever upwards → [Fig. 110](#) (arrow).

The handbrake is engaged when the  indicator lamp, with switched on ignition, lights up on the instrument cluster.

Releasing the handbrake

- Pull the handbrake lever slightly upwards and press the interlock button → [Fig. 110](#) (arrow).
- Guide the handbrake lever down while pressing down the interlock button.

WARNING

Incorrect use of the handbrake can cause severe accidents and injuries.

- The handbrake should never be used to brake the vehicle, except in emergencies. The braking distance is considerably longer as only the rear wheels are braked. Always use the foot brakes.
- Never drive with the handbrake lever slightly pulled. This could overheat the brake and compromise the braking system. In addition, this causes premature wearing of rear brake pads.
- Never drive the vehicle with the handbrake lightly applied. The vehicle can move even while the handbrake is applied.

NOTICE

Only release the brake pedal after pulling the handbrake, in order to prevent sudden vehicle movement after parking.

Parking systems safety instructions

The following are parking systems:

- Park Distance Control → page 135.
- Rearview camera system → page 137

Which of the listed systems is installed will depend on the version of the vehicle.

Limits of parking systems

Objects such as thin poles and bars, fences, trees, very low or high obstacles as well as open or opening boot lids may not be detected by the sensors or cameras.

In some cases dirt or ice covering the sensors or cameras may be taken for an obstacle.

Limits of the reverse camera

The rear view camera only shows two-dimensional images on the display. Due to the absence of image depth, protruding objects or recesses in the road may be difficult to identify or not be identifiable at all.

The orientation lines are superimposed on the image regardless of the surroundings of the vehicle, there is no automatic identification of objects. The driver is responsible for the assessment of whether the vehicle fits or not into the parking space.

WARNING

The intelligent technology shipped with the parking systems cannot go beyond the limits imposed by physics and will only operate within the limitations of the system. The increased convenience provided by the parking assist systems must not let you ignore a risk situation. The parking assist systems cannot replace the driver's full attention.

- Adapt your speed and driving style to suit visibility, weather, road and traffic conditions.

- Unsupervised vehicle movements may cause severe injuries.
- Always keep in mind the parking direction and the relevant areas around the vehicle.
- Do not let your attention be deviated from the surrounding traffic by the images displayed on the instrument cluster display or on the radio system.
- Always keep your attention on the surroundings of the vehicle as small children, animals and objects are not always detected by the parking systems.
- The parking systems have blind spots in which obstacles and people cannot be detected.
- External acoustic sources and certain object surfaces and clothing may influence the sensor signals. Under certain circumstances people and objects may not be detected or mistakenly detected.
- Due to the display's resolution and in conditions of insufficient lighting, certain objects, such as thin posts or fences, may not be displayed at all or only partially so.
- The signals and indications of the parking systems demand a reaction time with a too fast approximation may not be sufficient to emit a warning.

 Volkswagen recommends practicing the use of the parking distance control in a low-traffic area or a parking lot to get properly acquainted with the system's quirks.

Park distance control (Park Pilot)

Introduction

The park distance control system assists the driver with parking and manoeuvring.

According to the vehicle version, the park distance control system may not be available.

By way of sensors in the front and rear bumper the parking assist determines the distance of an obstacle from the vehicle → page 6. The system indicates on the radio system through acoustic signals when there is an obstacle in the sensors' detection range.

System limitations

Objects such as towing bars, thin poles and bars, fences, trees, very low or high obstacles as well as open or opening boot lids may not be detected by the sensors.

In some cases dirt or ice covering the sensors may be taken for an obstacle.

Enabling and disabling



Fig. 111 On the centre console or on the radio display again: button to enable and disable the park distance control (according to the vehicle version).

◁ Depending on the model and version of the vehicle or radio, the button to enable and disable park distance control may not be available.

Enabling the park distance control

- Selecting reverse gear.
- **OR:** on the radio, touch the function button .

The park distance control is automatically enabled when the vehicle moves in reverse gear.

According to the vehicle version, the park distance control system may also be enabled automatically.

Disabling the Park Distance Control

- On the radio, touch the function button .
- **OR:** accelerate the vehicle forward at a speed higher than approximately 0 to -15 km/h.

Automatic enabling (version dependent)

The Park Distance Control is also enabled when the vehicle is driven at a speed of less than 15 km/h against an obstacle in the front area. Automatic activation can be enabled on the radio system.

The automatic activation only works when the approximate speed of 15 km/h is not reached is not reached for the first time. A new automatic activation is possible when the Park Distance Control is disabled and enabled again by means of the **[PWA]** button.

Further, the automatic activation can also be enabled again by switching the ignition off and on again.

Manoeuvre braking

When the vehicle is equipped with the manoeuvre braking function, the manoeuvre braking will activate an emergency braking as soon as an obstacle is detected ahead while driving in reverse gear. The purpose of the manoeuvre braking is to reduce the possibility of a front and rear collision.

The following requirements must be met for an automatic brake intervention:

- “active” manoeuvring braking function in the selection box, through the radio menu → page 26;
- The parking aid system is active when selecting reverse gear or when activating the park aid system through the **[PWA]** button, depending on the version of the vehicle;
- Speed must not exceed 10 km/h;

The automatic braking function is disabled in the following conditions:

- If the park assist system is activated automatically;
- For five metres after braking in the same direction, and active once again after changing gears.

Touch the **[PWA]** function pad on the radio menu to enable or disable the manoeuvre braking.

To operate the automatic braking function, the ultrasound sensors of the Park Assist system are used. Absolute collision prevention cannot be guaranteed by these ultrasound sensors.

Representation on the display

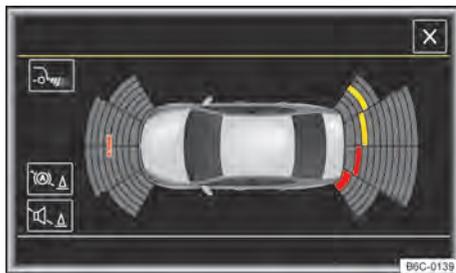


Fig. 112 Indication on the radio system: full screen mode. The detected areas depend on the vehicle version.

On the radio system the detected areas are represented by various segments → Fig. 112. The more the vehicle approaches an obstacle, the more the segment will also approach the illustrated vehicle. Simultaneously acoustic alarms are sounded.

- Nearby obstacle. A continuous acoustic sound is sounded. **Stop driving!**
- Obstacle in the way of the vehicle's course. An intermittent acoustic sound is sounded. The shorter the distance, the shorter the intervals between acoustic alarms.
- Obstacle out of the vehicle's course.
- 🔇 Muting the acoustic warnings.
- ⓐ A Enabling and disabling the manoeuvre braking (depends on the version).
- 📷 Switching to the rear view camera system (version dependent).
- !! System with malfunction in the surveyed area (version dependent).

Troubleshooting

Sensor without visibility, malfunction warning, the system turns off

In case of damage to a sensor, the detection range of the sensor is permanently turned off.

Malfunctions of the parking aid are displayed at first turning on by a text message with acoustic warning and the flashing of the warning lamp on the **[PWA]** button. When the sensors are dirty or covered, the corresponding group of sensors is

displayed on the Park Distance Control display exhibition. Furthermore a cleaning indication is displayed (version dependent).

- Clean the sensors or remove stickers or accessories from the sensors and from the rear view camera system → page 264.
- Check for damages.

The system behaves different from expected

Several causes are possible:

- The sensors are dirty → page 264. Apart from dirt and snow, the visibility of the sensor may also be compromised by cleaning products residues or linings.
- The system's prerequisites must be satisfied → page 135.
- The sensors are covered with water.
- The vehicle is damaged in the area of the sensors, for example by parking bumps.
- The sensors' viewing areas are obstructed by accessories such as bike support systems.
- Modifications to the paint in the vicinity of the sensors or constructive modifications have been made, for example, to the front or chassis of the vehicle.
- Noise sources, such as rough asphalt or cobblestone pavements interfere with the ultrasound signal.

Possible solutions

- Turn the system off temporarily.
- Check whether one of the mentioned possible causes matches the problem.
- After eliminating the source of the malfunction, the system can again be turned on.
- Should the system still behave in an unexpected fashion, have the system checked at a Volkswagen dealership.

Rear view camera system

Introduction

The rear view camera on the rear of the vehicle facilitates the driver's rear view and assists with the parking manoeuvre.

According to the version of the vehicle, the rear view camera system may not be available.

The rear view camera displays the area behind the vehicle on the radio system display screen. According to the mode, orientation lines support the rear view.

WARNING

The use of the cameras to assess the distance to obstacles (people, vehicles, etc.) is imprecise and may cause serious accidents and injuries.

- The camera lenses amplify and distort the field of vision making the displayed objects seem altered or imprecise.

Enabling and disabling

Please refer to  at the start of the chapter on page 137.

Enabling the rear view camera system

- Selecting reverse gear.
- **OR:** on the radio, touch the function button .

Disabling the rear view camera system

Drive forward at least 15 km/h.

Representation on the display

Please refer to  at the start of the chapter on page 137.

The image of the rear view camera system is displayed on the radio system.

The functions and representations depend on the version and may differ.

Settings

With the rear view camera system enabled, settings may be configured by means of the function touch pads. Some settings depend on the version.

Function touch pad surfaces and rear view camera system icons:

- X Exit current display.
-  Adjust the display: brightness, contrast, colour.
-  Switch to Park Distance Control → page 135.
-  Displays the Park Distance Control indicator,
-  Hides the Park Distance Control indicator,
-  Turning the Park Distance Control sound on and off.


Orientation lines

Red line: safe distance backwards

Green side-lines: vehicle extensions.

Parking

 Please refer to  at the start of the chapter on page 137.

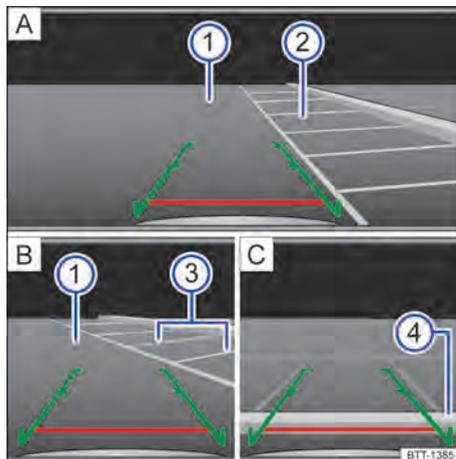

 **Fig. 113** Exhibition on the radio system display: parking with the rear view camera system.

Key for Fig. 113:

- A** Select parking spot.
- B** Parking in the selected parking spot.
- C** Line up vehicle to parking spot.
- 1** Lane.
- 2** Parking space.
- 3** Side limits of the parking space.
- 4** Rear limit of the parking space.

Entering the parking space

- Position the vehicle in front of the parking spot → Fig. 113  **A**.
- Selecting reverse gear.
- Drive slowly in reverse and manoeuvre so that the green side guides lead in between the delimiting lines of the selected parking space  **A**.
- Align the vehicle in the selected parking spot so that the green side guidelines are superimposed on the lateral limitation lines  **B**.
- Stop the vehicle when the red line hits the rear limit  **C**.

Assumptions

 Please refer to  at the start of the chapter on page 137.

To recognize a parking lot, the following assumptions must be satisfied:

- Not exceed **15 km/h**.
- Parking space width: **vehicle length + 0.2 m**.

For the display of a faultless image the following prerequisites must be satisfied:

- Closed boot lid.
- The surroundings correspond to a flat surface.
- The vehicle is not loaded in the back.

Troubleshooting

📖 Please refer to ⚠️ at the start of the chapter on page 137.

No camera image, malfunction warning, the system turns off

- Clean the camera lens or remove the stickers or accessories from the camera → page 264.
- Check for damages.

The system behaves different from expected

Several causes are possible:

- The camera is dirty → page 264. Apart from dirt and snow, the camera view may also be compromised by cleaning products residues or coatings.
- The system's prerequisites must be satisfied → page 138.
- The camera lens is covered by water.
- The vehicle is damaged in the area of the camera, for example by parking bumping.
- The camera's viewing areas are obstructed by accessories such as bike support systems.
- Modifications to the paint in the vicinity of the camera or constructive modifications have been made, for example, to the front or chassis of the vehicle.

Solution for all cases

- Turn the system off temporarily.
- Check whether one of the mentioned possible causes matches the problem.
- After eliminating the source of the malfunction, the system can again be turned on.
- Should the system still behave in an unexpected fashion, have the system checked at a Volkswagen dealership.

Park Assist

Introduction

The park assist system actively controls the vehicle's direction when parking and leaving a parking space.

Depending on the vehicle version, the parking steering assistant may not be available.

The park assist system is an extension of Park Distance Control → page 135.

The park assist system automatically controls the vehicle's direction. The driver must accelerate, switch gears and brake!

⚠️ WARNING

Sudden steering wheel movements may cause severe injuries.

- Do not touch the steering wheel during the manoeuvring procedure until prompted by the system.
- Exception: take over the steering wheel in case of danger.

ⓘ NOTICE

The park assist system is guided only by parked vehicles, curbs or other elements. Ensure the tyres and rims are not damaged when parking. If so, stop the parking process immediately to avoid vehicle damages.

Requisites

📖 Please refer to ⚠️ and ⓘ at the start of the chapter on page 139.

To park and leave a parking space, the following requirements must be met:

- Traction control (TCS) must be on → page 144.
- Distance: **0.5-1.5 m** when passing next to the parking spot.

- The parking space must be of a minimum size required to use the park assist system. Longitudinal spaces for line parking: vehicle length + 80 cm. Traversing spaces for side-by-side parking: vehicle width + 70 cm
- Speed when passing next to the parking spot (lined spots): **40 km** at most.
- Speed when passing next to the parking spot (side-by-side spots): **20 km** at most.
- Speed when parking: **7 km** at most. An automatic brake intervention may occur during parking manoeuvres.

After the automatic brake intervention, it is possible to resume the parking manoeuvre.

Automatic interventions only occur for each displacement made during parking manoeuvres. If a speed of approximately 7 km/h (4 mph) is exceeded, the manoeuvre is interrupted.

Automatic interruption of parking manoeuvre

The park assist system interrupts the parking manoeuvre in the following cases:

- Press **Pa** **OR** touch the selection surface **Pa** on the radio display.
- The driver holds the steering wheel.
- The driver door is opened.
- The parking manoeuvre does not complete the course of approximately 6 minutes.
- There is a system malfunction.
- If the TCS is switched off or takes control.

Automatic brake intervention to mitigate damages

In some countries, the park assist system helps drivers by automatically intervening in the brakes on some cases → **▲**.

Depending on the version and certain conditions (e.g. weather conditions or vehicle load or angle), the park assist system may brake the vehicle automatically when facing an obstacle. The driver must then step on the brake pedal. Automatic brake interventions to mitigate damages interrupt parking manoeuvres.

▲ WARNING

Automatic brake interventions in the park assist system must not encourage drivers to take risks that may jeopardize safety. The system cannot substitute the driver's attention.

- The park assist system is subject to certain limitations inherent to the system. Automatic brake interventions may only work partially or may not work in some situations.
- Always be ready to brake the vehicle yourself.
- Automatic brake interventions last for approximately 1.5 seconds. After this period, the driver must brake the vehicle.

Looking for a parking spot

📖 Please refer to **▲** and **ⓘ** at the start of the chapter on page 139.

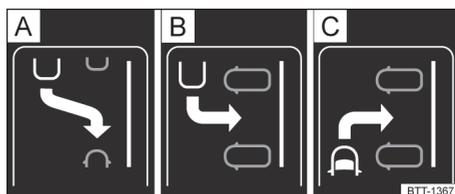


Fig. 114 On the instrument cluster display: indication of parking modes.

The Park Assist System features three parking modes → **Fig. 114** (schematic diagram).

- A** Line parking in reverse gear
- B** Side-by-side parking in reverse gear
- C** Side-by-side parking in forward gear

- Always drive slowly by a row of parked vehicles while paying attention to traffic.
- Press **Pa** **OR** on the radio display, touch the selection surface **Pa**. The park assist system automatically searches for a suitable parking space on the front passenger side.
- Stop the vehicle when the system recommends a parking mode on the instrument cluster display.
- Park upon the recommended parking mode showing up on the instrument cluster display → **Fig. 115** **⑤** → page 141.

If you wish the park assist system to search for a spot on the opposite side of the road, turn on the respective turn signal. **▶**

Change the parking mode

If the park assist system found other possible parking modes, they will be shown in reduced viewing mode. To select successively, press **P** OR touch the selection surface **P** on the radio display. After selecting all parking modes found, the system turns off. Press once again the button **P** OR touch the selection surface **P** on the radio display to show the initially recommended parking mode.

Side-by-side parking in forward gear

For side-by-side parking in forward gear, select the mode "Side-by-side parking in forward gear" → page 140 (if located by the system) by pressing the button **P** OR touching the selection surface **P** on the radio display.

i The Park Assist system must not be activated "later". The system will show if you previously passed by a suitable parking space.

Parking in a parking space

📖 Please refer to **▲** and **⌚** at the start of the chapter on page 139.

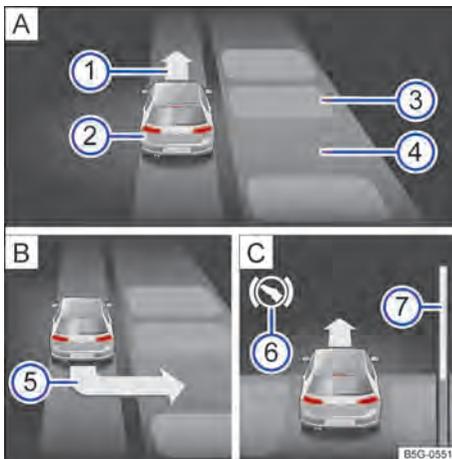


Fig. 115 On the instrument cluster display: park side by side. **A** Looking for a parking spot. **B** Parking position. **C** Manoeuvring.

Key to → **Fig. 115** (side-by-side parking with reverse gear):

- ① Indication of movement with forward gear
- ② Own vehicle
- ③ Vehicle parked or obstacle
- ④ Parking space detected.
- ⑤ Indication to select reverse gear
- ⑥ Indication to step on the brake pedal
- ⑦ Status bar. Symbolizes the relative distance to cover.

All required conditions must be met in order to use the park assist system → page 139 and the vehicle must be stationary.

- Release the steering wheel.
- Select reverse gear after an arrow is shown indicating the reverse gear on the instrument cluster display.
- Accelerate carefully.
- Brake whenever a sound alarm prompts to change direction, the arrow → **Fig. 115** ① **A** lights up, the white **Ⓢ** symbol appears, or when a message is displayed.
- Proceed until you hear a sound alarm or until the reverse gear selection indication is shown on the instrument cluster display.
- Return and proceed until a message appears on the instrument cluster display and a sound alarm is heard, as applicable.

Leave a parking space

📖 Please refer to ⚠️ and ⚠️ at the start of the chapter on page 139.

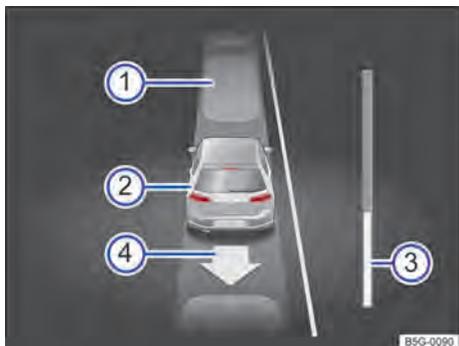


Fig. 116 On the instrument cluster display: leave a parking space in line.

Key for Fig. 116:

- ① Parked vehicle
- ② Own vehicle with reverse gear engaged
- ③ Status bar. Symbolizes the relative distance to cover.
- ④ Direction indication for the next move

The Park Assist system can be used to leave a parking space in line.

All required conditions must be met in order to use the park assist system to leave a parking space → page 139.

- Press **PR** OR on the radio display, touch the selection surface **PR**.
- Turn on the corresponding turn signal based on the side of the road from which you will leave the parking space.
- Selecting reverse gear.
- Let go of the steering wheel after the following message appears: **Active steering intervention. Check your surroundings.**
- Accelerate carefully.
- Brake whenever you hear the sound alarm, the white symbol lights up **Ⓢ** or the indication to proceed appears on the instrument cluster display.

- Step on the brake pedal until the park assist system finishes turning the steering wheel or until the white symbol **Ⓢ** goes off on the instrument cluster display.
- Return and proceed until a message appears on the instrument cluster display and a sound alarm is heard, as applicable.
- Take over the steering wheel with the steering angle adjusted by the park assist system.
- Leave the parking space when possible. ◀

Troubleshooting

📖 Please refer to ⚠️ and ⚠️ at the start of the chapter on page 139.

Sensors with no visibility, malfunction message, the system is shut off

The park assist system shuts off if the sensor is damaged.

- Clean the sensors or remove any stickers or accessories from the sensors and cameras → page 264.
- Check for visible damages,

The system behaves erratically

There may be several causes:

- The sensors are dirty. Besides dirt and snow, sensor visibility may be impaired due detergent residues or any kind of coating material → page 264.
- The system requirements must be met → page 139.
- The sensors are covered with water.
- The vehicle has damages on the sensor area (e.g. due to impacts when parking).
- The sensor detection range is blocked by an accessory (e.g. a bicycle rack).
- Modifications to the paint in the vicinity of the sensors or structural modifications have been made, for example, to the front or running gear of the vehicle.
- Some sources of noises (e.g. rough asphalt or cobblestones) may affect the ultrasound warning.

Solution for all cases

- Turn the system off temporarily.
- Check for any of the causes described above. ▶

- Once the source of the problem is eliminated, the system can be restarted.
- If the system still behaves erratically, seek assistance from a Volkswagen Dealership or a qualified workshop.

Rear Traffic Alert

Information about Rear Traffic Alert



Fig. 117 Monitored area around the vehicle that will leave the parking space (schematic representation).

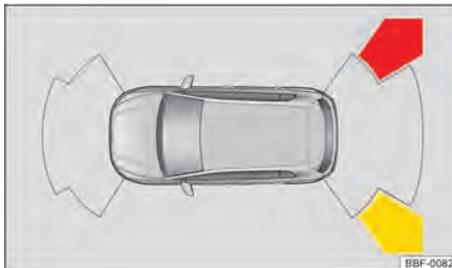


Fig. 118 Infotainment system: display of the Rear Traffic Alert.

Rear Traffic Alert monitors cross traffic when reversing out of a parking space or when manoeuvring.

Operation

The Rear Traffic Alert works with the help of radar sensors in the rear bumper.

The system detects objects that are approaching or moving in the rear and side surroundings and alerts the driver to an obstacle → Fig. 117.

If there is an obstacle, a warning signal will sound and the obstacle area will be displayed in colour in the Infotainment system → Fig. 118.

If the driver does not react, automatic braking intervention may occur → page 134.



Obstacle detected.



Automatic braking intervention by the Rear Traffic Alert.

- 1 Press the brake pedal to keep the vehicle stationary.

Turn on and off

- 1 To select the function on the instrument cluster, press the steering wheel  button.
Or: depending on the version, open the Assist systems menu in the vehicle settings of the Infotainment system.
- 2 Activate or deactivate the Rear Traffic Alert.

Display

- Red image segment: nearby obstacle. The vehicle is at risk. Brake!
- Yellow image segment: obstacle on the route. The vehicle is at risk. Adjust the steering angle.

Malfunction

If the Rear Traffic Alert is faulty, the following indicator light will come on in the digital instrument cluster:



The Rear Traffic Alert is faulty, for example, the sensors are dirty or there is an error in the system.

Driving with a trailer

If a trailer is electrically connected, the Rear Traffic Alert cannot be activated.

If the trailer has been disconnected, Rear Traffic Alert will reactivate after the ignition is turned on.

With towing brackets not installed at the factory, the Rear Traffic Alert must be switched off manually when driving with a trailer. ▶

WARNING

The intelligent technology shipped with the parking systems cannot go beyond the limits imposed by physics and will only operate within the system limits. Failure to comply may result in accidents, serious injuries, as well as damage to the vehicle.

- Pay attention to the traffic situation and the vehicle's surroundings.
- Rear Traffic Alert may not be able to detect all objects that are approaching, for example, pedestrians or quickly approaching objects.

Brake support systems

Information to the brake support systems

The vehicle is equipped with a brake support system:

- ESC system: the ESC, EDS, TCS, BAS, ABS and EBV brake support systems only function when the engine is running. They make a considerable contribution to active driving safety.

When the brake supporting systems are in operation, the brake pedal may pulse or noises may occur. Keep the necessary pressure constantly on the brake pedal.

Traction control (TCS)

The TCS reduces the engine drive in case of wheel skidding and adjusts the drive to road surface conditions. The TCS facilitates the starter, acceleration, and uphill effort, even under adverse road surface conditions.

When the traction control system is active the  indicator lamp will flash on the instrument cluster display.

Electronic Stability Control (ESC)

The ESC helps reduce the risk of skidding and improve driving stability under given driving conditions → .

In reverse gear, the ESC system may limit speed to ensure vehicle stability.

When the ESC is controlling, the  indicator lamp will flash on the instrument cluster display.

In ESC, the ABS, BAS, TCS and the EDS are integrated. The ESC must always be enabled. The ASR may be disabled through the radio → page 26 should sufficient propulsion no longer be reached under some driving scenarios, *depending on vehicle version*. Next, re-enable the TCS → page 146.

Anti-lock brake system (ABS)

The ABS prevents the wheels from locking when the brakes are applied up until the point where the vehicle is nearly stationary and assists the driver in steering the vehicle and keeping it under control. This means that the vehicle is also less likely to spin, even when the brakes are depressed fully:

- Strongly press and hold the brake pedal. Do not take your foot off the brake pedal or reduce the force on the brake pedal!
- Do not “pump” the brake pedal or reduce the pressure on the brake pedal!
- Steer the vehicle while the brake pedal is fully depressed.
- The ABS will switch off when the brake pedal is released or if the pressure on the brake pedal is reduced.

If the ABS is taking corrective action, you will be aware of a **pulsing movement in the brake pedal** and some noise. However, ABS will not necessarily guarantee shorter braking distances in *all* conditions. The braking distance could even be longer when braking on gravel or on fresh snow covering an icy or slippery surface.

Electronic brake variator (EBV)

In all vehicles, upon activating the brakes, the vehicle's centre of gravity shifts forward. This generates the risk of blocking rear wheels due to low traction. The electronic braking distribution limits the brake force on the rear wheels, ensuring an adequate brake force distribution between the front and rear axles. The electronic brake variator is part of the ABS functions.

Brake assist (BAS)

The BAS may assist in reducing the braking distance. The brake assist system enhances braking power when the driver suddenly hits the brake pedal in emergency braking situations. ▶

Do not reduce the the pressure on the pedal when the BAS is actuating. Upon reducing the pressure on the brake pedal the BAS stops its brake enhancing action.

Electronic Differential Lock (EDL and XDS)

The EDL brakes the wheel that is skidding and transfers the traction force to the other traction wheel.

The EDL turns off automatically under extraordinary strong demand to prevent the brake disc from overheating. The EDL is automatically activated again as soon as the brake has cooled down.

The XDS is an extension of the electronic differential lock. The XDS does not react to the skidding of the wheels, but to the relief of the inside front wheel when in fast curve driving. The XDS exerts pressure on the brake of the curve inside wheel, to prevent skidding. This way traction is improved. This helps the vehicle to keep within the desired lane.

Automatic Post-Collision Braking System

In case of an accident the Automatic Post-Collision Braking System may assist the driver in reducing the risk of skidding and the risk of further collisions during the accident by way of and automatically initiated braking.

The Automatic Post -Collision Braking System only works with frontal, side and rear collisions when the airbag control unit detects a given threshold for its activation during the accident.

The braking of the vehicle occurs automatically by way of the ESC, as long as the brake's hydraulics, the ESC and the electric system are not damaged and remain operational.

The following activities override the automatic braking in an accident:

- If the driver steps on the accelerator pedal. No automatic braking will occur.
- When the pressure exerted by stepping on the brake pedal exceeds the pressure on the brake induced by the system. The vehicle is manually braked.

WARNING

The intelligent technology shipped with the braking support systems cannot go beyond the limits imposed by physics and will only operate within the limitations of the system. Driving

fast on icy, slippery or wet roads can lead to a loss of control of the vehicle and could cause serious injury to the driver and its passengers.

- Adapt your speed and driving style to according to the visibility, weather, road and traffic conditions. Do not let the extra safety afforded by the ABS, BAS, EDL, TCS and ESC braking support systems lead you into temptation of putting safety at risk when driving.
- Slippery and wet roads remain rather dangerous, even with the ESC and all the other systems.
- Driving at high speeds on wet roads can cause the wheels to lose contact with the road surface and “aquaplane”. A vehicle cannot be braked, steered or controlled once it has lost contact with the road surface.
- The brake support system cannot prevent an accident if, for example, you are driving too close to the vehicle in front or are driving too fast for the respective driving situation.
- Despite the braking support systems being very effective and able to help control the vehicle in difficult driving situations, please always remember that the driving stability of the vehicle depends on tyre grip.
- When accelerating on a slippery surface, for example on ice and snow, press the accelerator carefully. Even with the braking support systems the wheels may skid. That may cause the loss of control over the vehicle.

WARNING

The effectiveness of the ESC can be considerably reduced when other components and systems that affect the dynamics of driving are not correctly serviced or are not functioning properly. This also applies, but not exclusively, to the brakes, tyres and other systems that have already been named.

- Always remember that modifications and changes to the vehicle may affect the correct functioning of the ABS, BAS, TCS, EDS and ESC systems.
- Alterations to the suspension or the use of factory unauthorized wheel and tyre sets may have a detrimental effect on the working of the ABS, BAS, TCS, EDS and ESC reducing their efficiency.

- ESC efficiency is also conditioned to the use of suitable tyres → page 245, *Important information on wheels and tyres.*

⚠ WARNING

Driving without the brake servo can considerably increase the braking distance and thus cause accidents and serious injuries.

- Never allow the vehicle to roll if the engine is switched off.
- If the brake servo is not functioning or the vehicle is being towed, the brake pedal will have to be depressed more forcefully, since the braking distance will be increased due to the lack of braking force support.



Operating noises may be heard during regulating procedures of the described systems. <

TCS Enabling and disabling

Should not sufficient propulsion be reached, you may disable the TCS (for vehicles with ESC):

- When driving on loose ground or deep snow.
- During “free wheel spinning” while stuck in mud or other areas.

Then, enable the TCS function again.

Enabling and disabling the TCS

- According to the version of the vehicle and of the radio, press the **CAR** button on the radio system → page 26.
- Open the menu **Vehicle settings** on the radio system.
- Touch the **ESC system:** function button.
- **Turning the TCS off:** select the **TCS deactivated** option.
- **Turning the TCS on:** select the **TCS activated** option.
- Depending on the vehicle and radio version, in the radio system through button **CAR** OR the selection button **⊕** and function button **Car** → page 26.
- Configure the stability program: touch the function button **ESC On** OR **ASR Off**.

With the TCS disabled, the *yellow* ⚠ warning lamp will flash on the instrument cluster display. <

Troubleshooting

Failure warning and indicator lamps



Stop driving! Damaged brake system. Seek out assistance from a Volkswagen Dealership immediately → ⚠.



Lit: ABS out of action or malfunctioning. Contact a Volkswagen Dealership. The vehicle can be braked without ABS.



Lit: ESC disabled for system-related reasons. Switch the ignition off and on again. As the case may be, drive on for a short distance at about 15-20 km/h. If ⚠ remains on, seek out a Volkswagen Dealership.

Guidelines for the braking support systems

When there is a suspicion that there may be a faulty function, read and observe the following instructions:

- The ESC and TSC can only function properly when all four wheels are equipped with the same tyre type and model. Different diameters among the wheels/tyres may cause an unexpected reduction in engine power.
- In case of damages in the ABS system, the ESC, TCS, and EDS will also be disabled.
- Operating noises may result from adjustments to the described systems.

Adverse conditions:

The electronic stability program (ESC) may not identify very steep slopes (over 30%). This circumstance may affect the regular operation of the electronic stability program (ESC) and consequently the hill assist system (HHC - Hill Hold Control), emergency braking assistant (Front Assist) and parking sensor.

To restore the aforementioned systems, it is sufficient that the vehicle is turned off and on again and that the driver starts the car and drives it at a speed greater than 25 km/h for a few seconds.

⚠ WARNING

Driving with faulty brakes may cause severe accidents and injuries.

- If the braking system warning lamp ⚠ lights up along with the ABS control lamp ⚠, the ABS function may be faulty. Because of this it may be possible that the rear wheels block relatively quickly when braking. Locking rear wheels may cause the driver to lose control ▶

over the vehicle! If possible, reduce speed and drive carefully at minimum speed to the nearest Volkswagen Dealership to check the braking system. Avoid sudden braking and driving manoeuvres while driving.

- If the ABS control lamp  lights up or remains lit while driving, the ABS is not functioning properly. The vehicle can only be braked with regular brakes (without ABS). The protection provided by the ABS will not be available under this scenario. Go to a Volkswagen Dealership as soon as possible.

Practical equipment

Stowage compartment

Introduction

Only use stowage compartments to stow light or small objects.

WARNING

Loose objects may be flung through the vehicle interior in the event of a sudden driving or braking manoeuvre. This can cause serious injury and can also lead to loss of control of the vehicle.

- Do not stow any pets or any hard, heavy or sharp objects in the vehicle's open stowage compartments, on the dash panel, on the shelf behind the rear seats, or in items of clothing and bags in the vehicle interior.
- Always keep stowage compartments closed while driving.

WARNING

Items in the driver footwell can hinder pedal operation. This can lead to loss of control of the vehicle and increase the risk of serious injury.

- Ensure that all pedals can always be operated without any hindrance.
- Foot mats must always be properly secured in the footwell.
- Additional foot mats or other floor coverings should never be placed over the fitted foot mat.
- Ensure that no objects can enter the driver footwell while the vehicle is in motion.

NOTICE

- Hard objects on the shelf can chafe against the wires of the heating element in the rear window and cause damages.
- Do not store any temperature-sensitive objects, food or medicines inside the vehicle. Hot and cold temperatures could damage them or render them unusable.

- Items stored in the vehicle made from transparent materials, e.g. glasses, magnifying glasses or transparent suction cups on the windows, can concentrate the sun's rays and thus cause damage to the vehicle.

 The ventilation openings between the rear window and the luggage compartment cover must not be covered as this would prevent stale air escaping from the vehicle.

Storage area in the lower part of the centre console

 Please refer to  and  at the start of the chapter on page 147.



Fig. 119 In the lower part of the centre console: stowage area.

On the bottom of the centre console there is an open stowage area → [Fig. 119](#).

 Depending on the vehicle version, there may be a USB port  → page 153 and wireless charging function in the stowage compartment → page 148.

Wireless charging function

 Please refer to  and  at the start of the chapter on page 147.

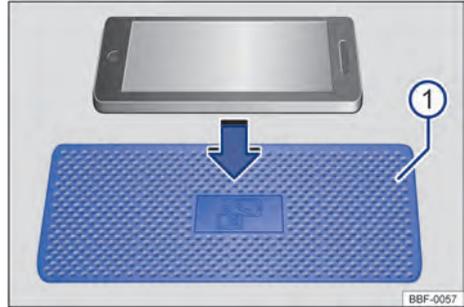


Fig. 120 Stowage compartment with pad for wireless charging function. The symbol on the lining pad may appear differently in some vehicles.

Depending on the vehicle version and country, the wireless charging function may not be available.

Depending on the vehicle version, the charging area → [Fig. 120](#)  of the wireless charging function is located in the middle of the centre console or storage compartment, in the area between the front seats.

The wireless charging function allows wireless power transferring by short-distance electro-magnetic induction.

The Qi standard allows the wireless charging of smartphones to support the Qi protocol.

To find out if a mobile phone device supports the Qi standard, check the device specifications in the manufacturer's site.

Only a Qi-compatible mobile phone without a protective cap with a dimension (width x length) of approximately 80 mm x 140 mm (3.15 in x 5.512 in) can be placed evenly on the wireless charging function floor mat.

The power charge depends on mobile phone configurations and is controlled based on battery level and temperature.

Before charging a device, remove all foreign objects with metallic parts, such as coins, keys, and clips, from the charging area.

To charge a mobile phone that supports the Qi protocol, place it with the screen facing upwards in the centre of the charging area. The charging process begins automatically.

The factory-fitted radio system informs the beginning of the charging process and, if applicable, also informs of any foreign objects with metallic components detected in the charging area.

Remove these foreign objects to resume charging.

If a mobile phone is not placed correctly in the charging area or is too small, it may not be recognized appropriately. In these special cases, the radio system may report a foreign object detected. In this case, simply place the mobile phone closer to the centre of the charging area to obtain better results.

New technologies may not support the wireless charging function. The mobile phone manufacturer provides more information about compatibility.

Storage compartment cover

Depending on the vehicle version and country, the storage compartment for the wireless charging function has a cover for the mobile phone screen.

The cover may avoid distractions coming from the mobile phone, such as incoming messages.

The cover must always be closed while driving and the mobile phone screen must be completely covered.

⚠ WARNING

- Notifications shown on the mobile phone screen may distract the driver and increase the risk of a serious accident.
- Do not place any objects made of metal or containing metallic components on the charging area. Metallic objects may become extremely hot. This can cause skin burns and even fire hazards, in more extreme cases.
- Do not place identification cards (e.g. credit cards, bank cards) with magnetic strips or chips in the charging area. In extremely rare cases, the data stored in the magnetic strip or chip may become useless.

📌 NOTICE

- Charging is only activated when while the ignition is on.

- Always use mobile phones compatible with the Qi protocol in the charging area.
- Charging performance is optimal when the mobile phone is placed on the centre of the charging area.
- Thick mobile phone protective cases (greater than 2 mm) may affect charging performance.
- Some people can hear faint clicks during charging. That is perfectly normal and does not indicate anything is wrong.
- If the vehicle's interior temperature is too high (e.g. after prolonged exposure to sunlight), wait until the temperature drops before using the wireless charging function.
- The mobile phone heats up more during wireless charging compared to conventional corded charging. That is normal.
- Depending on the battery level and temperature, some mobile phones may stop charging at around 80%. That is also normal.

Front passenger side glove compartment

📖 Please refer to **⚠** and **📌** at the start of the chapter on page 147.

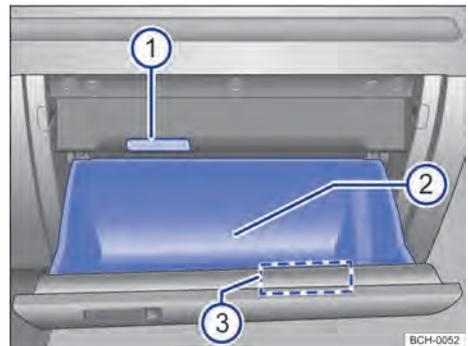


Fig. 121 On the front passenger side: open glove compartment.

The scope of items in the glove compartment depends on the vehicle version.

Key for Fig. 121:

- ① Internal glove compartment lighting.
- ② Vehicle wallet holder.
- ③ Coin holder.

Opening and closing the stowage compartment

To *open*, pull the handle.

To *close*, press the lid fully upwards.

Vehicle wallet

The glove compartment is intended to accommodate the vehicle wallet. The vehicle wallet must always be kept in this stowage compartment.

⚠ WARNING

An open stowage compartment may increase the risk of severe injuries in case of an accident or a sudden driving or braking manoeuvre.

- Always keep glove box closed while driving.

Front centre armrest stowage compartment

📖 Please refer to ⚠ and ⌚ at the start of the chapter on page 147.



Fig. 122 In the front centre armrest: stowage compartment.

Open: lift the centre armrest → Fig. 122.

Close: swing the centre armrest down.

⚠ WARNING

The centre armrest may restrict the movement of the driver's arms and lead to severe accidents and injuries.

- Always keep the centre armrest stowage area closed while driving.

⚠ WARNING

Never ever transport a person or a child on the centre armrest.

ℹ Depending on the vehicle version, there may be a USB port in the rear part of the armrest ← → page 153.

Storage compartment in the roof console (glasses compartment)

📖 Please refer to ⚠ and ⌚ at the start of the chapter on page 147.



Fig. 123 In the roof console: glasses compartment.

Open: press and release the → Fig. 123 button.

Close: press the lid upwards until it engages.

ℹ To ensure proper interior monitoring of the vehicle, the stowage areas must be closed when locking the vehicle → page 64.

Other stowage compartments

📖 Please refer to ⚠️ and ⓘ at the start of the chapter on page 147.

Other possible compartments:

- In the front and rear door lining.
- Stowage bag on the front passenger seat backrest.
- Surface behind the rear seat for small clothes.
- According to the vehicles version, there may be a card holder in the lower centre console.
- **Hooks for clothes** on the centre door columns.
- **Bag hook** in the luggage compartment
→ page 197.

⚠️ WARNING

Objects that are not secured or are secured incorrectly behind the rear seat backrest can cause serious injuries in the event of a sudden driving or braking manoeuvre or accident.

- Do not stow any hard, heavy or sharp objects in pockets, purses or loose on the surface of the luggage compartment cover.
- Never carry animals on top of the luggage compartment cover.

⚠️ WARNING

Hanged clothing may compromise driver visibility and, therefore, cause severe accidents and injuries.

- Ensure that clothes hanged on the clothing hook are not compromising driver visibility.
- Use the vehicle clothing hook only to hang small clothes. Never leave hard, heavy or sharp objects in pockets.

ⓘ NOTICE

Each bag hook supports a maximum load of 2.5 kg.

Cup holder

📖 Introduction

Bottle holders

Bottle holders are located in the open stowage compartments of the driver and front passenger doors.

⚠️ WARNING

Incorrect use of the cup holders can cause injury.

- Do not place any hot drinks in a cup holder. In the event of a sudden braking manoeuvre or accident, hot drinks in a cup holder can be spilled and cause scalding.
- Ensure that drink bottles or any other objects do not enter the driver footwell and obstruct the pedals while the vehicle is in motion.
- Never place heavy cups, food or any other heavy items in the cup holder. These heavy objects could be flung through the vehicle interior during an accident and cause serious injuries.

⚠️ WARNING

Closed drink bottles can explode in the vehicle in extreme heat or crack in extremely cold temperatures.

- Never leave closed drink bottles in an extremely hot or extremely cold vehicle for extended periods.

ⓘ NOTICE

Do not leave any open drinks in the cup holder while the vehicle is in motion. Drinks that are spilled, for example during braking, can damage the vehicle and the vehicle electric system.

Cup holders in the centre console

📖 Please refer to ⚠️ and ⚠️ at the start of the chapter on page 151.

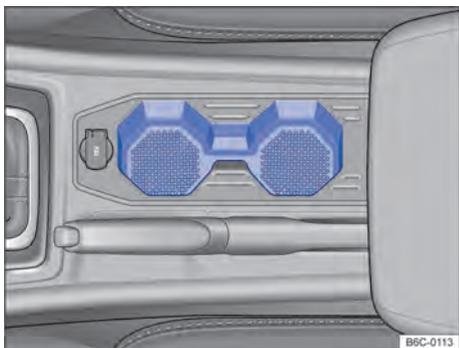


Fig. 124 In the front centre console: cup holder.

There are two cup holders in the front centre console → Fig. 124.

Socket

Introduction

Electrical devices may be connected to the socket in the vehicle.

The electric devices must be in perfect condition for use. Do not use faulty devices.

The 12-volt socket only works while the ignition is switched on.

⚠️ WARNING

Improper use of the socket and electrical devices can cause fires and severe injuries.

- Never leave children in the vehicle unattended. The socket and the devices connected to it can be used when the ignition is switched on.
- should the electric devices get very hot, turn them off and disconnect them from the outlet.

⚠️ NOTICE

To prevent damage to the electrical system, never connect electric devices to the 12-volt outlet socket which generate electric power to charge the battery of the vehicle, such as solar panels or battery charging units.

- Only use accessories that have been approved in accordance with current directives concerning electromagnetic compatibility.
- To prevent damage from electric current fluctuation, the electric devices must be turned off prior to switching the ignition on or off. Given the version of the vehicle, if the Start-Stop system automatically turns the engine off and on again, the electric equipment does not need to be turned off.
- Never connect electric devices to the 12 V power outlet which consume more power than the indicated power. When exceeding the indicated power, the vehicle's electrical system may be damaged.
- Refer to the owner's manuals of the connected devices!



Do not leave the engine running when the vehicle is stationary.



The ignition turned on plus use of electric appliances while the engine is switched off drains the battery.



Unshielded devices may damage the radio system and electronic components of the vehicle.

12 V Socket in the vehicle

📖 Please refer to ⚠️ and ⚠️ at the start of the chapter on page 152.



Fig. 125 In the front centre console: 12 V socket.

Maximum power rating

12 V socket 120 W

The maximum power rating of the sockets may not be exceeded. The maximum power rating of each device is stated on its type plate.

12-V socket

The 12V socket is located in the front centre console and is powered only when the ignition is switched on.

Using electrical appliances with the engine switched off and the ignition switched on will drain the battery. Therefore only plug electrical consumers into the sockets when the engine is running.

To prevent damage due to voltage fluctuation, switch off any connected devices before switching the ignition or engine on or off.

Radio

Before using the unit for the first time

Depending on the vehicle version, the radio may not be available.

Control list

Before first use, following steps should be executed to safely operate the radio and make full use of its features:

- ✓ Follow safety recommendations  → page 154.
- ✓ Get yourself familiarized with the general overview of the unit.
- ◀ ✓ In **System Configurations**, reset the radio to its factory settings (factory settings / reset system → page 181 or → page 191
- ✓ Use appropriate data storage units for media operation. 

Other applicable documents

Apart from this manual for the use of this radio and its components please also see the following documents:

- Operating Manual of the mobile telephone system.
- Operating Manual of the external multimedia units.
- Instructions for a retrofitted accessory. 

Convenience overview

The radio may be factory equipped with some of the components below. Depending on the vehicle or its version, part of these components is optional:

- Loudspeakers, installed in different fitting locations and output levels (Watt).
- Multifunction steering wheel with its controls
- Media units.
- Cable connections to the external multimedia units. 

- Wireless connection for external multimedia devices.
- Mobile phone interface.
- Sound system.

Safety recommendations

Prior to first use of the device, read and follow the safety instructions listed below to detect and prevent possible hazards to yourself and others:

- Read this instruction with attention:
- Some function areas may contain links to third party web pages. Volkswagen is not responsible for this content and its access does not authorize copying, reproducing or quoting third-party content.
- For optimal safety of personal information stored in the radio system, it is recommended to keep the valet mode on → page 193 when possible.
- Radio stations and other means of communication, such as newspaper websites and third-party apps are responsible for the content of information transmitted in such media.
- Covered parking places, tunnels, tall buildings, mountains or additionally operated electric equipment, such as battery chargers, may also interfere with the radio reception.
- Metal-coated stickers or films may hinder reception in vehicles with window aerials.

WARNING

Accidents and injuries can occur if the driver is distracted. Operating the radio may distract drivers from the traffic.

- Never reset the system while driving.
- Always drive carefully and responsibly.
- Adjust sound volume settings to allow the driver to hear external warnings and sounds (for example: emergency service sirens)
- Excessively high volumes may compromise hearing. This also occurs when vehicle occupants' hearing is submitted to high volumes, even if briefly.

WARNING

Sudden volume variations may occur when switching or connecting an audio source.

- Reduce the master volume before connecting or switching audio sources.

WARNING

Connecting, inserting, or removing data storage units while driving may distract the driver from his/her surroundings and cause accidents.

WARNING

External device connection cables could hinder the driver's movement, depending on how they are arranged.

WARNING

Loose or unsecured external devices may be flung through the vehicle interior and cause injuries in case of sudden evasive or breaking manoeuvres or in the event of accidents.

- Never place or attach external devices on doors, windscreen, on or near areas marked with "AIRBAG" on the steering wheel, dashboard, seat backrests, or between these areas and vehicle occupant himself. External devices may cause severe injuries in the event of accidents, especially if the airbags are triggered.

WARNING

In explosion prone places, turn mobile telephones off!

WARNING

Unfavourable light conditions and a damaged or dirty display may cause information and indications not able to be read or be correctly read on the display.

- Indications or information on the display must never be a reason to run a safety risk. The display is not in condition to replace the drivers attention.

WARNING

Radio stations may broadcast important warnings. The following conditions may compromise radio signal reception:

- If your current location is in a region of poor or no reception. Such region includes tunnels, urban canyons, parking garages, underground passageways, mountains, and valleys. ▶

- If, in areas with the bandwidths of the radio stations present interferences or are unavailable.
- When the necessary vehicle components required for radio signal reception are damaged, inoperative or without sufficient electric power.

⚠ WARNING

Operating radios with excessive volume, especially if over 85 decibels, may cause ear injuries.

- If the volume is excessively high, exterior acoustic signals, such as police and fire department sirens and other vehicles' horns, may not be audible and may cause accidents.

⚠ WARNING

- Liquids may cause damage, overheat the radio unit and lead to a greater risk of fire.
- To reduce the risk of fire or electrical discharge, do not expose the radio unit to rain or humidity. To avoid the risk of electrocution, do not open the radio unit. Seek out assistance at a Volkswagen Dealership.

ⓘ NOTICE

Use the appropriate power supply. The radio was designed to be used with a battery system connected to the negative terminal (Earth) and positive 12V terminal. Never use this radio unit with other battery systems, especially a 24-V battery system.

ⓘ NOTICE

If the radio is out of service (no power, no sound) or in other abnormal conditions (foreign objects, exposed to water, smoke or unusual smell), turn it off immediately and seek out assistance at a Volkswagen Dealership.

ⓘ NOTICE

Mobile phones must always be turned off in locations in which their use is prohibited. The radiation generated by mobile phones may cause interference with sensitive medical devices and technical equipment, which may hinder or damage such devices.

ⓘ NOTICE

The vehicle's loudspeakers may be damaged if the volume is too high or the sound is distorted.

ⓘ NOTICE

Introduction of objects, incorrect placing and introduction of data storage units of different shapes and sizes may damage the media readers and the radio.

- Ensure correct insertion position when inserting a data storage unit.
- Insert only adequate data storage units into the respective media reading units.
- Excessive pressure could break the SD card slot lock.

ⓘ NOTICE

Foreign matter and liquids adhering to a data storage device may damage the media reading unit and the radio.

- Do not attach stickers or similar materials to data storage units. Stickers may peel off and damage the media reading unit.
- Do not use CDs with printable data. Residues and stickers may peel off and damage the media reading unit.

Instructions for use

- When using the radio, follow the specific national recommendations and legal determinations.
- To operate the radio a light touch on the button or screen suffices.
- To make the best of the radio's features and optimal operation it is important that the date and time be correctly set.
- Some of the function surfaces and modes detailed herein may not be available in country-specific software. The absence of a radio icon or function button on the display is not a device defect.
- Depending on the country, some functions of the radio are no longer selectable on the display as of a certain speed threshold, as required by local law.

- In certain countries, there may be restrictions regarding the use of Bluetooth^{® 1)} devices and Wi-Fi connections. Additional information and Wi-Fi connections may be obtained from local authorities.
- The display of all indications and the execution of the functions are only available after the complete start up of the radio. The start up time of the system depends on the scope of the radio function and can last more than usual especially at low and high temperatures.
- After a disconnection of the vehicle battery, turn the ignition on before switching on the radio.
- The radio is connected to the vehicle – the radio cannot be installed in another vehicle.
- In order not to impair its operation, repairs and modifications to the radio may only be performed by a Volkswagen Dealership.
- Phone calls received in mobile phones inside the vehicle may cause interference in the vehicle's loudspeakers.
- With the engine turned off and low battery charge, the radio is automatically turned off.
- High speed, unfavourable weather and road conditions, as well as poor network connection may hinder or interrupt mobile phone calls inside the vehicle.

If the vehicle battery has been disconnected, switch the ignition on before switching the unit on.

Display

Active display areas with recorded functions are referred to as "function buttons" and operated by brief *touches* or extended *touches* on the display. Function buttons are described herein by the word "function button".

Clean the display

To clean, turn the radio off.

TO clean the display, use a smooth and clean cloth slightly damp with clean water.

Soften resistant dirt with a humidified cloth, taking care not to damage the radio.

! NOTICE

Do not dry clean the display. Doing so may cause scratches that cannot be removed.

- Do not use aggressive or solvent-based cleaning products. Such cleaning products may damage the radio and leave the display "misty".
- Exert only a light pressure when cleaning the display.

Power management

When, with the ignition turned off and the device on, the battery power falls below the minimum voltage, an acoustic signal sounds and the message **LOW BATTERY** is displayed. In this case, the unit must be switched off.

Anti-theft coding

The unit is protected against theft and unauthorized use by a security code (anti-theft coding).

After its first being entered, the anti theft code is saved to the memory of the vehicle (convenience coding of the radio) If the anti-theft coding has to be manually deactivated, e.g. when installing the unit in another vehicle, please contact a Volkswagen Dealership.

¹⁾ Bluetooth[®] is a registered trademark of Bluetooth[®] SIG, Inc.

Composition Touch (R 340G)

Device overview

Overview

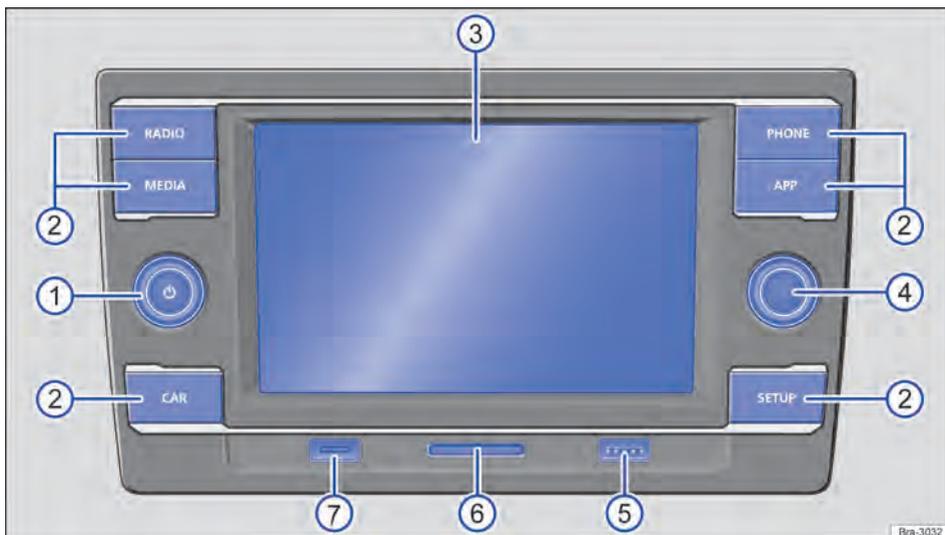


Fig. 126 Control overview.

- ① **Rotary/push knob** 
 - Press to turn the unit on or off.
 - Turn to adjust the base volume of the corresponding active source.
- ② **Radio buttons:** press to access a function button.
- ③ **Display:** touchscreen.
- ④ **Settings button:** the function is conditioned to the respective operating condition.
- ⑤ **USB port:** to connect external data storage units.
- ⑥ **SD card slot:** to insert SD cards.
- ⑦ **Microphone:** do not obstruct the microphone and keep it always clean. ◀

Rotary and push knob

Rotary/push knobs

The rotary/push knob  is referred to as volume control or on/off button.

The right-hand rotary/push knob is referred to as selector.

Turning the radio manually on or off

Press the on / off button briefly .

Turn the radio on or off automatically

According to its version, the unit is automatically turned off when the engine is turned off or the ignition key is removed from the ignition lock. If the radio is manually switched on again, it will be automatically switched off after approximately 30 minutes (timeout).

Volume increase ore decrease

Once on, the radio starts to operate at the last adjusted volume level, as long as the maximum pre defined turn on volume is not surpassed. ▶

- Turn the volume control  (right or clockwise to turn up and left or counter clockwise to turn down)

Some volume adjustments can be preset.

Mute

When in mute mode, the active audio source is interrupted or muted. The indication can be seen on the display screen .

- Turn the volume control button  counter clockwise until audio can no longer be heard. 

Basic command information

Function surface and display controls

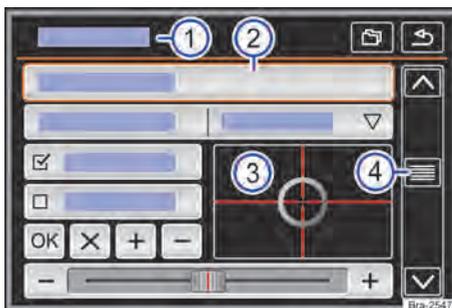


Fig. 127 Schematic representation: overview of possible function buttons on the display.

Selector button

The selector button can be turned or pushed. When *turned*, lists are searched or radio station lists or of media titles are opened. When *pressed* marked records are accessed, configurations are set and functions started or interrupted. 

The device is equipped with a touchscreen → Fig. 127 .

Active display areas with recorded functions are referred to as “function buttons” and operated by brief *touches* or extended *touches* on the display. Function buttons are described herein by the word “function button” and the button symbol .

Function buttons start specific functions or open other submenus. The currently selected menu is indicated on the title line of submenus → Fig. 127 .

Inactive function buttons (grey) cannot be currently selected.

Overview of possible function buttons and displays

To operate the radio buttons, press them *briefly*.

PHONE: access the telephone interface. If there is no telephone interface installed, the current audio source is muted.

RADIO: turn on in radio mode and then change the frequency range.

MEDIA: change to media mode and from there select the media source.

APP: access the interface with App-Connect.

SETUP: *press* to show additional functions related to the current mode (radio, media, etc.). 

- 1 The title line indicates the currently selected menu and, eventually, other function buttons.
- 2 Touch to open a different menu.
- 3 Move the target over the display without removing the finger, slightly pressing **or** touching the desired position in the display to move the target to the respective position.
- 4 Gently press to move the scroll bar over the display in a single move, and scroll through the lists → page 159, *Access list entries and search lists*. 

-  Touch to gradually close some lists one level above.
-  Touch to gradually close submenus until returning to the main menu or to undo the previous entries.
-  Touch to open a pop-up window containing additional settings.
- / Some functions or displays are selected through a checkbox and activated or deactivated by a touch.
- Touch to confirm an entry or selection.
- Touch to close a pop-up window or an entry template.
- / Touch to gradually change the settings.
-  Gently move the scroll bar pointer along the bar with a finger move applying a light uninterrupted pressure on the display surface.

Access list entries and search lists



Fig. 128 Schematic representation: list entries, settings menu.

List entries can be accessed by directly touching the screen or with the selector button → Fig. 128 ①.

If the available entries on a list do not fit the display, function buttons or a scrollbar are shown on the right-hand side to scroll through entries → Fig. 128 ②.

Selecting and accessing list entries with the control button

Turn the control button to sequentially select list entries through a checkbox and search the list.

Press the control button to access the selected list entry.

Search lists (scroll)

Search by list line: Briefly touch the function button or .

Search by list page: Briefly touch the top or bottom of the scroll bar.

Quick search by list page: Touch and hold the top or bottom of the scroll bar.

Quick search in long lists: Place finger over the scroll bar indicator and move it up or down *in a single move*. Remove the finger from the screen after reaching the desired position.

Entry masks with display keypad



Fig. 129 Representation: entry mask with display keypad.

Entry masks with display keypads are used to enter memory names or search terms in long lists, among other functions.

The function buttons listed herein are not available in all countries or topic areas.

The following chapters detail only the functions not covered in this representation.

The entry line with symbol entry mask (cursor) is located on the upper left display line. All entries are displayed in this area.

Entry masks to "enter text"

Letters, characters and special symbols can be selected in any combination to enter free texts in entry masks.

The currently displayed sequence of symbols is applied by touching the function button .

Entry masks to select stored entries

Only combinations of letters, characters and special symbols corresponding to a stored entry can be selected for the introduction mask.

If less than 99 entries can be selected, the number of remaining entries is shown through the entry line → Fig. 129 ③. Touching this function button will display all remaining entries in a list. If less than 5 entries can be selected, the list is automatically opened.

Overview of function buttons

- ① : touch to open the entry mask for special symbols and numbers. **OR:** : touch to switch to the letter entry mask.
- ② : Touch to switch to a different keypad language. The keypad language can be selected through the **System settings** menu.
- ③ : Shows the quantity and opens the list of entries corresponding to selectable presets.

Letters and numbers Touch to apply the entry line.

Letters and Press and hold to open a pop-up window with special symbols based on the letters. Select the desired characters via touch. Some special signs can also be transcribed (e.g. "AE" to "Ä").

- Touch to switch between upper case and lower case, as well as numbers and special characters.
- Touch to insert a blank space.
- Touch to apply the introduction line suggestion and close the entry mask.
- Touch to delete symbols on the entry line, from right to left. Press and hold to delete multiple symbols.
- Touch to close the entry mask.

Additional displays and display options

Display indications may vary from those described herein, depending on the settings.

The time can be shown on the display status line.

All displays can only be shown after a complete start-up process of the radio.

Connectivity

App-Connect

Some menus and functions are not available in all the countries for all the vehicles.

The following interfaces are available in the App-Connect menu:

- Apple CarPlay™¹⁾
- Android Auto™²⁾

To prevent the driver from distraction only special applications may be used while driving →

According to the mobile device used, a connection is established through the respective interface.

Thereby it is possible that the functions and the contents displayed on the mobile devices are displayed and controlled on the radio display.

WARNING

The use of applications while driving may distract from the surrounding traffic. Accidents and injuries can occur if the driver is distracted.

- Always drive carefully and responsibly.

WARNING

Loose or unsecured mobile phones may be flung through the interior and cause injuries in case of sudden evasive or breaking manoeuvres or in the event of accidents.

- While the vehicle is in motion, always secure mobile devices properly outside the airbag deployment zones or stow them away safely.

WARNING

Inadequately or inappropriately designed applications may cause damages to the vehicle, accidents and serious injuries.

¹⁾ Apple CarPlay™ is an Apple Inc. trademark.

²⁾ Android Auto™ is a Google Inc. trademark

- Volkswagen recommends to use only applications offered by Volkswagen for the specific vehicle.
- Protect the mobile device with its applications from misuse.
- Never alter the applications.
- Follow the owner's manual of the mobile device.

NOTICE

Mobile devices must always be turned off in locations where their use is not allowed. The radiation generated by mobile devices may cause interference with delicate medical and technical equipment, which may impair or damage such devices.

NOTICE

Volkswagen does not take responsibility for damages caused to the vehicle due to the use of low quality or defective applications, insufficient programming of the applications, insufficient network, for loss of data during transmission or misuse of mobile devices.

For more information, refer to the mobile device's owner's manual.

For more information, refer to the mobile device's owner's manual.

Apple CarPlay™



Fig. 131 Selection of the mobile device.

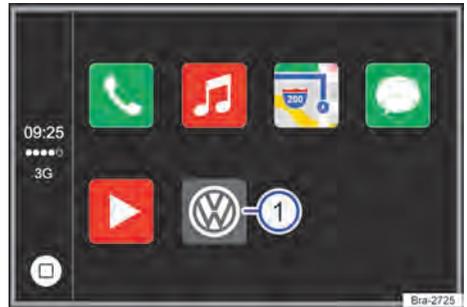


Fig. 132 Apple CarPlay™ Menu.

App-Connect main menu



Fig. 130 App-Connect main menu.

1 [Info]: display of further information.

Open the App-Connect settings menu

In the App-Connect main menu, touch the [Config.] function button. .

Apple CarPlay™ Requirements

The following conditions are required to use Apple CarPlay™:

- ✓ The mobile device **must** support Apple CarPlay™.
- ✓ The mobile device **must** be connected by a USB cable to the radio.
- ✓ The USB cable to be used **must** be an original cable from the mobile phone manufacturer.

Establish connection

When a mobile device is connected for the first time follow the instructions on the radio display and on the display of the mobile device.

- The assumptions for use of the Apple CarPlay™ must be met.
- Press the **APP** button.
- Select your connected mobile device pressing on the corresponding icon.

Disconnect

- While using Apple CarPlay™, touch the surface function → Fig. 132 ① to access App-Connect in the main menu.
- Touch the function button → Fig. 131 ① to end the active connection.

Particularities

During an active Apple CarPlay™ connection, the following features are enabled:

- Bluetooth connection among mobile devices and the radio are **not** possible.
- An active Bluetooth connection is automatically finalized.
- Telephone functions are only possible via Apple CarPlay™. The radio functions described in this manual are **not** available.
- The connected device **cannot** be used as a media device on the Media menu.

Voice command

Depending on the type and version of the vehicle, the voice command feature may not be available.

- On the multifunction steering wheel or on the mobile phone, press **VOICE** or **☎** **briefly** to start the device's voice command feature.
- On the multifunction steering wheel or on the mobile phone, press **VOICE** or **☎** **for a few seconds** to start the connected device's voice command feature.

 For more information, refer to the mobile device's owner's manual.

Android Auto™



Fig. 133 Selection of the mobile device.



Fig. 134 Android Auto™ Menu

Android Auto™ Requirements

The following conditions must be met to use Android Auto™:

- ✓ The mobile device **must** support Android Auto™.
- ✓ The mobile device **must** be connected by a USB cable to the radio.
- ✓ The USB cable to be used **must** be an original cable from the mobile phone manufacturer.
- ✓ Depending on the mobile device used, an adequate application must be installed to use Android Auto™ on the device.

Connect

When a mobile device is connected for the first time follow the instructions on the radio display and on the display of the mobile device. 

- The assumptions for use of the Android Auto™ must be met.
- Press the **APP** button.
- Select your connected mobile device pressing on the corresponding icon.

Disconnect

- While using Android Auto™, touch the function button , → Fig. 134 .
- Select the **Return to Volkswagen** function to access the **App-Connect** main menu.

Particularities

During an active Android Auto™ connection, the following features are enabled:

- An active Android Auto™ device may be simultaneously connected to the radio via Bluetooth.
- Bluetooth connection between other mobile devices and the radio are **not** possible.
- Telephone functions are possible via Android Auto™. When the Android Auto™ device is simultaneously connected via Bluetooth to the device, the phone function can also be used.
- Simultaneous phone calls via Android Auto™ and via the radio are **not** possible.
- An active Android Auto™ device **cannot** be used as a media device on the Media menu.

Voice commands

Depending on the type and version of the vehicle, the voice command feature may not be available.

- On the multifunction steering wheel or on the mobile phone, press **VOICE** or  **briefly** to start the radio's voice command feature.
- On the multifunction steering wheel or on the mobile phone, press **VOICE** or  **for a few seconds** to start the connected device's voice command feature.

 For more information, refer to the mobile device's owner's manual.

Unit operation

Introduction

Follow the national rules and legal provisions when using the radio.

Other additional electric devices connected to the vehicle may interfere with the receipt of the broadcast radio signal and cause noises in the speakers.

 Parking lots, tunnels, tall buildings or mountains may interfere with unit signal reception.

 Metal-coated stickers or films may hinder reception in vehicles with windscreen aerals.

Radio main menu



Fig. 135 The radio main menu.

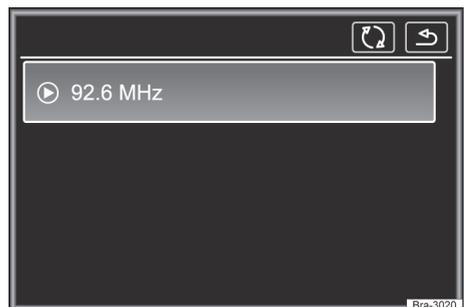


Fig. 136 Radio operation: station list.

With the radio turned on, press the **RADIO** button. Radio mode turns on.

The following options are available:

- return to the memorized radio station.
- Seek next station.
- Memorize the tuned broadcasting stations.

The currently tuned in radio station is displayed in the centre of the display. For stations with RDS the station's name can be displayed instead of its frequency, such as **RADIO 21**, in case of good reception.

Function buttons on the radio's main menu

Function button: effect	
	Radio frequency range indication.
	Select the desired frequency range.
	Opens the list of radio stations currently available → page 165.
	Opens the adjusted frequency scale (frequency range) → page 165.
	Opens the current frequency range settings menu → page 166, <i>Radio Settings</i> .
	Change between stored or available stations.
	Arrow button settings in menu → page 166, <i>Radio Settings</i> .
	Station buttons to store stations → page 164.
	Updating the frequency range's stations list → page 165.
	Function button that only becomes visible with the SCAN function is selected → page 166.
	Press the control button to start the SCAN function → Fig. 126(4).
	Canceling a function.
	Deactivation of a function.

Radio Data System RDS

RDS (Radio Data System) is a radio data system via the additional FM services whereby it is possible to display the station's names and radio texts.

RDS is not supported by all devices and may not be available everywhere and for all FM radio stations.

Without RDS basically no **additional services** are possible.

Radio text (RDS)

Some RDS enabled stations also broadcast additional text information – known as radio text.

Radio text is displayed on the upper half of the screen above the station buttons → Fig. 135 (A).

 The radio stations are responsible for the broadcast information content.

Station buttons



Fig. 137 The radio main menu.

In the main menu: *RADIO*, the currently selected frequency band stations can be stored in 15 numbered frequency tracks. These function buttons are referred to as "Station buttons".

Station button functions → Fig. 137

	Touch the station button corresponding to the desired station.
Access stations through station buttons	Stored stations can only be touched after accessing through station buttons and when available in the current location.
Change the station button group	Swipe the display in the station button area → Fig. 137, from right to left or from left to right. The station buttons are displayed in groups of 5 function button pads (1 to 5), (6 to 10), and (11 to 15).
Store stations in station buttons	See: storing stations → page 165.

Specific radio indications, menus and symbols



Fig. 138 The radio main menu.

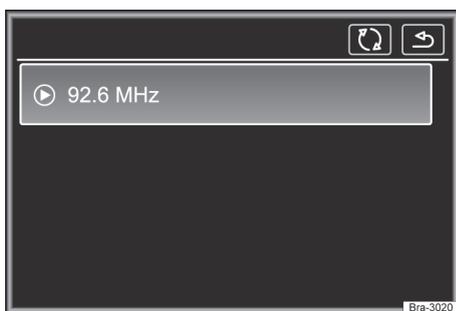


Fig. 139 Radio operation: updatable radio station list (AM).

Function button pads and their respective meaning on the radio → Fig. 138 and → Fig. 139:

	Touch the function button or → Fig. 138.
Select the station using the arrow buttons /	Depending on the arrow button settings, the function switches between stored and available stations. Arrow button settings in the Radio settings → page 166 menu.
Select a station from the radio station list.	Touch the function button → Fig. 138 to open the list of stations. Search list and touch to select the desired station.

Function button pads and their respective meaning on the radio → Fig. 138 and → Fig. 139:

	Touch the function button → Fig. 139 to close the list of stations. If no action is made, the radio station list automatically closes after a while.
Update the radio station list	The radio station list can be manually updated with the → Fig. 139 function button.

Manually set the station frequency

Introduce the frequency range	Touch the function button → Fig. 138.
Step-by-step instructions to change the frequency	<i>Turn</i> the settings knob. OR: touch the right or left frequency range arrow buttons.
Quick scan through the frequency range	<i>Touch</i> one of the arrow buttons in the upper part of the display area → Fig. 138. The next available station is automatically selected. OR: <i>press and hold</i> one of the arrow buttons → Fig. 138 on the top of the display. After <i>releasing</i> , the next radio station available will be automatically selected. OR: press and hold the frequency range and slide to move it.

Hide the frequency range	<i>Briefly</i> press the settings knob. When a station is selected through the station button, the manual frequency selection is also closed. If no action is made, the frequency range automatically closes after a while.
--------------------------	---

Store stations

Store the current station into a station button	<i>Press and hold</i> the desired station button → Fig. 138 until an audible warning is heard. The currently played station will be stored in this station button.
Storing stations from the station list in	Touch the function button → Fig. 138 or <i>turn</i> the settings knob to open the list of station buttons.

Store stations

Stations already stored to station buttons are identified in the station list by the ☆ symbol.

Press and hold the display to select the desired station.

Touch the desired station button in which the station must be stored.

An audible warning is heard and the station is stored in the station button. Repeat this procedure to store other stations from the station list.

Delete stored stations

All stations stored in the **Radio Settings** menu can be deleted individually or all at once → page 166.

SCAN



Fig. 140 Radio mode: ongoing SCAN.

By selecting the SCAN function, all stations available are played for approximately 5 seconds.

SCAN will be displayed on the screen.

Starting and stopping the scan function

Starting the scan function

Briefly press the settings knob.
OR: touch the surface function  and select **SCAN**.

Touch the **SCAN** function button to stop the scanning.

The automatic scan function is also interrupted whenever a station is manually selected by the station buttons.

Radio Settings

- Select the desired frequency range.
- Touch on **RADIO**, to toggle frequency ranges.
- Touch  to open the desired settings.

Function button: effect

Scan: automatic SCAN. By selecting the SCAN function, all stations available in the current frequency range are played for approximately 5 seconds → page 166.

Sound: sound settings → page 182.

Arrow buttons: select settings for the arrow buttons  and . Settings are applied to all frequency ranges (FM).

Memory: the arrow buttons are used to change **all stations stored** in the selected frequency range.

Search station: the arrow buttons are used to change **all tuneable stations** in the selected frequency range.

Delete memory: deletes all or some stations stored.

 **All:** all stored stations are deleted.

Media mode

Introduction

“Media sources” are referred to as audio sources that contain audio data in different data storage units, such as external MP3 Players or audio files. These audio files may only be played by the respective units or audio inputs of the radio system (USB port, Bluetooth® interface, SD card or AUX-IN multimedia port).

Copyrights

Audio and video files stored in data media may be subject to applicable national and international copyright and data protection laws. Legal provisions must be followed.

 This product is protected by copyrights of Microsoft Corporation. This technology may not be reproduced or marketed without prior authorization from Microsoft or one of its authorized affiliates.



Volkswagen takes no responsibility for damaged or lost files.

Limitations and recommendations regarding data carriers

Dirt, high temperatures and mechanical damage may render a data carrier useless. Pay attention to the data carrier manufacturers instructions.

The difference in data carrier quality from different manufacturers may cause playback interferences.

The configuration of a data carrier or the devices and programs used to record the data may result in some titles or data carriers being unreadable. Information on the best ways to create audio files and data carriers (rate of compression, ID3-tag etc.) can be found, for example, on the Internet.

Due to the size, use (number of copies and deletions), of the structure of the folders and file type of the used data carrier the reading time may vary substantially.

A **playlist** only defines a certain playback sequence. Files are **not** memorized on the playlists. The playlists are **not** played back when the files on the data carrier are **not** saved where the playlist is looking for them (path related data).

Data base and file prerequisites

Only 32 mm x 24 mm x 2,1 mm (1,26 x 0,94 x 0,083 inch) or 1,4 mm (0,055 inch) SD cards can be used on the radio.

Media source	Playing requirements
--------------	----------------------

SD and MMC cards of up to a max. of 2 GB (Gigabytes) with FAT16, FAT32 and exFAT file systems.

– MP3 files (.mp3) with 32 to 320 kbit/s or variable bit rates.

– WMA files (.wma) up to 9.2 mono/stereo without copy protection.

– M3U, PLS, ASX and WPL format playlists.
– Playlists with no more than 20 kB and 1000 records.

– File names and paths of up to a max. of 256 characters.

SDHC cards of up to a max. of 64 GB with FAT16, FAT32 and exFAT file systems.

SDHC cards of up to a max. of 256 GB with FAT16, FAT32 and exFAT file systems.

USB data storage unit according to USB 1.X, 2.0, 3.0 specification and FAT16, FAT32 and exFAT file systems.

iPods™, iPads™ and iPhones™ of different generations^{a)} (Only with Apple Dock or Lightning connector).

External audio source playback via the USB port.

– External data storage unit in the USB → → page 171.

Audio file reproduction via Bluetooth®.

– External Media Player must support Bluetooth® A2DP profile → page 174.

External audio source playback through the AUX-IN port.

– 3.5 mm jack plug for audio output → page 172.

^{a)} iPod™, iPad™ and iPhone™ are trademarks of Apple Inc.



Do not use any SD card adapter.



An SD card with navigation data cannot be used as storage for other files, the saved files are not recognized by the radio.



Volkswagen may not be held liable for damaged or lost files in data media.

Audio data storage unit playback sequence

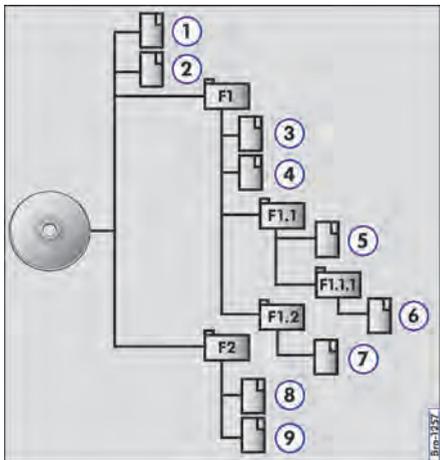


Fig. 141 Possible structure of a data storage unit.

In data storage units, audio files are often organized into data folders and playlists in order to define a certain playback sequence.

Tracks, folders, and playlists are classified numerically and alphabetically according to the name of the data storage unit.

The figure → Fig. 141 shows a typical data storage unit containing tracks, folders and subfolders.

Thus, the tracks and folders of this data storage unit are played and displayed in the following order¹⁾:

1. Tracks ① and ② in the Root directory of the CD
2. Tracks ③ and ④ in the **first** folder F1 of the root directory (display: □01).
3. Track ⑤ in the **first** subfolder F1.1 of folder F1 (display: □02).
4. Track ⑥ in the **first** subfolder F1.1.1 of subfolder F1.1 (display: □03).
5. Track ⑦ in the **second** subfolder F1.2 of folder F1 (display: □04).
6. Tracks ⑧ and ⑨ in the **second** folder F2 (display: □05).

i The playback sequence can be modified by selecting different playback modes → page 169.

i Playlists are **not** played automatically, but must rather be individually selected in the track selection menu → page 170. ◀

Media main menu

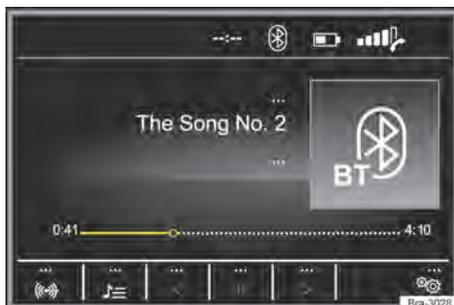


Fig. 142 Media main menu.

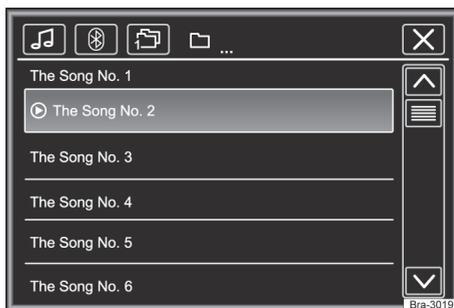


Fig. 143 Radio operation: station list.

In the main menu: Different media sources can be selected and played through **MEDIA**.

- Press the **MEDIA** button to open the **MEDIA** main menu → Fig. 142.

The last media source played is resumed.

Currently played media source is shown in the lower left function button pad → Fig. 142.

The **MEDIA** main menu shows a message if no media source can be selected. ▶

¹⁾ In the Media settings menu, the function Mix/Repeat, including subfolder must be enabled → page 170.

Media main menu function button pads

Caption for → Fig. 142 and → Fig. 143:

Songs, files and playlists can also be ticked off turning the menu button and accessed or opened pressing the button.

Shows the currently selected media source. Touch to select a different media source → page 169.

 SD Card): memory card → page 170.

 USB): external data storage unit in the USB port → page 171.

 BT Audio): Bluetooth® audio → page 172.

 AUX): external audio source connected to the AUX-IN multimedia port, depends on the vehicle's version → page 172.

 Shows the playback list → page 170.

 /  Changes tracks in media mode → page 169.

 Playback is interrupted. The function button  changes to  → page 169.

 Playback is resumed. The function button  changes to  → page 169.

 Open the **Media settings** menu → page 170.

Touch to switch between available modes.

: repeat current tracks.

: repeat all tracks.

 All tracks in the same memory level as the current track will be repeated. In the **Media settings**  menu, **Mix/Repeat including subfolder** enabled, subfolders are also included → page 170.

Mix function. The function button  changes to .

 All tracks in the same memory level as the current track will be included. In the **Media settings**  menu, **Mix/Repeat including subfolder** enabled, subfolders are also included → page 170.

Change media source

- On the **MEDIA** main menu, press the radio's  button again, to go over all the available media sources.

In the pop-up window there are currently no selectable media sources shown as inactive (grey a).

The media source currently in use is displayed on the screen.

If no media source can be selected, such is indicated on the **MEDIA** main menu.

If a media source previously played back is selected again, the playback starts at the point where it was last interrupted.

 The track information display can be disabled in the **Playlist** → page 170.

Change the track on the media main menu

The tracks of the media sources being played back can be successively run through with the arrow buttons → page 170, *Track selection from the track list*.

It is **not** possible with the arrow buttons to switch to playback from a playlist. Playback from a playlist needs to be manually started from the track selection menu → page 170, *Track selection from the track list*.

Operation through the media main menu

Action	Effect
<i>Briefly touch the function button</i> 	Within less than 3 seconds of the track's length, switches the beginning of the previous track.
<i>Briefly touch the function button</i> 	Within more than 3 seconds of the track's length, switches to the beginning of the current track.
<i>Press and hold the function button</i> 	To the next track. After the last track, it returns to the first track of the current data storage unit.
<i>Press and hold the function button</i> 	Fast rewind.
<i>Press and hold the function button</i> 	Fast forward.
Touch the function button  once, <i>briefly</i> .	Playback is interrupted. The function button  changes to  .
Touch the function button  once, <i>briefly</i> .	Playback is resumed. The function button  changes to  .

Track selection from the track list

To open the track list in the *MEDIA* main menu, press  **OR** turn the knob. The track about to be played back is highlighted.

Search the track list and touch on the desired track. When track information is available, the track number and name or the names of the files (MP3) are displayed instead of the **Title + no.** ¹⁾. The track title list may not be supported by the source.

 Tracks, folders and playlists can also be marked, by turning the settings knob, and accessed/opened by pressing the knob.

Specific media settings

Opening the Media settings menu

In the *MEDIA* main menu, touch the  function button.

Function button: effect

Sound: opens the **Sound settings** menu → page 182.

Mix/Repeat, including subfolders: subfolders are included in the selected playback mode → page 168.

Bluetooth: opens the **Bluetooth settings** menu.

Remove: remove the data unit (USB data storage unit or SD card) from the system. The respective function button is disabled after the data storage unit is successfully removed.

Wired or wireless connections

Introduction

Some external devices can be connected to the radio with or without wires (if existing) in the vehicle.

The type and number of connections with or without wires depend on the country and the vehicle. Within a range of different models and in special models the connections may reveal differences.

For the wired connections use only original cables from the device or - if available - the factory supplied cables for the respective vehicle. 

SD card slot

Only 32 mm x 24 mm x 2,1 mm (1.26 x 0.94 x 0.083 inch) **or** 32 mm x 24 mm x 1.4 mm (1.26 x 0.94 x 0.055 inch) SD cards can be inserted into the SD card slot → Fig. 126 .

Only supported audio files are shown → page 167. Other file types are ignored.

Inserting an SD card

Insert the SD card carefully into the SD card slot with the chamfered edge up and the inscriptions to the left (contact surfaces downward).

If the SD card cannot be inserted, check the insertion position and the SD card.

Ejecting the SD card

To prevent data loss, an inserted SD card **must** be prepared for ejection by the following procedure:

▶  **SETUP** ▶  **Safely remove.** ▶  **SD card.**

Next, press the inserted SD card. The SD card “jumps” into ejection position and can be removed. 

Unreadable SD card

When a memory card with unreadable data is inserted, a corresponding message is shown on the radio's display.

 Volkswagen is **not** responsible for SD cards and same are not offered together with the radio. It is necessary to have an SD card to use it on the radio.

 Do not use any SD card adapter.

 An SD card with navigation data cannot be used as storage for other files, the saved files are not recognized by the radio. 

¹⁾ Depending on the source.

Playback of an SD card

- Carefully insert the SD card into the SD card slot with the chamfered edge up and the inscriptions to the left of the SD card slot → Fig. 126 ⑥.
- To remove the SD card, first see the system settings and execute the **Safely remove source** action. Briefly touch the SD card so it “springs” out to removal position.
- Press the radio **MEDIA** button.

Playback is taken up from the last used media source. To playback the SD card, press **□**.

When navigating the folders, use the **↔** function button and the knob. Press **↔** to go to the higher level of the folders and rotate the selector button to select the desired folder.

To change to the next or previous track, press one of the function buttons.

Keep one of the arrow buttons pressed for a few seconds to move the playback forward or backward.

During playback of the SD card, some function keys are available at the bottom of the display. The active buttons are highlighted.

USB Connection

The USB multimedia port is located on the front part of the device → Fig. 126 ⑤.

Audio files on an external data storage unit connected to the USB port  can be played back and controlled by device.

USB data manual are referred to in this manual as external data media, which contain playable files (e.g. MP3 player, iPods™ and pen drives).

Only supported audio files are shown. Other file types are ignored.

Playback begins automatically if there are stored and readable audio files in the data storage units.

The additional external data storage unit controls (access track changes, track selection, and playback modes) are detailed in the respective chapters.

Instructions and restrictions

The number of USB ports  and compatibility with Apple™ devices, among other Media Players, may vary depending on the equipment.

The typical USB voltage of 5 V is supplied through the USB  port.

External hard drives with capacity for over 32 GB must be reformatted into the FAT32 file system, depending on the conditions. Programs and instructions to perform such formatting process are available on the Internet, for example.

Considering the wide range of different data storage units and various iPod™, iPad™ and iPhone™ generations, it is impossible to ensure that all functions will be available.

iPod™, iPad™ and iPhone™

Depending on the country and equipment version, iPods™, iPads™ or iPhones™ may be connected to the vehicle's USB port , through a suitable USB cable, and used as audio sources.

Disconnect

Connected data storage units **must** be prepared for removal before being disconnected.

- ◀ – In the MEDIA main menu, touch the **⊞** function button to open the **Media settings** menu.
- **OR:** press the **SETUP** radio button.
- Touch the **Safe remove** and then select **⏪ USB**. The function button is disabled after the data storage unit is successfully removed.
- The data storage unit may be disconnected.

Unreadable data storage unit

If a connected data storage unit contains unreadable data, a corresponding message is shown on the device display.

 If an external Media Player is connected **simultaneously** via Bluetooth® and the USB port  to the device, the Bluetooth® audio connection is automatically disconnected after switching to the USB port.

 If a connected device cannot be recognized, remove all connections and reconnect the devices. Check whether the connection cable is working, if necessary.

 In case of operating faults in connected devices, restart the respective device. This usually solves the issue. ▶

 Do not use any memory card adapter, USB extension cord, or USB-Hubs (USB distributors)!

 Refer to the external data storage unit manufacturer's operating manual.

Connecting an external audio source to the multimedia AUX-IN port

Depending on the type and version of the vehicle, the voice command feature may not be available.

The AUX-IN multimedia port only supports 3.5 mm jack plugs.

The external audio source connected is played back through the vehicle's loudspeakers and **cannot** be controlled by the device.

Connected external audio sources are indicated by **AUX** on the display.

Connecting an external audio source to the AUX-IN multimedia port

- Reduce the volume on the radio.
- Connecting an external audio source to the AUX-IN multimedia port.
- Start playback on the external audio source.
- Press the radio **MEDIA** button to display the available media sources selection menu → page 186.
- Press the function button **⏮**.

The **playback volume** of external audio sources must be adjusted to the volume of remaining audio sources.

Specificities regarding the use of external audio sources in the AUX-IN multimedia port

Action	Effect
Selection of another audio source on the device.	The external audio source continues to play in the background.
Stop playback on the external audio source.	The unit stays in the AUX menu.
Remove the plug from the AUX-IN multimedia port.	The unit stays in the AUX menu.

 When the playback of the external audio source is finished or is disconnected from the multimedia AUX-IN port, the radio stays on the **AUX** menu.

◀  There may be noise interferences if the external audio source is used on the vehicle's 12 V power outlet.

 Read and follow the external audio source manufacturers operating instructions. ▶

Connecting external audio sources via Bluetooth®

Connecting an audio source via Bluetooth

The Bluetooth® audio mode can be displayed by the  icon in the upper row.

In Bluetooth® audio mode audio files from a Bluetooth® audio source connected via Bluetooth® can be played back (for example a mobile phone), using the vehicle's loudspeakers (audio Bluetooth® playback).

Requisites

- The Bluetooth® audio source must support the Bluetooth® A2DP profile.
- In the **Bluetooth settings** menu, the **BT Audio (A2DP/AVRCP)** function must be enabled → page 181.

Start audio playback in Bluetooth®

- Lower the base volume on the radio .
- Enable Bluetooth® visibility in the external Bluetooth® audio source (e.g. mobile phone).
- Press the radio **MEDIA** button.
- Touch the function button → [Fig. 126](#) and select **BT audio**.
- Touch the **Search device** function button to pair an external Bluetooth® audio source for the first time.
- **OR:** select from the list of external Bluetooth® audio sources.
- **OR:** pair through the **Bluetooth Settings** menu → page 181.
- Follow the instructions for other procedures on the radio display and the Bluetooth® audio source display.

Playback of the Bluetooth® audio source must be initiated manually, if necessary. ▶

Whenever the Bluetooth® audio source playback ends, the device remains in the Bluetooth® audio mode.

Playback control

Control of the Bluetooth® audio source through the device depends on the connected Bluetooth® audio source.

In media readers that support the Bluetooth® AVRCP profile, playback may be automatically initiated or interrupted from the Bluetooth® audio source, if it is switched to Bluetooth® audio playback or other audio sources. In addition a display of the track or a track change is possible through via the device.

 Due to the wide variety of Bluetooth® audio sources, some of the functions described herein may not operate properly.

 To operate the multimedia mode with the Bluetooth® device connected, read and follow the manufacturers use instructions.

 Use only with devices that support Bluetooth® technology. For further information on Bluetooth® products compatibility contact a Volkswagen dealership or look up on the Internet.

Phone

Introduction

The phone functions detailed below can be accessed through the device when there is an active paired and connected mobile phone.

The mobile phone must support the **Bluetooth®** function in order to establish a connection between the mobile phone and the device.

If no mobile phone is connected to the device, phone control will not be available.

Instructions to use mobile phones in vehicles without external aerial connection.

Phone menu displays vary depending on the functions available on the mobile phone model. There may be differences depending on the model used.

Follow the instructions to use mobile phones in vehicles without external aerial connection → page 273.

Use only with units that support Bluetooth® technology. Additional information about products that support Bluetooth® technology may be obtained at Volkswagen Dealerships or via the Internet.

Refer to the mobile phone and accessory supplier's operating manual.

Call interruption and reception flaws may occur in certain "transmission blackout areas".

Most electronic devices are shielded from HF signals (high frequency). In some rare cases, however, electronic devices may not be shielded against the HF signals of phone controls. This may result in damages.

WARNING

Using mobile phones while driving may distract drivers and cause accidents.

- Always drive carefully and responsibly.
- Adjust sound volume settings to allow the driver to hear external warnings and sounds (e.g. emergency service sirens)
- In locations with partial or lack of mobile coverage, and depending on the circumstances (tunnels, garages and underground passages) telephone call may be hindered, preventing the use of mobile devices (including emergency calls).

WARNING

If a mobile phone is not secured or not properly secured in the vehicle, it could be flung through the interior during a sudden driving or braking manoeuvre, or in the event of an accident. This can cause injuries.

- Always attach mobile phones properly and out of airbag triggering areas while driving.

WARNING

Mobile phones can cause interference when positioned nearby heart pacemakers.

- Keep a minimum distance of 20 centimetres between the mobile phone's antenna and the heart pacemaker, since the former may interfere with the latter.

- Do not carry activated mobile phones in chest pockets directly over heart pacemakers.
- Turn off mobile phones immediately whenever there is suspicion of interference with pacemakers.

NOTICE

High speed, unfavourable weather and road conditions, as well as poor network connection may hinder or interrupt mobile phone calls inside the vehicle.

Special precaution areas

Please refer to  and  at the start of the chapter on page 173.

Switch off mobile phones in areas with risk of explosions. Such areas are very common, although not often identified as such →  in *Introduction* on page 173. Some of these areas are:

- Areas with pipes and tanks containing chemicals.
- Lower decks in ships and ferries.
- Areas nearby vehicles powered by liquid gas (e.g. propane or butane).
- Areas with chemicals or other particles such as flours, dust, or metallic dust in the atmosphere.
- Any other area where the vehicle engine must be switched off.

WARNING

Switch off mobile phones in areas with risk of explosion.

NOTICE

Mobile phones must always be turned off in locations in which their use is prohibited. The radiation generated by mobile phones may cause interference with delicate medical and technical equipment, which may hinder or damage such devices.

Bluetooth®

Please refer to  and  at the start of the chapter on page 173.

Bluetooth®

Bluetooth® technology connects mobile phones to the vehicle's phone controls. A single pairing process is required in order to use the phone controls with mobile phones equipped with Bluetooth®.

- ◀ Some Bluetooth® mobile phones are recognized and connected immediately upon switching on the ignition, if such phones have been previously connected. At the same time, the mobile phone and its embedded Bluetooth® feature must be activated, and all active Bluetooth® connections with other devices must be disconnected.

Bluetooth® radio communication is free of charge.

Bluetooth® is a registered trademark of Bluetooth® SIG, Inc.

Bluetooth® Profiles

Whenever mobile phones are connected to the phone controls, data will be exchanged through one of the Bluetooth® profiles.

Phone use via Bluetooth® Hands-Free-Profile (HFP):

- If mobile phones are connected via HFP with phone controls, wireless calls can be made via the hands-free device. In this case, the external aerial *cannot* be used. Instructions to use mobile phones in vehicles without external aerial connection.

Music playback via Bluetooth® Advanced Audio Distribution Profile (A2DP):

- Bluetooth® profile to transfer audio signals with stereo quality.

Playback control via Bluetooth® Audio Video Remote Control Profile (AVRCP):

- Bluetooth® profile to display track information and playback controls in mobile devices.

Pair up and connect the mobile phone to the radio

 Please refer to  and  at the start of the chapter on page 173.

In order to operate a mobile phone via the radio unit, both devices must be paired **once**.

Pairing must be performed while the vehicle is stationary.

Requisites

- Ignition switched on.
- Remove the headset connection to the mobile phone if necessary.
- The **Bluetooth**[®] function must be enabled and visible on the phone and radio.
- The **key blocking** feature must be unlocked on the mobile phone.

Follow the owner's manual of the respective mobile phone.

During the pairing process, the mobile phone's keypad must be used. The mobile phone must be prepared for such process.

Initiate mobile phone pairing

- Press the **PHONE** button.
- Touch the **Search phone** function button.

After the process is completed, all names of Bluetooth[®] devices found are displayed.

- Select the mobile phone from the list of Bluetooth[®] devices found.

Then the device and the mobile phone will be connected. Additional mobile phone or radio entries may be required to conclude their connection.

- Confirm successful pairing in the mobile phone, if necessary.

Depends on the mobile phone:

- Insert the PIN code displayed on the radio screen into the mobile phone and confirm.

OR:

- Compare the PIN code shown on the radio display with the PIN code shown on the mobile phone. If the PIN code matches, it must be confirmed in **both** devices.

After successfully completing the pairing process, the main menu **PHONE** is shown and the contact list and list of calls stored in the mobile phone are automatically loaded. Confirm on the mobile phone, if necessary.

The duration of the loading process varies depending on the amount of data stored in the mobile phone. After completing the loading process, the data of the device will be available.

Pairing and connecting mobile phones

Multiple mobile phones can be paired to the device. However, only **one** mobile phone can be connected to one device at any given time.

When turning the radio on, the unit automatically connects to the last mobile phone connected. If it is not possible to connect to the last mobile phone used, the phone control automatically attempts to connect to the next mobile phone in the list of paired phones.

The **maximum** range of a Bluetooth[®] connection is approximately **10 metres**. Active Bluetooth[®] connections are interrupted if such range is exceeded. The connection will be **automatically** re-established as soon as the device is in reach of the Bluetooth[®] range.

 Refer to a Volkswagen Dealership for more information on mobile phone connections and pairing. 

Switching off phone controls

 Please refer to  and  at the start of the chapter on page 173.

- End active calls.
- Switch off the ignition.
- Remove the key from the ignition.
- Switch off the mobile phone.

If the vehicle key remains in the ignition cylinder after switching off the ignition, phone controls **will not** be switched off. Phone controls are only switched off a few minutes later (factory settings: approximately 15 minutes).

 If mobile phones were connected with phone controls, the mobile phone transmission unit remains active after switching off phone controls. Switching of the mobile phone may be required. 

Phone control description

📖 Please refer to ⚠️ and ⌚ at the start of the chapter on page 173.

Some features and settings are only available while the vehicle is stationary and are not supported by all mobile phone brands.

The range of possible settings depends on the country, unit, and the vehicle's equipment specifications.

Phone controls can recognize up to 20 devices.

Respectively, devices can be connected via the Hands-Free-Profile (HFP) and the Advanced Audio Distribution Profile (A2DP).

User profile assignment

Connected mobile phones are stored in the phone controls under a user profile.

Up to 4 user profiles can be assigned in phone controls. If another mobile phone is paired, the profile with longest idle time is automatically deleted.

Contact list, favourite numbers (speed dial buttons) and **User profile settings** menu settings are stored in the user profile.

If a mobile phone is reconnected to the phone controls, the respective settings and data will be available once again.

If a mobile phone's contact list entries are changed while connected, contact list data can be manually updated via the **User profile settings** menu → page 181. The contact list will be automatically updated upon the next mobile phone connection (e.g. during the following vehicle use).

⚠️ WARNING

Loose or unsecured mobile phones may be flung through the interior and cause injuries in case of sudden evasive or breaking manoeuvres or in the event of accidents.

- While the vehicle is in motion, always secure mobile devices properly outside the airbag deployment zones or stow them away safely.

🗣️ Using mobile phones in the vehicle may cause loudspeaker noises.

PHONE main menu

📖 Please refer to ⚠️ and ⌚ at the start of the chapter on page 173.

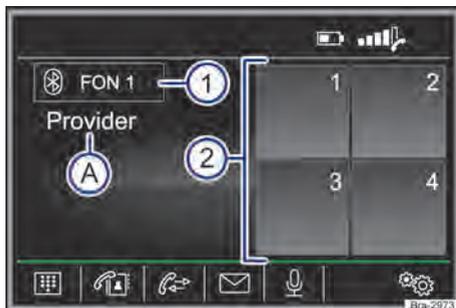


Fig. 144 The telephone main menu.



Fig. 145 Call details.

Opening the Phone main menu

Press the **PHONE** button.

Telephone main menu function buttons

Function button: effect

- ① Name of the paired mobile phone or selected user profile. Touch to connect or pair to another mobile phone.
- ② Favourites (speed dial buttons) to which contact list numbers can be assigned → page 180.
- ☐ Open a numeric keypad to enter a phone number → page 178.
- ☐ Open the contact list of the paired mobile phone → page 178.
- ☐ Open call lists of the mobile phone paired → page 179.
- ☐^{a)} Open the message list (SMS) of the mobile phone paired.

Function button: effect

-  a) Touch the function button to make a phone call with a phone number through voice command.

-  Open the **Phone settings** menu → page 180.

-  Touch to **answer** a call.

-  Touch to **end** a call.
OR: touch to **reject** calls received.

-  Touch to mute sound during a call. Touch the function button  to unmute the sound.

a) Depends on the mobile phone.

Phone control symbols and displays

Display: meaning

-  A Name of the mobile network carrier in which the SIM card of the paired mobile phone is registered.

-  B Stored name or phone number display.

-  Battery charge status of the connected mobile phone.

-  Intensity of the mobile communication transmission signal currently available.

-  Displays an active Bluetooth® connection. <

During a phone call

 Please refer to  and  at the start of the chapter on page 173.



Fig. 146 During a phone call.

When a connection with the dialled phone number has been established, the *PHONE* main menu display switches to *Phone call* → Fig. 146.

Function buttons and displays: action and effect

-  Touch to switch off the mobile phone microphone during a call (the function button  changes to ).

-  A Touch to switch on the mobile phone microphone during a call (the function button  changes to ).

-  B Display of the call duration and call number or stored name.

-  Touch to end a call.

-  Battery charge status of the connected mobile phone.

Functions available during a phone call

Possible functions

- | | |
|--|---|
| Mute mobile phone microphone | Touch the function button  . The mobile phone microphone is muted (the function button  changes to ). |
| Unmute mobile phone microphone | Touch the function button  . The mobile phone microphone is unmuted (the function button  changes to ). |
| Starting phone calls via mobile phone | Touch the  function button and select <input checked="" type="checkbox"/> Hands-free. The hands-free function is disabled and the call is directed to the mobile phone |
| Starting phone calls via the mobile phone controls | Touch the  function button and select <input type="checkbox"/> Hands-free. The hands-free function is enabled and the call is directed to the mobile phone controls. < |

Enter phone number menu

📖 Please refer to ⚠️ and ⌚ at the start of the chapter on page 173.



Fig. 147 Enter phone number menu.



Fig. 148 Enter phone number menu (select contact from the list).

Enter phone number menu functions.

Touch the  function button to access the *Enter phone number* menu.

Possible functions

	Touch the  Voicemail function button to establish a connection.
Call voice mailbox	If a voice mailbox number has not been stored, enter the calling number and confirm by pressing OK . Previously saved call numbers can be edited in the User profile settings menu → page 181.
Enter phone number	Enter phone number via the keypad. Touch the function button  to establish a connection.

Possible functions

Select contact from the list	Enter the first letter of the contact name via the keypad. Possible entries are shown in the contact list. Search the contact list and touch the desired contact to call.
Enter country code	When entering country codes, instead of entering the two first digits (e.g. "00"), it is possible to enter the symbol "+". Touch and hold the function button  for approximately 2 seconds to enter the + character.

Phone contacts list menu

📖 Please refer to ⚠️ and ⌚ at the start of the chapter on page 173.



Fig. 149 Contact Menu (contact list).



Fig. 150 Search mask.

After the first pairing process, it may take a few minutes until the paired mobile phone's contacts¹⁾ become available on the device. This process can take up to approximately one hour, depending on the volume of data to be transferred. Confirm the transmission process on the mobile phone, if necessary.

Contacts can also be accessed during calls.

Opening the Contacts menu

Touch the function button  to access the *Contact list (contacts)* menu.

Possible functions

Select contact from the list	<p>Search the list and touch the desired contact to call.</p> <p>OR: if multiple phone numbers are stored for the same contact, touch the contact and then the desired phone number to call.</p>
Search contacts through the search mask.	<p>Touch the contact surface  → Fig. 149 to open the search mask.</p> <p>Enter the desired name into the search mask → Fig. 150.</p> <p>The appropriate number of events is shown to the right of the search field. Touch the function button to switch to list view.</p> <p>Search the list and touch the desired contact to call.</p>

 Phone menu availability varies depending on the mobile phone used.

Call list menu

 Please refer to  and  at the start of the chapter on page 173.

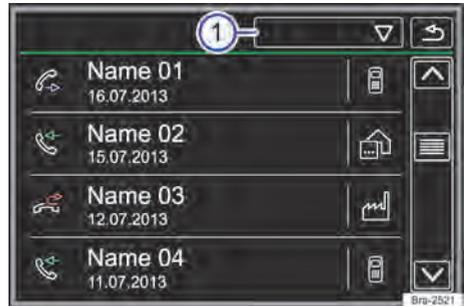


Fig. 151 Call Menu (call lists).

Whenever a phone number is stored as a contact, the stored name will be displayed instead of the call list number.

Opening the Calls menu

Touch the function button  to access the **Calls** menu.

Touch the function button  → Fig. 151 . Select the desired call list: , ,  or .

Display

	[Missed]: displays the numbers of missed and unanswered calls.
	[Dialled]: displays phone numbers selected via the mobile phone and the device's telephone control.
	[Received]: displays numbers of calls taken via the mobile phone and the device's telephone control.

 Call list availability varies depending on the mobile phone used.

¹⁾ Depending on the unit model, only contacts stored in the phone memory are loaded.

Favourites (speed dial buttons)

📖 Please refer to ⚠️ and ⌚ at the start of the chapter on page 173.



Fig. 152 The telephone main menu.

A total of 4 phone numbers from the contact list can be stored as favourites.

All favourite numbers must be assigned manually and then attributed to a user profile.

Favourite functions

Possible functions	
Assign favourite	In the <i>PHONE</i> main menu, touch one of the free function buttons. Select the desired contact from the contact list. If more than one phone number is stored for the desired contact, select the desired number.
Edit favourite	In the <i>PHONE</i> main menu, <i>press and hold the favourite entry</i> until the <i>Contacts</i> menu opens. Select the desired contact from the contact list. If more than one phone number is stored for the desired contact, select the desired number. To close the <i>Contacts</i> menu without applying changes, touch the function button  .

Possible functions

Delete favourite	Favourite entries can be deleted in the <i>User profile settings</i> menu, under the Manage favourites option → page 181.
Call favourite	In the <i>PHONE</i> main menu, briefly touch the function button of the respective favourite contact <i>assigned</i> to call the stored phone number.

 Contacts stored as favourites are not automatically updated. If a contact stored as favourite in the mobile phone is changed, the function button must be reassigned. <

Phone settings

📖 Please refer to ⚠️ and ⌚ at the start of the chapter on page 173.

Open the Phone settings menu

- In the *PHONE* main menu, touch the  function button.
- Touch the function button in which settings must be made.
- Changes are automatically applied after closing a menu.

Function button: effect

Select telephone: select the Bluetooth® device from the list to connect.

Search phone: touch to connect a new Bluetooth® device.

Bluetooth: opens the **Bluetooth settings** menu → page 181.

User profile: opens the **User profile settings** menu → page 181.

Mobile phone reminder: if a Bluetooth® connection with the mobile phone is established, the message “Don't forget your phone” appears after switching off the ignition. <

Bluetooth® settings

📖 Please refer to ▲ and ⌚ at the start of the chapter on page 173.

Open the Bluetooth settings menu

In the **PHONE** main menu, touch the  function button.

OR: press the **SETUP** button.

Then, touch the **Bluetooth** function button.

Touch the function button in which settings must be made. Changes are automatically applied after closing a menu.

Function button: effect

Bluetooth: touch to switch off Bluetooth®. All current connections will be interrupted.

Visibility: switch Bluetooth® visibility on or off.

Visible: Bluetooth® visibility enabled.

Invisible: Bluetooth® visibility disabled. Bluetooth® visibility must be switched on to pair external Bluetooth® devices to the radio.

Name: shows or changes the device name. This name is shown in other Bluetooth® devices under the Bluetooth® settings.

Paired devices: shows the paired device. Disconnect and connect individual Bluetooth® devices and Bluetooth® profiles.

Search devices: search active and visible Bluetooth® devices in range of the device. The **maximum** range is approximately **10 metres**.

BT Audio (A2DP/AVRCP): if an external audio source is to be connected to the device via Bluetooth®, this function must be enabled.

User profile settings

📖 Please refer to ▲ and ⌚ at the start of the chapter on page 173.

Function button: effect

Manage favourites: edit favourites → page 180.

 **All:** all favourites are deleted.

Favourite: touch to delete the stored number.

Free function button: touch to store a contact list number as favourite.

Function button: effect

Voice mail No.: enter or edit the voice mailbox number.

Sort by: set the contact list sorting sequence (**Last name** or **Given name**).

Import contacts: import the contact list of the paired phone or update imported contact lists.

Select a ringtone: select a ringtone from a list of ringtone presets. The ringtone is played and stored after exiting the submenu.

Delete other profiles: delete some or all inactive user profiles.

Settings

Menu and system settings

According to the vehicle version or type the menu and system functions and setting options may vary.

Open the System settings menu

- Press the radio **SETUP** button → ▲.
- Press the function button area of the mode to which the introduction of settings is intended.
- Changes are automatically applied upon closing a menu.

Function button: effect

Sound: adjust sound and volume settings → page 182.

Display: display settings.

Turn display off (in 10 s): if the function is enabled and the device remains idle, the display is automatically shut down after 10 seconds. The display is switched back on by touching the display or pressing a button.

Brightness level: select the display brightness level.

Touchscreen sound: confirmation sound when touching a function button enabled.

Display time in Standby mode: the current time is shown on the display while in Standby mode.

Date/time: to enter date/time settings

Time: manual current time setting.

Function button: effect

Time format: to define the preferred time display format (12 or 24 hours).

Daylight saving time: sets the daylight saving time automatically.

Date: to set the current date.

Date format: to define the preferred date display format (dd-mm-yyyy, yy-mm-dd or mm-dd-yy).

Additional keypad languages^{a)}: select additional keypad languages.

Units: define the units display in the vehicle.

Bluetooth^{a)}: Bluetooth[®] settings → page 181.

Safe removal: remove the desired data storage unit safely from the system. The function button is disabled after the data storage unit is successfully removed.

Default settings: the return to default settings is disabled as selected in the **Entries and settings applied**.

System data: display of system data (unit number, hardware/software versions.)

Update software: update the software version.

Copyright: copyright information.

^{a)} Depending on the unit and the country.

WARNING

Accidents and injuries can occur if the driver is distracted.

- Never proceed with settings while driving.

 To make the best of the radio's features and optimal operation it is important that the date and time be correctly set.

Sound and volume settings

According to the vehicle version or type the sound and volume function and setting options may vary.

Press the **SETUP** button and then select **Sound**.

Function button: effect

Volume: volume settings.

Max. start volume.: set the maximum switch-on volume.

Function button: effect

Speed-dependent volume control: set volume adjustments based on the vehicle's speed. The audio volume is increased automatically as the speed increases.

Entertainment dimmer: set warning volumes.

AUX volume: set the playback volume of audio sources connected to the AUX-IN multimedia port (**Low**, **Medium** or **High**). Also see → page 182, *Adjust playback volume of external audio sources*.

Bluetooth Audio^{a)}: establish the playback volume of audio sources connected via Bluetooth[®] (**Low**, **Medium** or **High**). Also see → page 182, *Adjust playback volume of external audio sources*.

Balance - Fader: set sound equalization.

The grid shows sound equalization inside the vehicle. To edit sound equalization, touch the desired position in the vehicle interior display or use the arrow buttons to sequentially change settings. To centre sound equalization in the vehicle interior display, touch the function button between the arrows.

Bass - mid - treble: set sound characteristics (bass - mid - treble).

Touchscreen sound: confirmation sound when touching a function button enabled.

^{a)} Depending on the country and the device.

Operation mode of the volume increase as a function of speed

The speed-dependant volume increase automatically adjusts the volume based on the vehicle's speed.

The volume increase is set in levels from 1 to 7.

If a low value is set, the volume is slightly adjusted at higher speeds, if the set value is high, the volume increases sharply. At level 0 the volume increase as a function of the vehicle's speed is disabled.

Adjust playback volume of external audio sources

Whenever the playback volume of an external audio source must be raised, first lower the default volume of the device.

If the connected audio source has **very low volume**, increase the **output volume** in the external audio source. If this procedure is not sufficient, set the **on volume** to **Medium** or **High**.

If the external audio source connected has **distorted or very high volume**, lower the **output volume** in the external audio source. If this procedure is not sufficient, set the **on volume** to **Medium** or **Low**.

 **WARNING**

Accidents and injuries can occur if the driver is distracted.

- Never proceed with settings while driving.



VW Play

Welcome to VW Play

Get ready for an unforgettable radio experience!

The setup wizard will guide you through a few simple steps to set up your radio. You will set up a user profile, date and time, and connect your radio to Bluetooth® and the Wi-Fi network. Follow the instructions and select **Need help?** if you have any doubts.

⚠ WARNING

Initial settings require attention and time and must only be performed while the vehicle is parked.



If there is no Wi-Fi connection available, some of the radio features cannot be configured during the initial setup.

Device overview



Fig. 153 Overview of controls (variant 1).



Fig. 154 Overview of controls (variant 2)

The radio is supplied in different versions of the device which are distinguished from each other by its group of functionalities, inscriptions and button functions as well as by the lay out of the controls.

- ① **Display:** touchscreen.
- ② **Home screen shortcut:** back to home screen.
- ③ **Phone:** press to open the phone interface.
- ④ **Media:** press to open the radio and media interface.
- ⑤ **Power:** press to enable the mute feature. Hold for 3 seconds to enable the *stand-by* feature.

- ⑥ **App store:** press to open the application interface.
- ⑦ **Volume:** press the adjust the volume.
- ⑧ **Settings:** press to open the settings.
- ⑨ **Virtual switches:** controls for assist systems, boot lid opening and air conditioning, if available.
- ⑩ **Quick access screens:** → page 185.
- ⑪ **Clock and status icons:** press to change user profile information. If connected, status of the Bluetooth® and Wi-Fi connection, phone battery status, and mobile network signal information.

Quick access screens

To facilitate home screen browsing, the user can access menus through shortcuts. There are three shortcut combinations available:

To configure the quick access screen, hold the quick access screen for three seconds and select the best combination.

Home screen shortcuts can access some functions that require Bluetooth® connection, Wi-Fi connection and specific apps.

Radio

Introduction

Follow the national rules and legal provisions when using the radio.

Other additional electric devices connected to the vehicle may interfere with the receipt of the broadcast radio signal and cause noises in the speakers.

i Parking lots, tunnels, tall buildings or mountains may interfere with unit signal reception.

 Metal-coated stickers or films may hinder reception in vehicles with windscreen aerials.

Unit operation



Fig. 155 Main menu: radio.

Open the main menu

Press the media button  and select .

Press the arrow .

Tune into stations

Select a frequency range .

To choose a station, press the arrow buttons  /  to browse through available stations. Or press  and select the desired station in the frequency range.

The user can also enter the number of the desired station, press , enter the station number and press .

Store stations

The currently tuned in radio station is displayed in the centre of the display.

To store a station, turn into the station and press . The stored station will appear in a position on the bottom of the display. Briefly press the button to access the station.

Up to 6 stations can be stored for each user profile.

Replace stored radio stations



To replace stored radio stations, tune into the station and briefly press the position to store the new station.

Scan

To scan stations in the  menu, press  and press .

Or press a media button  and then .

Delete stored stations

To delete stored stations, press the Settings button , in the  menu, select  and press .

Media

Introduction

“Media sources” are referred to as audio sources that contain audio data in different data storage units, such as external MP3 Players or audio files. These audio files can only be played by the respective units or through the respective radio system's audio input ports/interfaces (USB port or Bluetooth® interface).

Copyrights

Audio and video files stored in data media may be subject to applicable national and international copyright and data protection laws. Legal provisions must be followed.

 Volkswagen takes no responsibility for damaged or lost files.

File and database requirements

Supported listed file formats are simply referred to as “audio and video files”.

Media source	File system	Playing requirements
Data storage unit specified as per USB 2.0	FAT16, FAT32, NTFS, exFAT, Ext3 and Ext4	<ul style="list-style-type: none"> – Audio files MP2 (.mp2), APE (.ape), OGG (.ogg), OGA (.oga), OPUS (.opus), MP3 (.mp3), WMA (.wma), WAV (.wav), FLAC (.flac), and AAC (.aac). – Video files WMV (.wmv), MKV (.mkv), MOV (.mov), AVI (.avi) and MP4 (.mp4). – At most 2.000 elements per folder level. – Max. 20,000 audio and video files per data storage unit. Max. size of a FAT32 data system file: 4GB.
Audio file reproduction via Bluetooth ^{®a)} .		– External Media Player must support Bluetooth [®] A2DP profile.
External audio source playback via the USB port.		– External data storage unit in the USB  .

a) Bluetooth[®] is a registered trademark of Bluetooth[®] SIG, Inc.

 Volkswagen may not be held liable for damaged or lost files in data media.

Media operation



Fig. 156 Main menu: Media.

Open the main menu

Press the media button  and select the desired media source. Press the arrow \wedge .

The following media sources are available:

-  USB: external data storage unit in the USB port.
-  Phone: Bluetooth[®] audio.

Basic functions

- To browse through media tracks, press the  /  buttons.
- To stop playing media, press .
- To resume playing, press .
- Media can be sorted by artist, album, songs, genres and video files.

Random mode

Random audio playback.

Repeat mode

- To repeat all tracks, select .
- To repeat only the current track, select .

NOTICE

The screen is blocked for video playback and games while driving.

Connect

Bluetooth[®]



Fig. 157 Connect via Bluetooth.



Fig. 158 Phone function.

Connection via Bluetooth®

- To connect the Bluetooth®, press the settings button and touch **Connect**.
- Press **Devices** and then select "Add device".
- The radio unit will automatically search for devices available (turn on Bluetooth® visibility in on your device). For more information, refer to the audio device's instruction manual.
- To establish a connection, select the name of the device to connect. Compare the code shown on the radio display and the code shown on the mobile phone. If the code matches, confirm the code to connect.
- Depending on the radio version, 2 devices can be connected simultaneously. To define the function on the device, select the phone button to use phone functions and select the media button to use media functions → Fig. 157.

Bluetooth® audio function

To enable Bluetooth® audio mode, the audio button must be active after connecting. In this mode, audio files from audio sources connected via Bluetooth® (e.g. mobile phone) will be played on the vehicle's loudspeakers.

After connecting to a Bluetooth® audio source, follow the functions in the Media menu → page 187.

Phone function

Phone menu displays depend on the functions available on the used mobile phone model. There may be differences.

To enable Bluetooth® phone mode, the phone button must be active after connecting. In this mode, the user can access phone contacts, make and receive calls using the vehicle's loudspeakers.

Receiving phone calls:

- Press to receive a phone call.

Making phone calls:

- In the phone function , enter the number to call and press .
- Or open the contact list by pressing the contacts button . Select the contact to call and press .
- To search through the contact list, press the contacts button and enter the desired name on the top bar **Search contacts**.

During a phone call:

- Press to mute the microphone during a phone call. Press again to unmute the microphone.
- Press to mute the loudspeakers
- Press to place an active call on hold. The user can make or answer other calls with a call on hold.
- Press to resume the call on hold.
- Press to open the keypad.
- To end a call on hold, press the hang up button .



Up to 1,000 contacts can be synchronized via Bluetooth® connection.



Fig. 159 Connect Wi-Fi.

Connect to Wi-Fi network

- To connect Wi-Fi, press the settings button and touch **Connect**.
- Slide the selector to enable the Wi-Fi connection; the radio will automatically scan all available networks.

- Select the name of the desired Wi-Fi network. In case of a secure Wi-Fi network, enter the password and press ✓.
- After connecting, the icon  will appear on the top left corner.

Forget network

Once the radio connects to a Wi-Fi network, it will automatically connect to the same network whenever it is available.

To avoid automatic connection, touch **Forget network** in the connected network, in order to end the connection.

App store

Introduction

The App store may not be available in all countries.

The app store is the right tool to search and download the perfect applications for your daily routine.

Some applications are factory-installed.

Before using applications, read the respective use terms and privacy policies.

App store

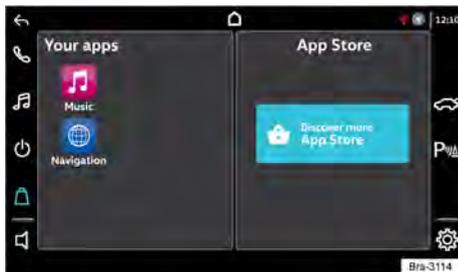


Fig. 160 App store.

To download applications on the App store, the user must be connected to a Wi-Fi network and logged with the Volkswagen ID.

To sign up for a Volkswagen ID, access the VWID login page or the **My Volkswagen** application and fill out all registration information required.

To log in, press the **App-store**  menu or drag the screen to the left twice to open the quick access screen, press **Start session** or read the code with the phone camera.

After logging in, the information is loaded on the home page.

Download applications

- Search for the application you want to download.
- Select the application and press **Download**.

The download will begin and the status will be shown on the top corner of the page. Press **Cancel** before the download is completed to cancel.

After the download ends, press **Open** to open the application and its features. Installed applications are available on the left-hand side of the screen.

Basic functions

- Press **My Apps** to access installed apps.
- Press **Settings** to access App-store settings. In this section, the user can check the App-store software version and the use terms and conditions.
- To update installed apps, press **Update** to check for available updates.
- To delete installed apps, select the **Settings**  menu, select the app to delete in the **Apps** item and press **Uninstall**.

NOTICE

Videos and other functions that may distract the driver are blocked while the vehicle is in motion.

Apple CarPlay™

Apple CarPlay™ Menu

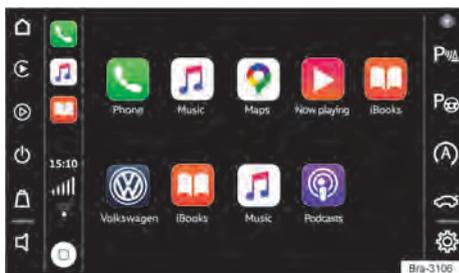


Fig. 161 Apple CarPlay™ Menu.

Establish connection

To use Apple CarPlay™ the mobile phone **must** support Apple CarPlay™.

Connection can be made via Bluetooth® or USB cable, depending on the mobile device's version.

When a mobile device is connected for the first time follow the instructions on the radio display and on the display of the mobile device.

Confirm the use of Apple CarPlay™ on the mobile device and the radio display.

End connection

- For connections via USB cable or turn off Wi-Fi connection.
- For Bluetooth® or wireless connections: follow the instructions shown on the mobile phone.
- Reconnecting to the Wi-Fi network also ends the Apple CarPlay™ connection → page 188.

Specificities

During an active Apple CarPlay™ connection, the following features are enabled:

- If connected with a USB cable, Bluetooth connections between mobile devices and the radio are **not** possible.
- Phone functions are possible through Apple CarPlay™ and through the radio's phone function.
- If connected via wireless Apple CarPlay™, Wi-Fi connection is unavailable.
- Apple CarPlay™ functions may be limited while driving.

- An active Apple CarPlay™ device cannot be used as a media device on the Media menu.
- Navigation routes are not shown on the instrument cluster display.

NOTICE

Apple CarPlay™ is a software platform from Apple that allows you to access certain applications and features on your mobile phone through your car's Infotainment System touchscreen or mobile phone's voice assistants. Once connected, Apple CarPlay™ mirrors a simplified version of the mobile phone interface optimized for driving. All the generated image and displayed functionalities are controlled by the mobile phone itself in this situation. Therefore, any situation that influences the performance of the mobile phone will directly affect the performance on the Infotainment screen, causing the impression that the Infotainment is faulty, when in fact the functions controlled by the vehicle are operating normally.

- For more information, refer to the mobile device's owner's manual.

Android Auto™

Android Auto™ Menu



Fig. 162 Android Auto™ Menu

Connect

To use Android Auto™ the mobile phone **must** support Android Auto™.

Depending on the mobile phone used, it is only possible to connect via the USB cable.

Depending on the version of the radio and mobile device, it is possible to connect via Bluetooth® or USB cable.

Depending on the mobile version, a suitable application needs to be installed to use the Android Auto™ in the device.

When a mobile device is connected for the first time follow the instructions on the radio display and on the display of the mobile device.

Press the radio button  to access Android Auto™ functions.

To access radio controls, press the home screen shortcut .

End connection

- For USB cable connections: remove USB cable
- For Bluetooth® connections: follow the instructions shown on the mobile phone.
- To return to the home screen, press .

Specificities

During an active Android Auto™ connection, the following features are enabled:

- An active Android Auto™ device may be simultaneously connected to the radio via Bluetooth.
- Bluetooth connections between mobile devices and the radio are **not** possible.
- Telephone functions are possible via Android Auto™. When the Android Auto™ device is simultaneously connected via Bluetooth to the device, the phone function can also be used.
- Simultaneous phone calls via Android Auto™ and via the radio are **not** possible.
- An active Android Auto™ device cannot be used as a media device on the Media menu.
- Navigation routes are not shown on the instrument cluster display.

NOTICE

Android Auto™ is a software platform from Google that allows you to access certain applications and features on your mobile phone through your car's Infotainment System touchscreen or mobile phone's voice assistants. Once connected, Android Auto™ mirrors a simplified version of the mobile phone interface optimized for driving. All the generated image and displayed functionalities are controlled by the mobile phone itself in this situation. Therefore, any situation that influences the performance of the mobile phone will directly affect the performance on the Infotainment

screen, causing the impression that the Infotainment is faulty, when in fact the functions controlled by the vehicle are operating normally.

-  For more information, refer to the mobile device's owner's manual.

Settings

Introduction

The range of possible settings depends on the country, unit, and the vehicle's version.

System settings



Fig. 163 Settings menu.

Open the Settings menu

- Press .
- Select the function for the area for which the settings are to be set. Changes are automatically applied after closing a menu.

Function button: effect

 (System): system settings.

 (Bluetooth): Bluetooth® settings.

 (Visibility): make the Bluetooth® device visible or hidden.

 (Bluetooth name): show or change the device name.

 (Device manager): shows paired devices. Disconnect and connect individual Bluetooth® devices and Bluetooth® profiles.

 (Phone): phone settings.

 (Bluetooth): Bluetooth® settings.

Function button: effect

Ringtone: ringtone settings.

Audio: volume and tone settings.

Sort contacts: sort contacts by first and last name.

Phone reminder : if a mobile phone is connected via Bluetooth®, the message "Don't forget your phone" is shown after switching off the ignition.

Audio: volume settings.

Maximum call volume: to set the maximum initial volume.

Speed-dependent volume: set volume adjustments based on the vehicle's speed.

Navigation warning: sets the volume of the navigation system's directions.

Entertainment dimmer (parking): set the audio playback volume while the parking aid sender is activated.

Ringtone volume: set the ringtone volume.

Media sound: establish media volume.

Phone sound: set phone volume.

BT audio volume: set the Bluetooth® audio volume.

Tone: tone settings.

Equalizer: sound equalization settings.

Balance and Fader: sound distribution settings. The grid shows the current point of balance of the sound inside the vehicle. To change sound distribution, touch the desired position in the vehicle interior display or use the arrow buttons to sequentially change settings. To centre sound distribution in the vehicle interior display, touch the function surface between the arrows.

Touchscreen sound : enable or disable confirmation sound when touching a function button enabled.

Display: display settings.

Turn display off (in 10 s) : if the function is enabled and the device remains idle, the display is automatically shut down after 10 seconds. The display turns back on by touching the screen.

Brightness: to display brightness settings.

Function button: effect

Skins: depending on the vehicle version and mode, radio colour combinations can be changed. In this case, open the App store and download new skins.

Touchscreen sound : enable confirmation sound when touching a button on the screen.

Automatic Valet mode : when the door is opened and whenever the key is far from the vehicle, Valet mode is automatically enabled → page 193.

Safe removal: remove the desired USB data storage unit safely from the system. The respective function button is disabled after the data storage unit is successfully removed.

Wi-Fi: Wi-Fi network settings.

enable and disable the Wi-Fi network.

Manage stored networks: settings of stored Wi-Fi connections.

Generate security key: generate a new Apple CarPlay™ wireless connection key.

Find hotspot: search new network connections.

Units: define measurement units.

Language selection: select the desired language.

Date and time: date and time settings.

System data: display of system data (unit number, hardware/software versions).

Welcome video: watch the welcome video again.

Reset system: reset all or specific settings to factory-settings.

Copyright: copyright information.

Car: vehicle function settings.

Stability control (ESC): activate and deactivate stability control.

Light settings: configure the functions of the lights.

Date and time: date and time settings.

Mirrors and wipers: make settings for mirrors and wipers.

Dashboard: carry out configurations of the functions of the dashboard.

Service settings: access information about the inspection service.

Tires: setting the tire indicators. ▶

Function button: effect

Assistance systems: activate and deactivate the assistance systems.

Opening and closing: configure the door opening and closing functions.

Units: define measurement units.

Parking and manoeuvring: configure the parking functions.

Vehicle valet status: enable and disable valet mode.

Factory setting: reset vehicle functions to factory settings.

Media: to make media adjustments.

Audio: volume settings.

Bluetooth: Bluetooth® settings.

Radio settings: radio station settings.

Scan stations: scan stations available in the current frequency range.

Arrow buttons: adjust arrow buttons < and > to switch to the next station in the frequency range or the next stored station.

Delete presets: delete all stored stations.

Safe removal: remove the desired USB data storage unit safely from the system. The respective function button is disabled after the data storage unit is successfully removed.

Apps: app settings.

Sort by: sort apps alphabetically or by installation date.

App management: manage installed apps. Apps can also be deleted in this section.

Wi-Fi: Wi-Fi network settings.

Notifications: vehicle status data.

Settings menu shortcuts

There are shortcuts for some settings on the main page of the Settings menu

- **Screen OFF**: place screen in *stand-by*.
- **Audio**: open audio settings.
- **Connect**: connection settings.
- **Profile**: edit profile settings → page 194.
- **Lights**: edit vehicle light settings.
- **Valet mode**: enable valet mode → page 193.
- **Brightness**: screen brightness settings.

Reset system

To reset the system, press **Settings** and in the **System** menu, press **Reset system**.

It is possible to reset all settings or each setting individually.

Search

When in doubt, use the search bar in the **Settings** menu.

The search will return the most relevant topics related to the keywords entered.

! WARNING

Accidents and injuries can occur if the driver is distracted.

- Never proceed with settings while driving.

! WARNING

Never reset the system while driving.

i To make the best of the radio's features and optimal operation it is important that the date and time be correctly set.

Valet mode



Fig. 164 Automatic valet mode activation.



Fig. 165 Valet mode lock screen.

The valet mode locks the radio and can be activated automatically or manually.

Activate valet mode through the **Settings** menu: press **Screen** and select **Automatic valet mode**.

When activated, the radio will be locked 10 seconds after opening the driver door with the engine on → [Fig. 164](#). In keyless vehicles, the radio is locked immediately as the key moves away from the vehicle with the engine on. Enable this feature for greater convenience and security.

If you forget the PIN code, all factory settings and data must be reset. To reset, press **Reset all data and settings** on the display.

PIN code configuration

To configure the PIN code, open the **Settings** menu and select **Valet Mode**. Edit the PIN code on the **Settings** menu and then access the **Profile** and select **Edit PIN code**.

The PIN code must contain 4 digits.

Vehicle valet status

During the period when the car's Valet Mode is enabled, the Valet Status function will provide a report of the events that took place with the vehicle.

On the **Settings** menu, open the **Car** menu and select **Vehicle valet status** to enable this feature.

While Valet Mode is enabled, the Valet status function will be available on the radio screen, allowing the driver to monitor the following information → [Fig. 165](#):

- Maximum speed reached.
- Distance travelled.
- Vehicle doors open, except driver door.
- If the rear lid was opened.
- If the bonnet was opened.

When Valet Mode is disabled, this information is deleted.

Add new user profile

Press the avatar picture on the top right corner of the screen or open the **Settings** menu and select **Profile**. Select **Create new profile** and enter the desired name and avatar.

Edit avatar image and name

Press the avatar picture on the top right corner of the screen or open the **Settings** menu and select **Profile**. Next, select **Edit name and avatar**.

Change user profile

The vehicle must be stopped to change the user profile.

Press the avatar picture on the top right corner of the screen or open the **Settings** menu, select **Profile** and select the desired profile. If a PIN code is configured, the PIN code must be entered to change the profile.

Edit PIN code

Open the **Settings** menu, press **Profile**, select **Edit PIN code** and enter the 4 digit code.

User profile

Depending on the radio version, up to 03 user profiles can be configured. The user profile stores memorized radio stations, driving mode (if available in the vehicle), language and applications installed via the VW Play Apps store.

Transporting

Stowing items of luggage

Heavy objects must always be stowed securely in the luggage compartment and you must ensure that the rear seat backrests are securely engaged in the upright position. Always use suitable securing straps with the fastening rings to secure heavy objects. Never overload the vehicle. Both the payload and the distribution of the load in the vehicle affect driving response and braking distance → .

Stow all items of luggage in the vehicle securely

- Always distribute any loads in the vehicle as evenly as possible.
- Place heavy objects as far forward in the luggage compartment as possible. Position the rear seat backrests securely in the upright position.
- Secure luggage in the luggage compartment to the fastening rings with suitable straps.
- Adjust tyre pressure according to the vehicle load. Refer to the tyre pressure sticker → page 248.
- In vehicles with tyre pressure control system, set the new load conditions when necessary → page 243.

WARNING

Objects that are not secured, or are secured incorrectly, can cause serious injuries in the event of a sudden driving or braking manoeuvre or accident. This applies particularly if objects are struck by the airbag when activated and then flung through the vehicle interior. Please apply the following rules to reduce the risk of accidents:

- Always stow all objects in the vehicle securely. Always stow luggage and heavy objects in the luggage compartment.
- Always use suitable straps to prevent luggage from entering the deployment zones of the side airbag or the front airbag in the event of a sudden driving or braking manoeuvre or an accident.

- Objects should be stowed in the vehicle interior in such a way that they can never enter the airbag deployment zones while the vehicle is in motion.
- Always keep stowage compartments closed while driving.
- Stowed objects must never cause passengers to assume an incorrect sitting position.
- Any seat blocked by stowed objects must not be used by any passengers.

WARNING

The vehicle handling and braking effect may alter significantly if large or heavy objects are being transported.

- Adapt your speed and driving style to suit visibility, weather, road and traffic conditions.
- Accelerate carefully and gently.
- Avoid sudden braking and driving manoeuvres.
- Brake earlier than in normal driving.

NOTICE

Hard objects on the shelf can chafe against the wires of the heating element in the rear window and cause damages.



Observe any information concerning towing loading → page 199, *Towing a trailer*. 

Luggage compartment

Introduction

Heavy objects must always be stowed securely in the luggage compartment and you must ensure that the rear seat backrests are securely engaged in the upright position. Always use suitable securing straps. Never overload the vehicle. Both the payload and the distribution of the load in the vehicle affect driving response and braking distance →  .

⚠ WARNING

When the vehicle is not in use, always lock the doors and boot lid to reduce the risk of severe or fatal injuries.

- Never leave children unattended in the vehicle, especially when the boot lid is open. Children could climb into the luggage compartment and shut the boot lid. In these situations, children would not be able to leave the luggage compartment by themselves. This could lead to severe or fatal injuries.
- Never let children play in or around the vehicle.
- Never travel in the luggage compartment.

⚠ WARNING

Objects that are not secured, or are secured incorrectly, can cause serious injuries in the event of a sudden driving or braking manoeuvre or accident. This applies particularly if objects are struck by the airbag when activated and then flung through the vehicle interior. Please apply the following rules to reduce the risk of accidents:

- Do not stow any hard, heavy or sharp objects loose in any of the vehicle's open stowage areas, on the boot lid or on the dashboard.
- Remove any hard, heavy or sharp objects from items of clothing and bags inside the vehicle and stow them securely.

⚠ WARNING

Transporting heavy objects changes the vehicle's handling and increases the braking distance. Heavy loads that are not properly stowed or secured in the vehicle can lead to a loss of vehicle control and can cause serious injuries.

- Transporting heavy objects changes the vehicle's handling and the centre of gravity.
- Always secure heavy objects as far back into the luggage compartment as possible.

ⓘ NOTICE

Hard objects could chafe against the wires of the heating element in the rear window and cause damage.

ⓘ The ventilation openings between the rear window and the luggage compartment cover must not be covered as this would prevent stale air escaping from the vehicle.

Luggage compartment cover

📖 Please refer to **⚠** and **ⓘ** at the start of the chapter on page 196.



Fig. 166 In the luggage compartment: remove and install the luggage compartment cover.

When the rear lid is opened and closed, the cover is automatically raised or lowered when the retention cords are attached.

The luggage compartment cover can be used to stow light garments. Ensure rear visibility is not impaired

Removing the luggage compartment cover

- Unfasten the retaining cords from the rear lid support → **Fig. 166** (upper arrows).
- Remove the luggage compartment cover from behind out of the side supports → **Fig. 166** (lower arrows).

Install the luggage compartment cover

- Push the luggage compartment cover forward, engaging the side supports → **Fig. 166** (lower arrows).
- Fit the retaining cords on the rear lid → **Fig. 166** (upper arrows).

⚠ WARNING

Loose objects or that are not correctly secured, as well as animals on top of the luggage compartment cover can cause serious injuries in the event of a sudden driving or braking manoeuvre or accident.

- Do not stow any hard, heavy or sharp objects in pockets, purses or loose on the surface of the luggage compartment cover.

- Never carry animals on top of the luggage compartment cover.
- Never drive with the luggage compartment cover raised. Double down or remove the cover prior driving.

NOTICE

To prevent damages to the luggage compartment cover:

- Always make sure the luggage compartment cover is firmly secured to the side supports.
- Only load the luggage compartment upward so that the luggage compartment cover is not pressed against the luggage when the rear lid is closed.

Bag hooks

Please refer to  and  at the start of the chapter on page 196.

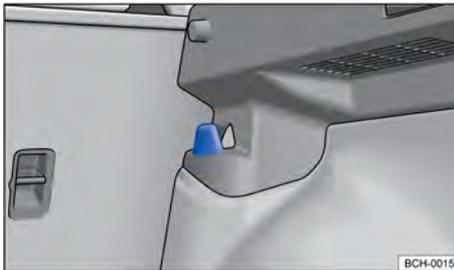


Fig. 167 On the luggage compartment: bag hooks.

Bag hooks may be available in the upper left and right-hand sides of the luggage compartment → Fig. 167.

WARNING

Never use the bag hooks for securing purposes. The bag hook could break off during a sudden braking manoeuvre or accident.

NOTICE

Each bag hook supports a maximum load of 2.5 kg.

Roof carrier

Introduction

The vehicle is provided with two vertical ribs, and cross struts may be acquired at Volkswagen Dealerships.

Only additional roof rack supports cleared by Volkswagen may be used.

WARNING

When transporting heavy or large objects in the roof carrier, vehicle driving conditions are altered due to the shift of the gravity centre and increased wind resistance surface.

- Always secure loads properly using suitable and undamaged securing straps or tension belts.
- Heavy, large, long or flat loads negatively affect the vehicle's aerodynamics, centre of gravity and driving behaviour.
- Avoid abrupt and sudden braking and driving manoeuvres.
- Adapt your speed and driving style to suit visibility, weather, road and traffic conditions.

NOTICE

- Remove the roof carrier before submitting the vehicle into an auto-wash system.
- The vehicle level is altered after assembling a roof carrier and stowing loads. Compare the vehicle level with available passage heights, for example, in road bridges and garage doors.
- The roof aerial, sunroof operating range, and boot lid cannot be affected by the roof carrier system or loads secured in it.
- Ensure that the boot lid does not come into contact with roof carrier loads upon opening.

 Remove roof rack cross beams when not in use, preventing unnecessary fuel consumption due to greater aerodynamic resistance.

Using the roof rack

📖 Please refer to ⚠️ and ⓘ at the start of the chapter on page 197.

The longitudinal supports are but the base for a complete load transport system and are supplied with the vehicle. For luggage transport, **additional cross beams** are necessary for safety reasons. For safety reasons, exclusive additional supports are required when transporting luggage, bicycles, surf boards, skiing equipment, and boats. Additional accessories can be acquired at Volkswagen Dealerships.

Conventional roof carriers must not be installed in vertical ribs. We recommend that only roof rack cross beams homologated by Volkswagen are used.

⚠️ WARNING

Improperly fastening base supports and roof carriers, as well as its incorrect use, may cause the entire system to detach from the roof, resulting in injuries and accidents.

- If additional cross members homologated by Volkswagen are not used or are improperly fixed, the transported load or the roof rack itself may fall off the vehicle roof.
- Always follow the instructions provided in the owner's manual.
- Only use roof carriers when base supports are properly fastened and the roof carrier presents proper use conditions.
- Correctly mount the roof rack cross members.
- Check fastening points before driving and re-tighten them after short drives if necessary. In case of long hauls, check the bolt and fastening spots upon each stop.
- Always assemble special roof carriers for bicycles, skiing equipment, surf boards, etc. correctly.
- Do not modify or repair roof carriers and base supports.

ⓘ NOTICE

Always observe roof carrier cross beam manufacturer's installation instructions.

- Keep roof carrier manufacturer's installation and use instructions along with the vehicle's documents.

ⓘ NOTICE

Damages caused by improper roof carrier fastening are not covered by the warranty.

- The vehicle level is altered after assembling a roof carrier and stowing loads. Compare the vehicle level with available passage heights, for example, in road bridges and garage doors.

ⓘ Read and follow installation instructions provided along with the roof carrier, always keeping such instructions in the vehicle.

ⓘ It is paramount to know applicable laws regarding the sizes of volumes transported over vehicle roofs. ◀

Loading the roof carrier

📖 Please refer to ⚠️ and ⓘ at the start of the chapter on page 197.

The load may be safely fastened when a roof rack system homologated by Volkswagen is used and is properly mounted → ⚠️.

Maximum roof weight permitted

The maximum roof weight permitted is **50 kg**. The roof load encompasses the weight of the roof carrier and the load to be transported over the roof → ⚠️.

Always mind the weight of the roof carrier and load to be transported. Never exceed the maximum roof load permitted.

When using roof carriers with lower load capacities, the maximum roof load permitted may not be used. In this case, the roof carrier may only be loaded until the weight limit indicated in its installation instructions.

Distributing load

Evenly distribute the load between the members and along their full length → ⚠️.

Controlling fastening points

After the roof rack members were fastened, check them after a short drive and subsequently at regular intervals.

⚠️ WARNING

Accidents and severe injuries can occur if the maximum permitted roof weight is exceeded. ▶

- Never exceed the maximum roof weight permitted, maximum axle weight permitted and the total vehicle weight permitted.
- Never exceed the roof carrier load capacity, even if under the maximum roof load capacity. In this case load the roof rack beams only to the weight limit indicated by the manufacturer's instructions.
- Fasten heavy objects as far ahead as possible and uniformly distribute the load.

WARNING

Loose or incorrectly fastened loads may fall from the roof carrier and cause accidents and injuries.

- Always secure loads properly using suitable and undamaged securing straps or tension belts.
- Properly fasten loads.

 Sometimes the roof rack beams remain mounted even if they're not longer necessary. Due to the greater aerodynamic resistance, the vehicle will unnecessarily consume more fuel. Therefore remove the roof rack beams when no longer in use.

 The load transported on the roof must be properly fastened. Transporting loads on the roof changes the vehicle's behaviour.

Usage guidelines

 Please refer to  and  at the start of the chapter on page 197.

When should the roof rack cross members be removed:

- When they're no longer necessary, thus sparing fuel, the wind noise is reduced and theft of the roof rack is avoided.
- When the vehicle passes through an auto-wash system.
- When the vehicle level exceeds the maximum passage height in a garage, for example.

NOTICE

- The vehicle's height changes after installing a roof carrier and loading the carrier with cargo. Compare the vehicle level with available passage heights, for example, in road bridges and garage doors.
- The roof aerial and boot lid cannot be affected by the roof carrier system or loads secured to the roof.

 Vehicles equipped with roof carriers consume more fuel due to the greater wind resistance.

Towing a trailer

Introduction

Observe any country-specific regulations when towing a trailer and using a towing bracket.

Your car is intended mainly for transporting passengers and luggage. However, it can also be used to tow a trailer or caravan, provided that it is fitted with the appropriate technical equipment. This additional maximum trailer weight will affect the durability, fuel consumption and performance of the vehicle and, in certain circumstances, can shorten the service intervals.

Driving with a trailer not only places an extra load on the vehicle, but also requires increased concentration on the part of the driver.

Vehicles with Start-Stop system

Before towing a trailer, the Start-Stop system must be manually disabled and remain disabled at all times while towing a trailer → page 102.

DANGER

It is dangerous to transport people in a trailer and it may also be illegal.

WARNING

Improper use of the towing bracket can cause injury and accidents.

- Only use the towing bracket if it is fitted properly and is not damaged.

- Do not perform any modifications or repairs to the towing bracket.

WARNING

Towing a trailer and transporting heavy or bulky items can change the way the vehicle's handling and cause accidents.

- Therefore, observing the instructions below is essential to ensure the safety of the driver, passengers, and other road users.
 - Always secure loads properly using suitable and undamaged securing straps.
 - Adapt your speed and driving style to suit visibility, weather, road and traffic conditions.
 - Trailers with a high centre of gravity are more likely to tip over than trailers with a low centre of gravity.
 - Avoid abrupt and sudden braking and driving manoeuvres.
 - Take special care when overtaking.
 - Reduce your speed immediately if the trailer shows even the slightest sign of snaking.
 - When towing a trailer do not drive faster than 80 km/h (50 mph). This also applies to countries where higher speeds are permitted. Always obey speed limits. In some areas speed limits for vehicles towing trailers are lower than for vehicles without trailers.
 - Never try to “stop” a trailer from snaking by increasing your speed.

WARNING

With a retrofitted towing bracket, the Start-Stop system must always be manually turned off when towing a trailer. Otherwise, this may cause damages to the brake system and result in severe accidents and injuries.



In new vehicles, do not tow a trailer during the first 1,000 km → page 199.

Technical requirements

 Please refer to  and  at the start of the chapter on page 199.

Only use a towing bracket which is approved for the gross weight of the trailer you wish to tow. The towing bracket must be suitable for your vehicle and trailer and must be securely bolted to the vehicle's chassis. Always check and follow the data provided by the towing bracket manufacturer.

Towing brackets fitted to the rear bumper

Never fit a towing bracket to the rear bumper or to its fastening. A towing bracket must not prevent the rear bumper from functioning correctly. Do not carry out any alterations to the exhaust or brake systems. Check regularly to see if the towing bracket is fitted securely.

Engine cooling system

There is an increased load on the engine and the cooling system when towing a trailer. The cooling system must contain sufficient coolant and be able to cope with the extra load added by the trailer.

Trailer brake

If the trailer is equipped with its own brake system, observe any legal requirements. The trailer's brake system must never be connected to the vehicle brake system.

Emergency breakaway cable

Always use the emergency breakaway cable between your vehicle and the trailer → page 201.

Rear trailer lights

The rear lights on the trailer must meet legal requirements → page 201.

Never connect the trailer lights directly to the electrical system of your vehicle. If you are uncertain whether the trailer has been connected correctly, please contact a qualified workshop. Volkswagen recommends using a Volkswagen Dealership for this purpose. 

Exterior mirrors

you are unable to see the traffic behind the trailer in the vehicle's standard exterior mirrors, additional exterior mirrors should be fitted in accordance with any country-specific regulations. Before setting off, adjust the mirrors so that you have a sufficient view of the rear.

WARNING

If the towing bracket is unsuitable or incorrectly fitted, the trailer can become detached from the vehicle and cause severe injuries.

NOTICE

- The vehicle electronics may be damaged if the trailer lights are not connected properly.
- The vehicle electronics may be damaged if the trailer uses too much electricity.
- Never connect the trailer's electrical system directly to the electrical connections of the tail lights or to other sources of electricity. Use only suitable connectors to supply power to the trailer.

 Volkswagen recommends additional services between the normal inspection intervals if the vehicle is used frequently for towing a trailer.

Engaging and connecting the trailer

 Please refer to  and  at the start of the chapter on page 199.

Emergency breakaway cable

Always fasten the emergency breakaway cable properly in the towing vehicle. In this case, leave some slack for the breakaway cable to allow curves. However, the breakaway cable must not drag on the ground while driving.

Rear trailer lights

Ensure that the rear trailer lights are functioning properly and are in compliance with legal requirements.

WARNING

Unsuitable or incorrectly connected electrical conductors may power the trailer, cause operating faults in the vehicle's electronics and cause severe injuries.

- All activities regarding the electrical system can only be conducted by a Volkswagen Dealership or qualified workshop.
- Never connect the trailer's electrical system directly to the electrical connections of the tail lights or to other sources of electricity.

NOTICE

A trailer parked over the support wheel or over the trailer supports must not be connected to the vehicle. For example, the vehicle is lifted or lowered due to load changes or tyre damages. In this case, major forces act over the trailer bracket and over the trailer, which may damage the vehicle and the trailer.

 If the engine is not running and electrical equipment is switched on in the trailer via the trailer socket, the vehicle battery will discharge.

Loading the trailer

 Please refer to  and  at the start of the chapter on page 199.

Maximum trailer weight and drawbar load

The maximum trailer weight is the weight that the vehicle can pull → . The drawbar load is the weight that the towing bracket exerts on the ball coupling vertically from above → page 199.

The figures for maximum trailer weight and drawbar weights that are given on the data plate of the towing bracket are for certification purposes only. The correct values for your specific model, which may be *lower* than these figures, are provided in the vehicle registration documents. All data in the official vehicle documents take precedence over this data.

In the interest of road safety, Volkswagen recommends that you always transport the maximum **drawbar load**. The response of the trailer on the road will be poor if the drawbar load is too small.

The drawbar load increases the weight on the rear axle and reduces the maximum load level as a result.

Gross combination weight

The gross combination weight is comprised of actual loaded vehicle and loaded trailer weights. ►

Loading the trailer

The weight of the load should be distributed evenly. The maximum permitted drawbar load should be utilised. Do not place the load only at the front or the rear of the trailer:

- Distribute loads in the trailer so that heavy objects are either over or as near to the axle as possible.
- Secure all loads on the trailer properly.

Tyre pressure

Follow the trailer manufacturer's recommendations concerning the tyre pressure for the trailer tyres.

When towing a trailer, inflate the wheels on the towing vehicle with the maximum permitted tyre pressure → page 245.

WARNING

Accidents and serious injuries can occur if you exceed the vehicle's maximum permitted gross axle weight rating, drawbar load, gross vehicle weight rating or gross combination weight rating.

- Never exceed the specified values.
- Never let the actual weights at the front and rear axles exceed the gross axle weight ratings. Never exceed the permissible gross vehicle weight for the vehicle with weight at the front and rear of the vehicle.

WARNING

Moving loads can severely impair the vehicle's stability and driving safety, which can cause accidents and severe injuries.

- Always load trailers correctly.
- Always secure loads properly using suitable and undamaged securing straps.

Towing a trailer

 Please refer to  and  at the start of the chapter on page 199.

Headlight adjustment

Towing a trailer can raise the front end of the vehicle enough for the dipped beam to blind other road users. The headlights must be adjusted in a Volkswagen Dealership or qualified workshop.

Things to note when driving with a trailer

- If the trailer has an **overrun brake**, apply the brakes *gently at first*, and then firmly. This will prevent the jerking that can be caused by the trailer wheels locking.
- The gross combination weight causes the braking distance to increase.
- Prior taking on strong downhill slopes, select a lower gear (manual gearbox or Tiptronic mode of the automatic gearbox) to make use of the engine as a brake. The brake system could otherwise overheat and fail.
- The vehicle's centre of gravity and the vehicle's handling will change because of the maximum trailer weight and the increased combined towing weight of the vehicle and trailer.
- The weight distribution of a loaded trailer with an unladen towing vehicle is very unfavourable. When driving in this situation, drive particularly carefully and slowly.

Pulling off on hills when towing a trailer

Depending on the steepness of the slope and the total weight of the trailer and vehicle, a parked vehicle towing a trailer could roll back a short distance when moving off on a hill.

When towing a trailer, pull off on hills as follows:

- Press and hold the brake pedal.
- Pull the handbrake.
- *Vehicles with manual gearbox*: press the clutch pedal fully down.
- Engage the 1st gear → page 104 or the **D/S** selector lever position → page 106.
- Release the brake pedal.
- Pull away slowly. With manual gearbox, gently release the clutch pedal.
- Only let go of the handbrake lever when the engine has sufficient power to move off.

WARNING

Incorrect trailer towing can cause loss of vehicle control and severe personal injuries.

- Towing a trailer and transporting heavy or bulky items can change the way the vehicle's handling and increase the braking distance.
- Always drive carefully and defensively. Brake earlier than in normal driving.

- Adapt your speed and driving style to suit visibility, weather, road and traffic conditions. Reduce your speed, especially when going downhill.
- Accelerate carefully and gently. Avoid abrupt and sudden braking and driving manoeuvres.
- Take special care when overtaking. Reduce your speed immediately if the trailer shows even the slightest sign of snaking.
- Never try to “stop” a trailer from snaking by increasing your speed.
- In some areas speed limits for vehicles towing trailers are lower than for vehicles without trailers.

Retrofitting a towing bracket

📖 Please refer to ⚠ and ⚠ at the start of the chapter on page 199.

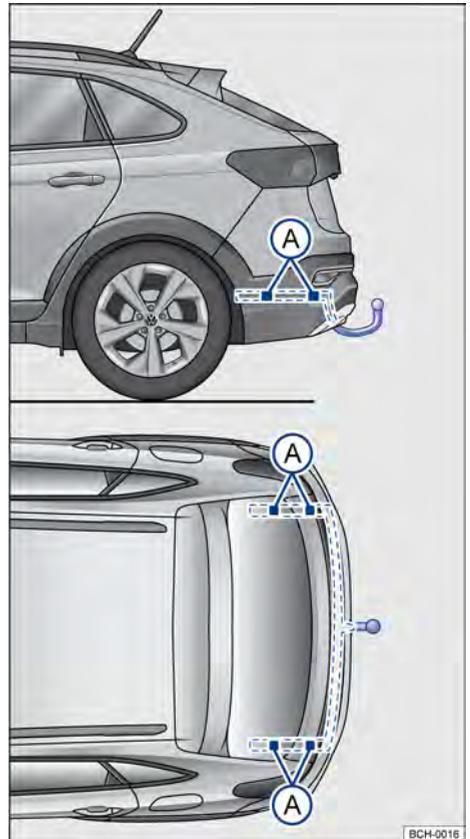


Fig. 168 Attachment points for retrofitting a towing bracket.

Figure → Fig. 168 illustrates as an example the fastening point to install a towing bracket on the Nivus model.

Towing bracket retrofitting must be executed in accordance with the instructions provided by the bracket's manufacturer, always considering the attachment points indicated in → Fig. 168 (A).

The towing bracket securing points can be seen from the lower part of the vehicle. The towing bracket must be secured to such points.

Retrofitting a towing bracket

- Observe applicable laws in the country in which the vehicle will run.
- It might be necessary to disassemble and reassemble the rear bumper. Additionally, it is also necessary to tighten the towing bracket screws with a torque meter and connect a socket to the vehicle's electrical system. For such, special tools and expertise are required.
- The figure indicates securing points that must be observed when installing towing brackets.

WARNING

Unsuitable or incorrectly connected electrical conductors may cause operating faults in all of the vehicle's electronic components, which may cause severe accidents and injuries.

- Never connect the trailer's electrical system directly to the electrical connections of the tail lights or to other improper sources of electricity. Use only suitable connectors for trailer connection.
- Trailer bracket retrofitting activities must be conducted by a Volkswagen Dealership or qualified workshop.

WARNING

If the towing bracket is unsuitable or incorrectly fitted, the trailer can become detached from the vehicle. This could lead to severe accidents and fatal injuries.

NOTICE

Towing a trailer represents a greater stress for the vehicle. Before deciding to **retrofit**, contact a Volkswagen Dealership to know if it is necessary to perform any modifications in the cooling system or if thermal shielding plates must be installed.

Fuel

Fuel handling safety guidelines

WARNING

Filling the tank incorrectly and improper handling of fuel can cause explosions, fire and serious burns and injuries.

- Always ensure that the tank cap is closed properly to prevent the evaporation and spillage of fuel.
- Fuel is highly explosive and inflammable and can cause serious burns and other injuries.
- Fuel can spill out if the engine is not switched off or the filler nozzle is not fully inserted into the fuel filler neck when filling the tank. This may cause fires, explosions and serious burns and injuries.
- When filling the tank with fuel, the engine and the ignition must be switched off for safety reasons.
- When filling the tank, always switch off your mobile telephone and two-way radio or any other radio equipment. Electromagnetic radiation can generate sparks which can in turn start a fire.
- When filling the tank, never get into the vehicle. If in exceptional cases you have to enter the vehicle, close the door and touch a metal object before touching the filler nozzle again. This will remove any spark-generating electrostatic charges from you. Sparks can cause a fire when filling the tank.
- Never fill the tank or fill up a spare canister near open flames, sparks or glowing items (e.g. cigarettes).
- Electrostatic discharge and electromagnetic radiation must be avoided when filling the tank.
- Follow all applicable safety information provided by the filling station when filling the tank.
- Never spill fuel in the vehicle or in the luggage compartment.

WARNING

For safety reasons, Volkswagen does not recommend carrying a spare fuel canister in the vehicle. Fuel can spill out of the full or empty canister and catch fire, especially in the event of an accident. This could cause explosions, fire and injuries.

- If, in exceptional circumstances, you have to transport a spare fuel canister, please note the following:
 - When refilling, never place the canister in or on top of the vehicle (e.g. in the luggage compartment). There may be an electrostatic charge during refilling causing the fuel fumes to ignite.
 - Always place the spare fuel canister on the ground.
 - When filling a spare fuel canister, place the filler nozzle as far as possible into the filler opening.
 - If the spare fuel canister is made of metal, the filler nozzle must have constant contact with the canister in order to avoid static charging.
 - Please follow all legislation concerning the use, stowage and transportation of spare fuel canisters.

NOTICE

- Remove spilt fuel from the vehicle paint as quickly as possible in order to avoid damage to the wheel housing, tyres and vehicle paint.
- Do not run the tank empty. Irregular filling periods can cause backfiring and allow unburnt fuel to enter the exhaust system. This could damage the catalytic converter.

 After the fuel filler nozzle is automatically switched off for the first time, the tank will have reached its capacity. Do not force fuel filling, since fuel may overflow.

- When filling, fuel may be spilt on the ground, polluting the environment. Always fill the at authorized filling stations with proper fluid collection and disposal systems.

Fuelling and fuel types

Introduction

The fuel cap is located at the rear right-hand side of the vehicle.

The factory- fitted sticker on the inside of the tank flap indicates the required fuel type for the vehicle.

WARNING

Incorrect handling of fuel may cause explosions, fire and severe burns and injuries.

- Fuel is highly explosive and inflammable.
- Never handle fuel near open flames, sparks or glowing items (e.g. lighters).
- Observe any valid safety information and legislation concerning the handling of fuels.

NOTICE

- If the TOTALFLEX vehicle is immobilized by “**lack of fuel**”, the vehicle must be refilled with the last type of fuel used - petrol or ethanol.
- If it is necessary to fill the tank with a different type of fuel, the following may occur:
 - Considerable decrease in engine performance.
- The vehicle must run for approximately 5 kilometres to recognize the new fuel type, in order to prevent any of the scenarios above.

NOTICE

For vehicles with TSI engines: if there is an option to refuel the vehicle exclusively with Ethanol-type fuel, it is recommended that every 10,000 km the vehicle be refueled with at least one full tank of gasoline. This recommendation is mandatory to observe, and aims to prevent the accumulation of contaminating matter arising from the characteristics of Ethanol. This possible accumulation of contaminating matter in the fuel supply system can result in loss of engine performance or even difficulties in starting the vehicle.

 When the airbags are triggered during an accident, the fuel supply is interrupted → page 41, *In case of airbag triggering - Crash detection function.*

Petrol engine

📖 Please refer to ⚠️ and ⚠️ at the start of the chapter on page 205.

Vehicles with a petrol engine must be driven using **unleaded petrol free from any metallic additives (such as manganese)**, in accordance with applicable country laws.

Petrol additives

The quality of petrol influences the running properties, performance and service life of the engine. Therefore, fuel up with quality fuel and, when necessary, use the adequate additives.

The use of unsuitable petrol additives can cause considerable damage to the engine and catalytic converter. Metallic petrol additives should be avoided at all times.

⚠️ NOTICE

- If, in an emergency, you have to use a different from specified petrol, drive at medium engine speeds and avoid high engine loading. Avoid high engine speeds and heavy engine loads. Failure to do so can result in engine damage! Fill the tank with the recommended petrol as soon as possible.

🌿 Just one tank full of leaded fuel, or fuel containing other metallic additives (such as manganese), can seriously impair the efficiency and cause damages to the catalytic converter. ⚠️

TOTALFLEX engine

📖 Please refer to ⚠️ and ⚠️ at the start of the chapter on page 205.

Petrol

Vehicles must be driven using **unleaded petrol free from any metallic additives (such as manganese)**, with RON 95/E24 (blue) ethanol percentage.

Petrol additives

The quality of petrol influences the running properties, performance and service life of the engine. Therefore, fuel up with quality fuel and, when necessary, use the adequate additives.

The use of unsuitable petrol additives can cause considerable damage to the engine and catalytic converter. Metallic petrol additives should be avoided at all times.

Ethanol

The vehicle must be fuelled exclusively with **hydrated ethanol**, in accordance with applicable country laws.

⚠️ NOTICE

- The use of unsuitable petrol additives can cause considerable damage to the engine and catalytic converter.
- If, in an emergency, you have to use fuel different than specified, drive at medium engine speeds and avoid high engine loading. Avoid high engine speeds and heavy engine loads. Failure to do so can result in engine damage! Fill the tank with the recommended petrol as soon as possible.
- Just one tank full of leaded fuel, or fuel containing other metallic additives (such as manganese), can seriously impair the efficiency and cause considerable damages to the catalytic converter. ⚠️

Fuelling

📖 Please refer to ⚠️ and ⚠️ at the start of the chapter on page 205.

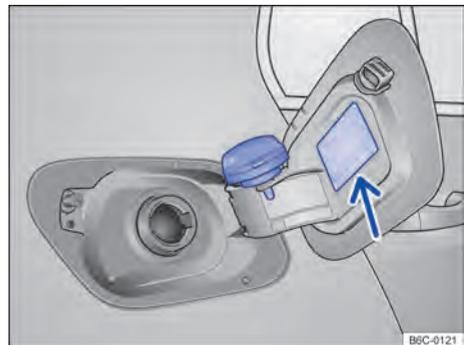


Fig. 169 Open tank flap with tank cap attached to the holder.

Switch off the engine, ignition and the mobile telephones **before** filling the tank and leave them switched off during the process. ▶

Vehicles with TOTALFLEX engine were designed to use **both petrol and ethanol in any amount.**

Check the fuel tank capacity in → page 283.

Opening the tank flap

- Unlock the vehicle with the vehicle key or press the central locking button  in the driver door to unlock the vehicle from the inside → page 59.
- On the aft part of the tank flap, press and open the flap outward.
- Remove the tank cap rotating it counter clockwise and stow it into the holder on the tank flap → Fig. 169.

Filling the tank

The correct fuel grade for your vehicle is shown on a sticker on the inside of the tank flap → page 205.

- The fuel tank is *full* when the filler nozzle clicks off for the first time → .
- Do not continue filling the tank after it switches off! The expansion space in the fuel tank will otherwise fill up and the fuel could spill out. This could also happen when the fuel warms up and expands.

Closing the tank cap

- Turn the tank cap clockwise into the fuel filler neck until you hear it engage.
- Close the tank flap. The tank flap must be flush with the vehicle bodywork.

WARNING

Do not continue filling the tank once the filler nozzle stops automatically. The fuel tank cannot be overfilled. This can cause fuel to splash out and overflow. This could cause explosions, fires and severe injuries.

WARNING

The fuel tank cap should only be open while the vehicle is being refuelled. In all other situations, the fuel tank cap must be correctly closed so that fuel vapours are not released into the environment. The fuel tank cap must be correctly closed by turning it clockwise until you hear a "click".

NOTICE

For TOTALFLEX vehicles with TSI engines: if there is an option to refuel the vehicle exclusively with Ethanol-type fuel, it is recommended that every 10,000 km the vehicle be refueled with at least one full tank of gasoline. This recommendation is mandatory to observe, and aims to prevent the accumulation of contaminating matter arising from the characteristics of Ethanol. This possible accumulation of contaminating matter in the fuel supply system can result in loss of engine performance or even difficulties in starting the vehicle.

 After the fuel filler nozzle is automatically switched off for the first time, the tank will have reached its capacity. Do not force fuel filling, since fuel may overflow.

- When filling, fuel may be spilt on the ground, polluting the environment. Always fill the at authorized filling stations with proper fluid collection and disposal systems. 

Engine control unit and exhaust gas emission control system

Introduction

The relevant components for the exhaust emission system reduce the emission of harmful elements:

- Engine Electronic Power Control (EPC) → page 208
- Catalytic converter → page 208
- Lambda probe → page 208
- Activated charcoal filter - supply system → page 209

Information regarding warning and indicator lamps is available in the Troubleshooting section at the end of the chapter → page 209.

WARNING

Combustion engine combustion gases contain carbon monoxide which can provoke fainting and lead to death. 

- Never start or run the engine in unventilated or closed spaces.
- Never leave the engine running if you leave the vehicle unattended.

WARNING

The exhaust system components become very hot. This may cause fires.

- Park the vehicle so that no part of the exhaust system can come into contact with any inflammable material underneath the vehicle, e.g. dry grass.
- Never apply underseal or anti-corrosion coatings to the exhaust pipes, catalytic converter, diesel particulate filter or the heat shields on the exhaust system.

Electronic engine power control (EPC)

 Please refer to  at the start of the chapter on page 207.

The electronic engine power control (EPC) is a system designed to determine the throttle valve position based on the torque required by the driver through the electronic pedal (e-gas system); the indicator lamp **EPC** lights up in the event of system malfunctions.

Under normal operating conditions, when the driver activates the accelerator pedal, the system transforms such request into a need for speed and power.

By controlling engine components (sensors and actuators), the best performance possible is calculated, based on the driver's request.

Catalytic converter

 Please refer to  at the start of the chapter on page 207.

The catalytic converter is used for exhaust gas post-treatment and helps mitigate the emission of pollutants into the atmosphere. Observe the following points to ensure that the exhaust system and catalytic converter in the engine function properly for extended periods of time:

- Fill the tank only with unleaded petrol free from other metallic additives (such as manganese)
- Never allow the fuel tank to run completely dry.
- Never overfill engine oil → page 230.
- Never push and/or pull the vehicle to start the engine ("push starting"), but rather use the jump starting system → page 222.

If you notice misfiring, uneven running or loss of power when the vehicle is moving, reduce speed immediately. The vehicle should be inspected at the nearest Volkswagen Dealership or qualified workshop. If this happens, unburnt fuel can enter the exhaust system and escape into the atmosphere. The catalytic converter can also be damaged by overheating!

NOTICE

Just one tank full of leaded fuel, or fuel containing other metallic additives (such as manganese), can seriously impair the efficiency and cause damages to the catalytic converter.

 Even when the exhaust purification system is working perfectly, there may be a smell of sulphur from the exhaust in some conditions. This depends on the sulphur content of the fuel being used. Often, it is simply a case of using a different fuel brand.

Lambda probe

 Please refer to  at the start of the chapter on page 207.

The purpose of the lambda probe is to monitor exhaust gases through a sensor hit by led or other metallic additives (e.g. manganese) contained in the fuel, and gradually reduced. The lambda probe completely loses its efficiency after 10,000 km. The resulting lack of monitoring could cause engine malfunctions, such as:

- changes in driving conditions;
- hot engine starting problems;
- increased fuel consumption.

Fuel tank ventilation system

 Please refer to  at the start of the chapter on page 207.

The evaporative system in the vehicle has a dedicated device to prevent fuel vapours from being released into the environment. With this device, the engine's electronic module controls the operation of components for a few minutes and assesses the internal pressure of the evaporative system.

The fuel tank ventilation system has an activated carbon filter that retains hydrocarbons generated during refuelling and vehicle use (evaporative emissions control). During engine operation, these hydrocarbons are sucked in and burned in the normal combustion process.

WARNING

Make sure the fuel tank cap is closed correctly after refuelling. The fuel tank cap must be correctly closed by turning it clockwise until you hear a "click". If this procedure is not carried out correctly, when the car is moving, the on-board diagnostic system may detect a fault when performing the self-check.

WARNING

If the problem is detected three times in a row, the system will turn on the engine light .



The activated charcoal filter prevents fuel tank gas hydrocarbons from being released into the atmosphere.

Troubleshooting

 Please refer to  at the start of the chapter on page 207.

If the engine operates irregularly or in case of engine jolts while driving, this could be related to insufficient fuel or low-quality fuel (e.g. water mixed in the fuel). In these cases, immediately slow down and seek assistance at a Volkswagen Dealership or qualified workshop nearby, driving at low revs and speed. If these symptoms occur immediately after filling the tank, switch the en-

gine off immediately – as well as to avoid secondary damages – and seek assistance from a Volkswagen Dealership or qualified workshop.

Indicator lamps

The combustion gases emission control system (OBD) is not available in countries which legislation does not cover this system. In these cases the indicator lamp  will only light up when the ignition is turned on and when starting the engine.

EPC Engine management system fault (Electronic Power Control). **On:** the engine must immediately be checked at a Volkswagen Dealership.



Fuel vapour leak detection system. **{0}>{0}<0}<0} lit up** Check that the fuel tank cap is closed correctly. The fuel tank cap must be correctly closed by turning it clockwise until you hear a "click". If the lid is not closing properly, close it correctly and drive the vehicle normally until the light goes out. For this to occur, the engine may need to be started more than 3 times from a cold start. If the light remains on after this procedure, drive to the nearest Volkswagen Dealership.

OU



Faulty emissions in the exhaust system (OBD). **On:** slow down. Carefully drive to the nearest Volkswagen Dealership. The engine must be checked.



Flashing: faulty catalytic converter. Reduce your speed. Carefully drive to the nearest Volkswagen Dealership or qualified workshop. The engine must be checked.

When switching the ignition on, certain warning and indicator lamps flash to check functions. Such lamps go out after a few seconds.

WARNING

Failure to observe the warning lamps and text messages could lead to your vehicle breaking down in traffic, and to accidents and serious injuries.

- Never ignore any warning lamps or text messages that appear.
- Stop the vehicle as soon as possible and when safe to do so.

NOTICE

Failure to observe the illuminated indicator lamps and its descriptions and meanings could lead to vehicle damages.

If the indicator lamps  or **EPC** are lit up, fuel consumption may be higher and engine performance reduced.

Fuel quality

Considering the impracticality of supervising all filling stations, Volkswagen recommends filling the tank in stations included in the Distributor Network, which have clear programs, in order to ensure product quality.

Volkswagen Dealerships are prepared to handle engine sediments.

Fuel injection system

The vehicle is equipped with a fuel injection system that, under normal circumstances, waives the need for any periodical cleaning process, either with fuel additives or disassembling the injection valves to clean ultrasound systems.

Cleaning is required whenever damages or improper engine function occur due to use of low-quality fuel. In this case, Volkswagen recommends visiting a Volkswagen, Dealership, which has suitable additives and equipment.

NOTICE

Damages caused on the engine due to the use of improper or insufficient fuel are not covered by the warranty.

If and when Vehicle toolkit

Introduction

Observe any country-specific legislation when securing your vehicle in the event of a breakdown.

WARNING

In the event of a sudden driving or braking manoeuvre or accident, a loose vehicle toolkit and spare wheel could be flung through the vehicle and cause severe injuries.

- Always ensure that the vehicle toolkit or spare wheel are secured in the luggage compartment.

WARNING

Unsuitable or damaged tools in the vehicle toolkit can lead to accidents and injuries.

- Never work with unsuitable or damaged tools from the vehicle toolkit.

Vehicle toolkit stowage and access

Please refer to  at the start of the chapter on page 210.



Fig. 170 On the luggage compartment, under the floor lining: spare wheel and vehicle toolkit.

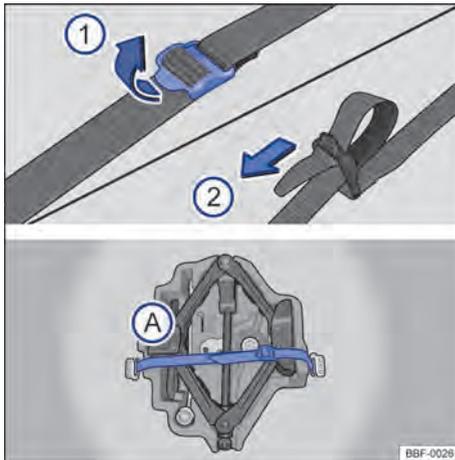


Fig. 171 On the luggage compartment: vehicle toolkit securing strap and vehicle toolkit.

The vehicle toolkit and spare wheel are located in the luggage compartment, under the floor covering → Fig. 170.

To access the vehicle toolkit, the spare wheel must be removed.

Accommodation of the vehicle toolkit

- Lift the floor lining of the luggage compartment → Fig. 170.
- Remove the lining completely to remove the spare wheel and access the vehicle toolkit.

Release the vehicle toolkit securing strap

To release the securing strap → Fig. 171 (A), pull the buckle in the direction of the arrow ①.

Securing the vehicle toolkit

- Fit the vehicle toolkit in its housing.
- Pass the strap through the buckle in the direction of the arrow ② and firmly pull the belt to secure the vehicle toolkit.

 Always ensure that the spare wheel and vehicle toolkit are properly secured in the luggage compartment. 

Contents of the vehicle tool kit

 Please refer to  at the start of the chapter on page 210.

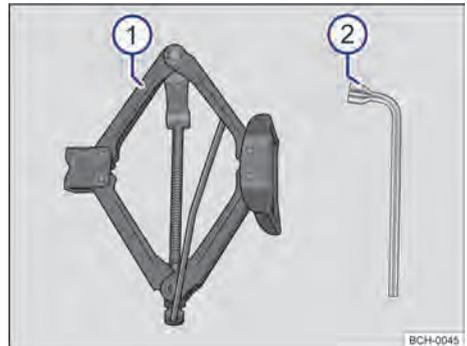


Fig. 172 Contents of the vehicle toolkit.

The content of the vehicle toolkit depends on the vehicle equipment level. The following describes the maximum scope.

Contents of the vehicle toolkit. → Fig. 172

- ① Jack: fold the pawl in before placing the jack back into the vehicle tool kit. Next, place the handle next to the top part of the jack.
- ② Lug wrench.

 Turn the jack back to its original position after use so it may be securely stored. 

Window wiper blades

Service position



Fig. 173 Window wipers in service position.

In the service position, the windscreen wiper arms can be lifted from the windscreen. Proceed as follows to place the windscreen wipers in service position → Fig. 173:

Activate the service position

- The bonnet must be closed → page 227.
- Switch the ignition on and off.
- Press the window wiper lever briefly downwards.

Suspending the windscreen wiper arms off the windscreen.

- Place the windscreen wiper arms into service position before suspending them → ①.
- To suspend the windscreen wiper arms, hold them **only** by the wiper blade attachment area.

Place the windscreen wiper arms back on the windscreen again prior driving! Press the windscreen wipers lever briefly down with the ignition turned on, to return the windscreen wiper arms back into the starting position.

ⓘ NOTICE

- To avoid damages to the bonnet and window wiper arms, lift the windscreen wiper arms only when in service position.
- Always ensure that the wiper arms are lowered onto the windscreen prior driving. ◀

Cleaning and replacing window wiper blades

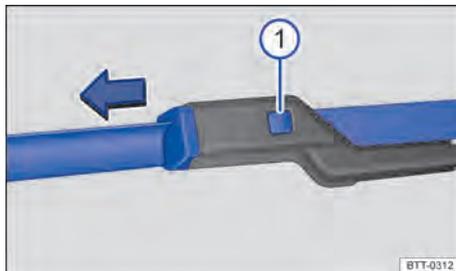


Fig. 174 Replacing windscreen wiper blades.

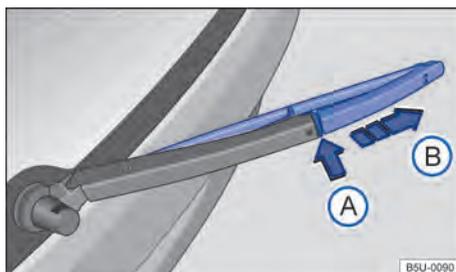


Fig. 175 Replacing the rear window wiper blades.

The factory-fitted window wiper blades are coated with graphite. The graphite coating ensures that the windscreen wiper blade slides quietly over the windscreen. A damaged graphite coating will among others, raise the noise level during the window wiping.

Check the condition of the window wiper blades on a regular basis. Replace the **window wiper blades** whenever they are dirty or are not performing properly → ①.

Damaged window wiper blades must be replaced immediately. Window wiper blades can be bought at Volkswagen Dealerships or qualified workshops.

Cleaning the windscreen wiper blades

Observe on the windscreen wipers: place the window wiper arms into service position before lifting them off the windscreen → ①. ▶

- To suspend the windscreen wiper arms, hold them **only** by the wiper blade attachment area.
- Carefully clean the windscreen wiper blades with a damp sponge → ①.
- Fold the windscreen wiper arms carefully back onto the windscreen.

Replacing windscreen wiper blades

- Place the windscreen wiper arms into service position before suspending them → page 212.
- To suspend the windscreen wiper arms, hold them **only** by the wiper blade attachment area.
- Press and hold the release tab → Fig. 174 ① and pull off the windscreen wiper blade in the direction of the arrow.
- Insert the new wiper blade of the **same length and design** into the wiper arms until it is properly fitted.
- Fold the windscreen wiper arms carefully back onto the windscreen.

Replacing the rear window wiper blades

- Lift and fold the rear window wiper arm.
- Press and hold the release button → Fig. 175 ① pressed.
- Remove the rear window wiper blade in the direction of the arrow ②.
- Insert a new rear window wiper blade of the **same length and design** into the rear window wiper arms until it is properly fitted.
- Fold the rear window wiper arm carefully back onto the rear window.

WARNING

Worn or dirty window wiper blades reduce visibility and increase the risk of accidents and severe injuries.

- Replace window wiper blades whenever they are damaged or worn, and no longer appropriately perform their function.

NOTICE

- Damaged or dirty window wiper blades may scratch the window.
- Detergents containing solvents, hard sponges and other sharp objects can damage the graphite coating during cleaning.
- Do not use fuel, nail varnish remover, paint thinner or similar products to clean the windows.

Exterior lighting

Introduction

Before repairing the product, check which technology is used, incandescent lamp or LED. As rule of thumb, light bulbs can be replaced by yourself. When, according to the vehicle version, the exterior lighting is of LED technology, the replacement of the LED light unit or of the individual LEDs by yourself is not possible. The burning out of individual LEDs may be an indication of possible burn outs of other LEDs. In such case, the lights must be checked, and if necessary, replaced by a specialized workshop.

Changing the vehicle bulbs requires considerable technical skill. If you do not feel confident with the procedure, Volkswagen recommends that you have the bulbs changed by a Volkswagen Dealership or that you seek other expert assistance. Contact a qualified workshop if other vehicle parts around the lights need to be removed.

A box containing spare light bulbs for lights that are required to ensure that the vehicle is road-worthy should be stored in the vehicle at all times. Spare bulbs are available from Volkswagen Dealerships.

Driving with burned out exterior lighting devices may be illegal.

Additional bulb specifications

Some bulbs in headlights or in tail light clusters might have factory specifications that are different than standard bulbs. The designation is inscribed on the bulb, either on the glass part or on the base.

LED technology in the vehicle

The components that use LED (Light Emitting Diode) have long service life and do not have to be changed frequently.

Volkswagen recommends that the replacement of components that use LED be done at a Volkswagen dealership. ▶

Vehicle components that use LEDs are listed below:

- Headlights (*may not be available depending on the vehicle version*).
- Side turn indicator lamp: located in the exterior mirrors (*depending on the version of the vehicle this may not be available*).
- Brake light bulb: located externally on the boot lid, above the rear window.
- Daytime Driving Light: Located in the headlight (*depending on the vehicle version it may not be available*).
- Tail lights (*may not be available depending on the vehicle version*).
- License plate light: located on the rear cover, above the license plate.

WARNING

Despite being illegal, driving with burnt bulbs may cause accidents. Burnt bulbs must be replaced as soon as possible.

- Insufficient lighting of roads, such as streets, avenues and squares, results in low visibility and increases the risk of accidents, since other road users might be unable to see vehicles running with burnt bulbs.

WARNING

Changing the bulb incorrectly can cause accidents and serious injuries.

- Before initiating any work in the engine compartment, always read and observe the warnings → page 225, *Safety guidelines for work in the engine compartment*. The engine compartment of any motor vehicle is a dangerous area and may cause severe injuries.
- Only change the defective bulb once it has had time to cool down completely.
- Never change a bulb unless you are familiar with the procedure. If you are uncertain of what to do, the work should be carried out by a Volkswagen Dealership or qualified workshop.
- Do not touch the glass part of the bulb with unprotected fingers. When the light is switched on, heat will cause fingerprints to evaporate on the bulb which will cause the reflector to "dim".

- There are sharp-edged parts in the headlight housing in the engine compartment and on the tail light cluster housing. Protect your hands when changing a bulb.

NOTICE

Damage to the electrical system can be caused if the rubber covers of the headlight housing are not properly mounted – especially due to water entering the system.

NOTICE

Volkswagen recommends special attention to some plastic parts with clamps, which might break when removing or fitting bulbs.

 Depending on the vehicle version, there may be two lighting reflectors in the rear bumper that are not equipped with bulbs. However, if these elements break and need to be replaced, visit a Volkswagen Dealership or qualified workshop.

 On cold and humid days the headlight lenses may become temporarily fogged because of the difference of temperature between the outside and the inside.

- With the headlight turned on, the outgoing light surface defogs in a short time, eventually leaving some residues at the borders.
- The tail lights and the turn signals may also be affected.
- The fogging phenomenon does not interfere with the life cycle of the lighting system of the vehicle.

Information on changing bulbs

 Please refer to  and  at the start of the chapter on page 214.

Checklist

Always carry out the following actions for changing a bulb in the given order → :

1. Park the vehicle on a flat and solid surface at a safe distance from the flow of traffic.
2. Apply the handbrake → page 134.
3. Turn the light switch to position **0** → page 75.

Checklist (Continued)

- Shift the turn signal lever to the neutral position → page 75.
- Shift the selector lever to position P → page 106.
- Stop the engine and remove the key from the ignition cylinder → page 98.
- Switch off the orientation lighting → page 75.
- Let the defective bulb cool down.
- Check to see if a fuse has blown → page 216.
- Change the faulty bulb as instructed → ⓘ; use a flashlight if necessary. Always use identical bulbs with the same designation. The designation is inscribed on the bulb, either on the glass part or on the base.
- Do not touch the glass part of the bulb with unprotected fingers. The heat of the bulb would cause the fingerprint to evaporate and condense on the reflector, compromising the brightness of the headlight.
- After changing the bulb, check to make sure that the bulb is working properly. If the bulb is not working properly, the bulb may not have been inserted properly or may have failed again, or the connector may have been inserted incorrectly.
- Each time you change a bulb in the front of the vehicle, the headlight settings should be checked by a Volkswagen Dealership or qualified workshop.

⚠ WARNING

Ignoring any of the points on this important safety checklist can lead to accidents and injuries.

- Always follow the instructions on the checklist and comply with applicable safety precautions.

ⓘ NOTICE

Always take care when removing or fitting lights to prevent damage to the paintwork or to other vehicle parts.

🌿 Burnt bulbs must not be disposed of as common trash, since they contain residues that are potentially harmful to the environment.

🌿 In order to help preserve the environment, Volkswagen recommends returning burnt bulbs to a Volkswagen Dealership or qualified workshop, in order for them to be properly disposed of based on specific legal requirements regarding handling, storage and disposal. ◀

Changing bulbs in the rear bodywork lights

📖 Please refer to ⚠ and ⓘ at the start of the chapter on page 214.

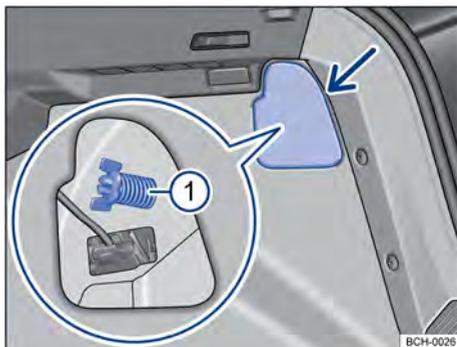


Fig. 176 In the luggage compartment remove the cover and remove the wingbolt ⓘ (magnifying glass)

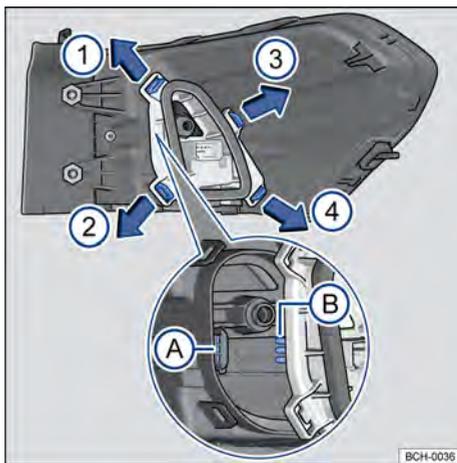


Fig. 177 Tail light: remove the bulb support ▶

The actions should only be carried out in the specified order.

- ① Observe and follow the instructions on the checklist → page 214.
- ② Open the boot lid.
- ③ To open the light cover, rotate the retainer → Fig. 176 (arrow).
- ④ Open the cover sideways together with the retainer.
- ⑤ Release the butterfly bolt ① (magnifying glass) and remove it while holding the tail light at the same time.
- ⑥ Carefully pull the tail light out to remove it from the bodywork → ①.
- ⑦ Disconnect the light bulb connector to completely remove the bulb.
- ⑧ Place the rear light in a smooth and even surface.
- ⑨ To unlock the bulb holder, press each locking pawl in the direction indicated by the arrows → Fig. 177.
- ⑩ Carefully remove the bulb holder.
- ⑪ To remove the burned out bulbs press the bulb against its holder and rotate counter-clockwise.
- ⑫ Replace the defective bulb with a new bulb of the same type.
- ⑬ Insert new bulbs into the respective bulb housing. Press the bulb and turn clockwise until reaching the stop.
- ⑭ Ensure that the bulbs are properly secured in the bulb holder.
- ⑮ Install the bulb support in the tail light, minding the housing contact blade fitting → Fig. 177 A and B. The locking pawls must audibly fit into place in the following sequence: → Fig. 177 ①, ②, ③ and ④.
- ⑯ Fit the bulb connector.
- ⑰ Carefully fit the rear light in the bodywork housing.
- ⑱ Hold the tail light in the installation position with one hand and install the butterfly bolt with the other hand → Fig. 176 ①.
- ⑲ Reposition the cover of the lamp in its position and rotate the lock to close.
- ⑳ Close the boot lid → page 65.

! NOTICE

- Always take care when removing or fitting rear lights into the bodywork, in order to prevent damage to the paintwork or to other vehicle parts.
- Volkswagen recommends special attention to some plastic parts with clamps, which might break when removing or fitting bulbs.

Troubleshooting

📖 Please refer to ⚠ and ! at the start of the chapter on page 214.

Depending on the vehicle version, the illumination indicator lamp may not be available.

Lighting

Central indicator lamp ⚠

💡 OR 🚫 plus additional text ^{Driving} illumination partially or totally out of order.

Check the vehicle lights and replace the respective bulb when burned out → page 213. Case all bulbs are in order or if there is a damage seek your Volkswagen Dealership.

Fuses

📖 Introduction

Several electrical consumers could share a single fuse. Conversely, a single consumer could have more than one fuse.

Therefore, fuses should only be replaced when the cause of a fault has been rectified. If a newly inserted fuse blows after a short time, the electrical system must be checked by a Volkswagen Dealership.

⚠ WARNING

Before initiating any work in the engine compartment, always read and observe the warning notes → page 225, *Safety guidelines for work in*

the engine compartment. The engine compartment of any motor vehicle is a dangerous area and may cause severe injuries.

⚠ WARNING

High voltages in the electrical system can cause electric shocks, severe burns and death!

- Never touch the electrical wiring of the ignition system.
- Avoid causing short-circuits in the electrical system.

⚠ WARNING

Using unsuitable or repaired fuses and bridging an electrical circuit without fuses can cause fires and severe injuries.

- Never fit fuses that have a higher fuse protection limit. Fuses must always be replaced with a new fuse which has the same amp rating (same colour and imprint) and size.
- Never repair a fuse.
- Never use a metal strip, paper clip or similar items to replace a fuse.

📌 NOTICE

- In order to avoid damage to the electrical system in the vehicle, the ignition, the lights and all electrical consumers must be switched off and the vehicle key removed from the ignition cylinder before changing a fuse.
- You can damage another position in the electrical system by using a fuse with a higher amp rating.
- Fuse boxes must be protected from dirt and moisture when opened. Dirt and moisture in the fuse boxes can damage the electrical system.

i A single consumer may have more than one fuse.

i Several consumers may share a single fuse. ◀

Fuses in the dash panel

📖 Please refer to **⚠** and **📌** at the start of the chapter on page 216.

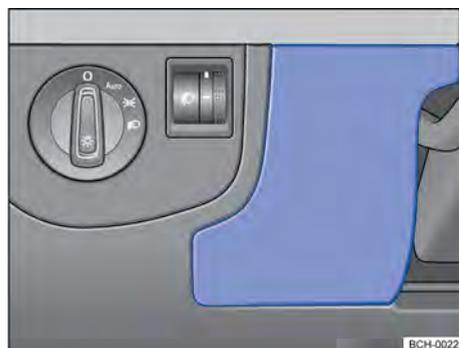


Fig. 178 On the driver's side of the dashboard: fuse box cover.

Fuses must always be replaced with a new fuse which has the same amp rating (same colour and imprint) and size.

Opening the fuse box in the dash panel

- Hold the fuse box cover → Fig. 178 and pull forward.
- To *install*, put the cover on the fuse box of the dash panel and press until it audibly engages.

📌 NOTICE

- Remove the covers for the fuse boxes carefully and install them again properly so as to avoid damage to the vehicle.
- Fuse boxes must be protected from dirt and moisture when opened. Dirt and moisture in the fuse boxes can damage the electrical system. ◀

Fuse box in the dashboard

📖 Please refer to ⚠️ and ⓘ at the start of the chapter on page 216.

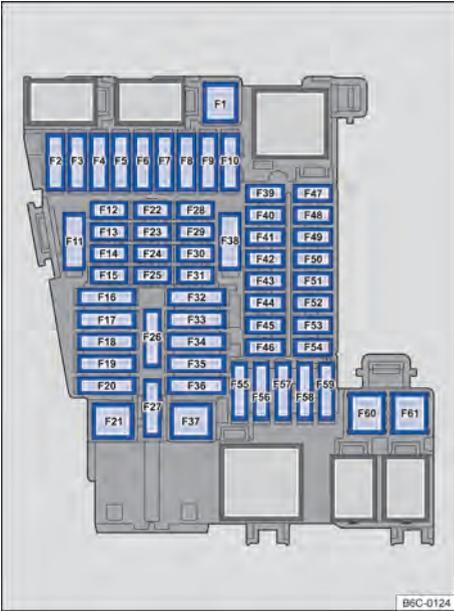


Fig. 179 On the dash panel: fuses arrangement.

Some fuses may be specific to certain versions.

Locations with respective functions for equipment that may be available in your vehicle are provided below:

- F1 Free
- F2 USB sockets
- F3 Free
- F4 Free
- F5 Free
- F6 Central locking
- F7 Free
- F8 Interior ventilation (Climatronic)
- F9 Free
- F10 Free
- F11 Free
- F12 Free
- F13 Diagnostic socket/ rain and brightness sensor/ turn signals lever and window wiping lever (BCM Standard)/ light switch (BCM Standard)

- F14 Wiper lever / Wiper system / Window washing system
- F15 Instrument cluster
- F16 Vehicle exterior lighting - part 1 (BCM Standard)
 - or Turn signals and brake lights - part 1 (BCM Standard)
- F17 Electric window regulators - front right/ Electric window regulators - rear right/ Electric right hand side exterior mirror/ Exterior mirror tilt down
- F18 Windscreen wiper
- F19 Radio
- F20 Rear window heating
- F21 Ignition lock/ starter motor solenoid (ignition lock start)
- F22 Free
- F23 Rear view camera system
- F24 USB socket / Wireless Charger
- F25 Multifunction steering wheel
- F26 Electronic control unit (only vehicles equipped with Adaptive Cruise Control (ACC))
- F27 Free
- F28 Ultrasound sensor (alarm)
- F29 Free
- F30 Free
- F31 Climatronic control unit
 - or Air conditioner control unit
- F32 Ignition lock
- F33 Electric window regulators - front left/ Electric window regulators - rear left/ Electric left hand side electric exterior mirror
- F34 Free
- F35 Vehicle exterior lighting - part 2 (BCM Standard)
 - or Turn signals and brake lights - part 2 (BCM Standard)
- F36 Horn
- F37 Free
- F38 Electronic control unit / Interior lighting (BCM Standard)
- F39 Parking sensor control unit / Adaptive Cruise Control (ACC) unit
- F40 Light switch (BCM Standard) / Reverse gear light switch / Diagnostic socket / Interior mirror / Rear view camera / Headlight range adjustment switch
- F41 Free

- F42 Clutch sensor/ Relay 1 of pull-away assist system/ Relay 2 of pull-away assist system/ Air conditioner pressure switch
- F43 Rear window wiper
- F44 Airbag system
- F45 Left headlight assembly with LED technology
- F46 Right headlight assembly with LED technology
- F47 Right side number plate light (BCM Entry) / Left side number plate light (BCM Entry)
- F48 Keyless Access control unit
- F49 Left dipped beam (BCM Entry)
- F50 Right dipped beam (BCM Entry)
- F51 Free
- F52 Free
- F53 Automatic gearbox selector lever / Ignition key removal lock (only for vehicles with automatic gearbox and no Keyless Access)
- F54 Free
- F55 12 V socket
- F56 Interior ventilation
- F57 Free
- F58 Windscreen and rear window washers
- F59 Free
- F60 Free
- F61 Free

Opening the fuse box in the engine compartment

- Open the bonnet  → page 227.
- Press the retainers in the direction of the arrow → Fig. 180  to release the fuse box cover.
- Remove the cover from the top.
- To *install*, place the cover on the fuse box and press down until the cover audibly locks on both sides.

On the inside of the engine compartment fuse box cover there may be a pair of plastic tweezers → Fig. 180  to extract the fuses.

NOTICE

- Remove the covers for the fuse boxes carefully and install them again properly so as to avoid damage to the vehicle.
- Fuse boxes must be protected from dirt and moisture when opened. Dirt and moisture in the fuse boxes can damage the electrical system.

Fuses in the engine compartment

 Please refer to  and  at the start of the chapter on page 216.

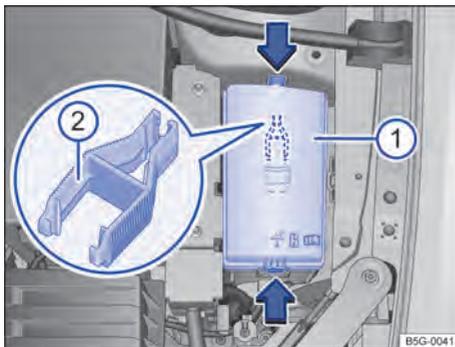


Fig. 180 In the engine compartment: fuse box cover  with plastic claw .

Fuse box in the engine compartment

📖 Please refer to ⚠️ and ⌚ at the start of the chapter on page 216.

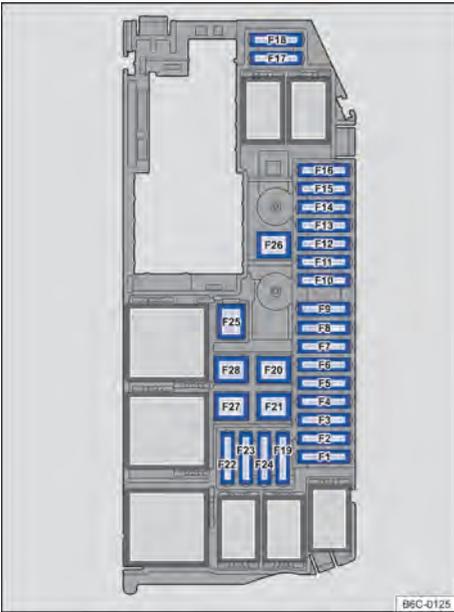


Fig. 181 In the engine compartment: fuse arrangement.

Some fuses may be specific to certain versions. Locations with respective functions for equipment that may be available in your vehicle are provided below:

- F1 Engine control unit
- F2 Fuel metering valve (TSI engine) / Water pump (TSI engine)
- F3 Lambda probe before catalytic converter / lambda probe after catalytic converter
- F4 Fuel pump
- F5 Radiator fan – electronics (TSI engine) / Oil pressure control valve (TSI engine) / Variable control shaft - intake / Variable control shaft - exhaust (TSI engine) / Activated charcoal filter valve / Ethanol sensor (TSI engine)
- F6 Ignition coils
- F7 Vacuum pump
- F8 Free

- F9 Brake pedal sensor
- F10 Electronic control unit
- F11 Free
- F12 Air Conditioning Compressor
- F13 Free
- F14 Injection system main relay / Engine control unit/ ABS/ESC control unit
- F15 Automatic gearbox control unit
- F16 Free
- F17 Pull-away assist
- F18 Start assist(starter)
- F19 Free
- F20 ABS control unit
or ESC control unit
- F21 ABS/ESC control unit
- F22 Free
- F23 Free
- F24 Free
- F25 Free
- F26 Radiator fan (TSI engine)
- F27 Secondary air pump (1.4 TSI engine)
- F28 Free

Fuse box in the engine compartment on the battery

📖 Please refer to ⚠️ and ⌚ at the start of the chapter on page 216.

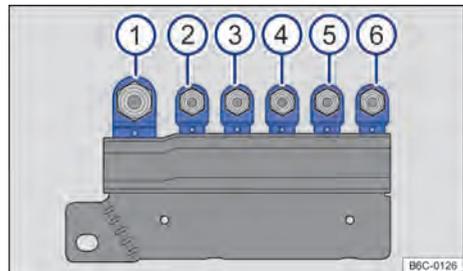


Fig. 182 In the engine compartment on top of the battery: fuse arrangement.

Fuses are located in the engine compartment, above the vehicle battery → ⚠️ in *Introduction* on page 216. ▶

Fuses in the engine compartment must only be replaced by a qualified workshop. Volkswagen recommends using a Volkswagen Dealership for this purpose.

Locations with respective functions and amp rating for equipment that may be available in your vehicle are provided below:

- ① 350 A, alternator.
- ② 80 A, free.
- ③ 150 A, engine compartment fuse box power supply.
- ④ 80 A, power supply 2 of the dash panel fuse box.
- ⑤ 125 A, power supply 1 of the dash panel fuse box.
- ⑥ 80 A, power steering.

Changing a blown fuse

📖 Please refer to ▲ and ⌚ at the start of the chapter on page 216.

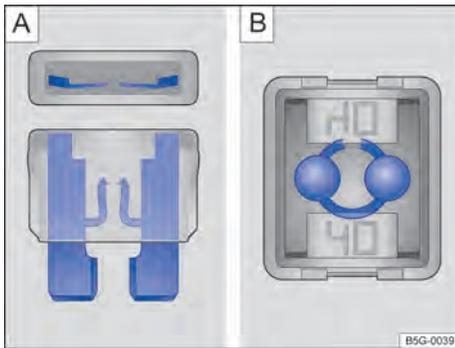


Fig. 183 Blown fuse: [A] flat fuse, [B] blocking fuse.

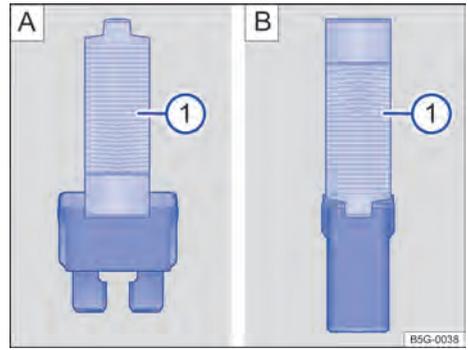


Fig. 184 Removing or installing the fuse with the plastic claw: [A]: flat fuse, [B] blocking fuse.

Fuse versions

- Flat standard blade fuse (ATO®).
- Small flat blade fuse (MINI®).
- Cartridge fuse (JCASE®).

Fuse colour coding

Fuses (ATO - MINI)

Colour Nominal current in amperes

- black 1 A
- light brown 5 A
- brown 7.5 A
- red 10 A
- blue 15 A
- yellow 20 A
- white or clear 25 A
- green 30 A
- orange 40 A

Fuses (JCASE)

Colour Nominal current in amperes

- blue 20 A
- white or clear 25 A
- pink 30 A
- green 40 A
- red 50 A
- yellow 60 A

Preparations

- Switch off the ignition, the lights, and all electrical consumers.
- Open the respective fuse box → page 217. ▶

Detecting a blown fuse

- Shine a flashlight onto the fuse. This will help you to spot the blown fuse more easily.
- A blown *blade fuse* (ATO®, MINI®) is detected from above or from the side through its transparent body by the melted metal strip → Fig. 183 A.
- A blown *cartridge fuse* (JCASE®) is detected from above by the melted metal strip visible through the transparent housing → Fig. 183 B.

Changing a fuse

- If applicable, take the plastic tweezers → Fig. 184 ① out of the fuse box cover.
- According to the fuse type, apply the proper claw of the plastic tweezers → Fig. 184 A ① or → Fig. 184 B ① to the fuse sides.
- Pull out the blown fuse.
- If the fuse has blown, replace it with a new fuse of the *same* amp rating (same colour and same imprint) and *same* size → ①.
- After having replaced the fuse place the plastic claw pliers, if existing, back onto the cover.
- Install the fuse box cover.

NOTICE

You can damage another position in the electrical system by using a fuse with a higher amp rating. ◀

Jump starting

Introduction

If the engine fails to start because of a discharged 12 V vehicle battery, it is possible to use another 12V battery from another vehicle to jump start the engine.

The discharged vehicle battery must be properly connected to the vehicle's electrical system.

The jump leads must have sufficient length to ensure proper distance between the vehicles.

WARNING

Using the jump leads incorrectly or completing the jump start procedure incorrectly can cause the battery to explode, which can lead to se-

vere injuries. Please note the following points in order to reduce the risk of the battery exploding:

- All work on the vehicle battery and the electrical system can cause serious chemical burns, fire and electric shocks. Always read the warnings and safety information before carrying out any kind of work on the vehicle battery → page 238, *Vehicle battery*.
- The assistance providing vehicle's battery must be of the same voltage as the discharged vehicle battery (12-volt) and be approximately of the same capacity (see imprint on battery).
- Never charge a frozen or defrosted vehicle battery. A discharged vehicle battery can even freeze at temperatures of around 0° C (+32° F).
- The battery should be replaced if it has frozen or defrosted.
- A highly explosive mixture of gases is given off when jump starting the vehicle battery. Always keep fire, sparks, naked flames and lit cigarettes away from the vehicle battery. Never use a mobile telephone when the jump leads are being connected or disconnected.
- Only charge the battery in a well-ventilated space as the battery emits a highly explosive mixture of gases when the vehicle is being jump started.
- Position the jump leads so that they never come into contact with any moving parts in the engine compartment.
- Never confuse the negative and positive terminals or connect the jump leads incorrectly.
- Observe the jump lead manufacturer's instructions.

NOTICE

Please note the following in order to avoid considerable damage to the vehicle electrical system:

- short circuit can be caused if the jump leads are connected incorrectly.
- The vehicles must not touch each other, otherwise electricity could flow as soon as the positive terminals are connected. ◀

Jump starting point (grounding point)

📖 Please refer to ⚠ and ⓘ at the start of the chapter on page 222.

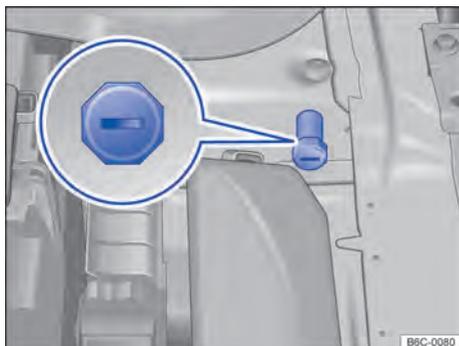


Fig. 185 On the engine compartment: jump starting point (grounding point).

The jump starting point is available for vehicle with Start-Stop System.

There is a jump starting point in the engine compartment – located on the interior wheel housing on the engine side, to connect the *black* → Fig. 185 jump lead.

The jump starting point is not designed to jump start other vehicles.

Only jump start the vehicle (grounding point) through this point.

How to start the engine using jump leads

📖 Please refer to ⚠ and ⓘ at the start of the chapter on page 222.

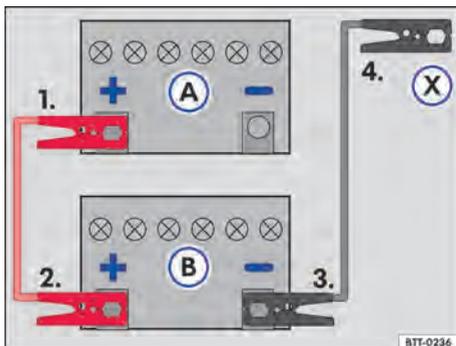


Fig. 186 Jump lead attachment diagram: discharged vehicle battery (A) and battery in the vehicle providing assistance (B).

Key for → Fig. 186:

- (A) Vehicle with discharged vehicle battery which is getting jump starting assistance.
- (B) Vehicle with the current supplying battery assisting jump starting.
- (X) Proper grounding point: jump starting point (grounding point) or a solid metal part firmly bolted to the cylinder block.



The discharged vehicle battery must be properly connected to the vehicle's electrical system.

The vehicles must not touch each other. Otherwise electricity could flow as soon as the positive terminals are connected.

Make sure the battery clamps have good metal-to-metal contact with the battery terminals.

If the engine does not start immediately, switch off the starter after about 10 seconds and try again after about one minute.

Attaching the jump leads

Connect the jumper cable strictly following the sequence 1 - 2 - 3 - 4 → Fig. 186.

- Switch off the ignition in both vehicles → page 98.
- Open the positive terminal cover. ▶

- Connect one end of the *red* jump lead to the positive terminal (+) of the vehicle with the discharged battery → Fig. 186(A) → ▲.
- Connect the other end of the *red* jumper lead to the positive (+) terminal of the assisting battery (B).
- Connect one end of the *black* jumper lead to the negative terminal of the assistance supply battery (B).
- Connect the other end of the *black* jump lead (X) to the vehicle with the discharged battery. Connect it to the screwed-in towing eye at the front, a solid metal component which is bolted on to the engine block, or to the engine block itself. However, do not connect it to a point near the vehicle battery (A) → ▲.
- Position the leads in such a way that they cannot come into contact with any moving parts in the engine compartment.

Starting the engine

- Start the engine of the vehicle which is providing assistance and let it run at idle.
- Start the engine of the car with the discharged vehicle battery and wait two to three minutes until the engine is “running smoothly”.

Removing the jump leads

- Before disconnecting the jump leads, switch off the dipped beam headlights if they are switched on.
- Turn the air conditioner and the rear window defroster heating of the vehicle with the flat battery on to reduce voltage peaks when disconnecting the jumper leads.
- Disconnect the jumper cable with the now started engine running exactly in the connection reverse sequence 4 – 3 – 2 – 1.
- Close the positive battery terminal cover.

! WARNING

Jump starting the vehicle incorrectly can cause the battery to explode, which can lead to serious injuries. Please note the following points in order to reduce the risk of the battery exploding:

- All work on the vehicle battery and the electrical system can cause serious chemical burns, fire and electric shocks. Always read the warnings and safety information before carrying out any kind of work on the vehicle battery → page 238, *Vehicle battery*.

- Make sure there is no one inside the vehicle when connecting battery jump leads. In case of electrical failure, airbags may be accidentally engaged and cause severe or even fatal injuries to vehicle occupants.
- Always wear suitable eye protection and never lean over the vehicle battery.
- Attach the connector cables in the correct order – the positive cable first, followed by the negative.
- Never connect the negative cable to parts of the fuel system or to the brake hose/pipe.
- Non-insulated parts of the battery clamps must not be allowed to touch. Additionally, the jump lead attached to the positive vehicle battery terminal must not touch metal parts of the vehicle.
- Check the window on the vehicle battery using a flashlight if necessary. If the display is light yellow or colourless, do not jump start the vehicle. Seek expert assistance.
- Avoid electrostatic discharge in the vicinity of the vehicle battery. The gas emitted from the vehicle battery could be ignited by sparks.
- Never use jump starting to start the engine if the vehicle battery is damaged, frozen or has defrosted.

! NOTICE

Incorrectly attached jump leads could result in substantial damages to the vehicle's electrical system.

Tow starting and towing

📖 Introduction

For technical reasons, vehicles must not be tow started. Use jump leads to start the engine instead → page 222.

For technical reasons, vehicles with a discharged battery must not be tow started. Jump start the engine instead → page 222.

Towing

Whenever it is necessary to tow your vehicle, use a specialized towing service, using tow trucks or platforms.

When using tow trucks, the vehicle must be securely fastened by the front wheels. Ensure that no gears are selected and the handbrake lever is not applied.

NOTICE

Always comply with applicable traffic laws regarding towing.

Checking and refuelling In the engine compartment

Safety guidelines for work in the engine compartment

Always park the vehicle on a levelled and stable surface before carrying out any work in the engine compartment.

The engine compartment of a motor vehicle is a hazardous area. Never carry out any work on the engine or in the engine compartment if you are not familiar with the necessary procedures and the general safety requirements, as well as without the suitable tools, fluids and resources available → . If necessary, such work must be carried out by a Volkswagen Dealership. Serious injuries can be caused if work is carried out incorrectly.

WARNING

Unintentional vehicle movements during service work can cause serious injury.

- Never work underneath a vehicle if it is not secured against rolling away. If you are working underneath the vehicle while the wheels are on the ground, the vehicle must be on a level, the wheels must be blocked and the vehicle key must be removed from the ignition cylinder.
- If you have to work underneath the vehicle, use suitable stands to provide extra support. The vehicle jack is not sufficient for this task and can fail, which can lead to serious injuries.
- The Start-Stop system must be manually disabled.

WARNING

The engine compartment of any motor vehicle is a dangerous area and may cause severe injuries!

- The utmost care and attention must be paid when carrying out any work and you must follow the general safety rules. Never take any risks.
- Never do any work on the engine or in the engine compartment unless you know exactly how to carry it out. If you are uncertain of

what to do, the work should be carried out by a Volkswagen Dealership. Serious injuries can result from work that has not been carried out properly.

- Never open the cover if you see steam or coolant escaping from the engine compartment. Hot steam or coolant can cause severe burns. Always wait until you can no longer notice steam or coolant coming from the engine compartment.
- Always let the engine cool down before opening the engine compartment cover.
- Hot parts of the engine or exhaust system may burn the skin.
- Before opening the engine compartment cover once it has cooled down:
 - Apply the handbrake and move the selector lever to position **P** or the manual gear lever to the neutral position.
 - Turn the ignition off and remove the vehicle key from the ignition lock.
 - Always keep children away from the engine compartment and never leave the vehicle unattended.
- The engine cooling system is under pressure when the engine is hot. Never open the cap of the coolant expansion tank when the engine is hot. Coolant may spray out and cause severe burns and injuries.
 - After cooling, turn the cap slowly and very carefully anticlockwise while exerting some downwards pressure on the cap.
 - Always protect the face, hands and arms from hot coolant or steam with a large, thick cloth.
- When refilling, do not spill any service fluids on engine components or on the exhaust system. Spilt service fluids may start fires.

WARNING

The high voltage in the electrical system can cause electric shocks, burns, serious injuries and death!

- Never short circuit the electric system. The vehicle battery could explode.
- Please note the following guidelines to help reduce the risk of an electric shock and serious injuries while the engine is running or being started:
 - Never touch the electrical wiring of the ignition system.

- Never touch electrical wiring.

WARNING

There are rotating components in the engine compartment that can cause serious injury.

- Never touch the radiator area or fan directly. Touching the rotary blades may result in severe injuries. The fan is temperature-controlled and can start automatically, even if the engine has been switched off and the vehicle key has been removed from the ignition cylinder.
- If any work has to be performed when the engine is started or with the engine running, there is an additional, potentially fatal, safety risk from the rotating parts, such as the Poly-V or drive belts, alternator, radiator fan, etc., and from the high-voltage ignition system. Always be extremely cautious.
 - Always ensure that no body parts, jewellery, ties, loose items of clothing or long hair can be caught up in rotating engine components. Before starting work, remove any jewellery and ties, tie up long hair and pull clothes in tightly to avoid them getting caught in the engine compartment.
 - Always depress the accelerator carefully and never thoughtlessly. The vehicle can move even while the handbrake is applied.
- Always make sure you have not left any objects, such as cleaning cloths and tools, in the engine compartment. Any forgotten items can cause malfunctions, engine damage and fires.

WARNING

Additional insulations such as covering the engine compartment, may damage the running of the engine, cause fire and severe injuries.

- Never cover the engine with covers or other isolations.

WARNING

Operating fluids and some materials in the engine compartment are highly flammable and may cause fires and severe injuries!

- Never smoke around the engine compartment.
- Never work near naked flames or sparks. ▶

- Never spill fluids onto the engine. They could ignite on hot engine components and cause injuries.
- Please note the following when carrying out any work on the fuel system or the electrical system:
 - Always disconnect the vehicle battery. Ensure that the vehicle is unlocked before the battery is disconnected. Otherwise, the alarm system will be activated.
 - Never work in the direct proximity of heating systems, water heaters or any other open flames.

NOTICE

When refilling or changing operating fluids please ensure that the fluids are in the correct container. Incorrect operating fluids can cause serious functional problems and engine damages!

 Service fluids leaks are harmful to the environment. Regularly check the ground underneath your vehicle. If there are spots of oil or other fluids on the ground, the vehicle must be inspected by a Volkswagen Dealership.

Preparing the vehicle for working in the engine compartment

Checklist

The following steps should always be carried out in the specified order before working in the engine compartment → :

- ✓ Park the vehicle on a levelled and stable surface.
- ✓ Depress and hold the brake pedal until the engine has stopped.
- ✓ Apply the handbrake → page 134.
- ✓ Position the gear shift lever in the neutral position → page 104 or move the selector lever to position **P** → page 106.
- ✓ Stop the engine and remove the key from the ignition lock.
- ✓ Allow the engine to cool down sufficiently.
- ✓ Children and other people should be kept well away from the engine compartment.
- ✓ Ensure that the vehicle cannot roll away unexpectedly.

WARNING

Ignoring any of the points on this important safety checklist can lead to accidents and injuries.

- Always follow the instructions on the checklist and comply with applicable safety precautions.

Opening and closing the engine compartment cover

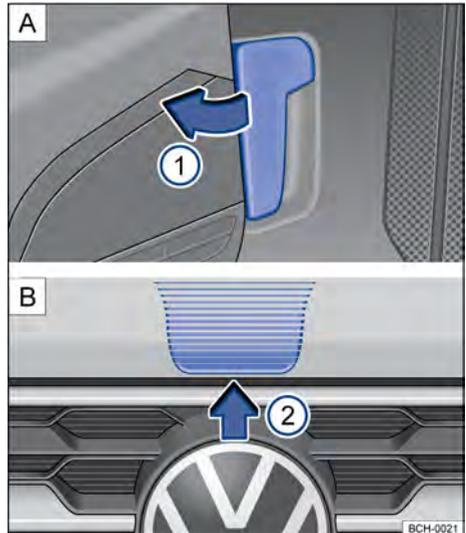


Fig. 187 **A** Bonnet release lever on the driver side footwell. **B** Bonnet release lever on the inner side of the bonnet.

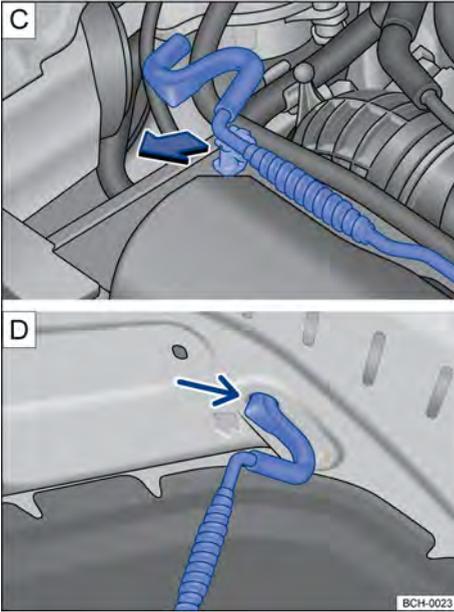


Fig. 188 [C] Bonnet stay. [D] Bonnet secured with the bonnet stay.

Opening the engine compartment cover

- Ensure that the windscreen wiper arms are positioned on the windscreen before opening the bonnet → ①.
- Open the driver door and pull the release lever in the direction indicated by the arrow → Fig. 187 [A] ①. The bonnet is released from its lock by a spring mechanism → ▲.
- To fully open the bonnet raise it slightly and at the same time press the release lever on the inner side of the bonnet in the direction indicated by the arrow → Fig. 187 [B] ②.
- Take the bonnet stay out of the holder as indicated by the arrow → Fig. 188 [C] and insert it into the opening in the bonnet → Fig. 188 [D].

Closing the engine compartment cover

- Lift the bonnet slightly → ▲.
- Take the bonnet stay out of the opening in the bonnet → Fig. 188 [D] and place it back into its resting position holder on the lock carrier → Fig. 188 [C].
- Release the bonnet at approximately 20 cm from the lock – *do not* press down!

If the bonnet is not closed, open it again and close it properly.

The engine compartment cover sits flush with the body parts around it when it is closed properly.

⚠ WARNING

When the open bonnet supported by the bonnet stay, do not push or apply additional force to close the bonnet, since this could cause bonnet damages and severe injuries.

⚠ WARNING

If the engine compartment cover is not closed properly, it can open suddenly while you are driving and completely obscure your view of the road. This could lead to accidents and severe injuries.

- After closing the engine compartment cover, always check that it is properly secured. The engine compartment cover must be flush with the surrounding body panels.
- If you notice that the bonnet is not closed properly while the vehicle is in motion, stop the vehicle as soon as possible and close the bonnet.
- Open or close the engine compartment cover only when you are sure that nobody is in its path.

ⓘ NOTICE

The bonnet should only be opened when the wiper arms are flush to the windows in order to avoid damage to the bonnet and window wiper arms.

Display indication

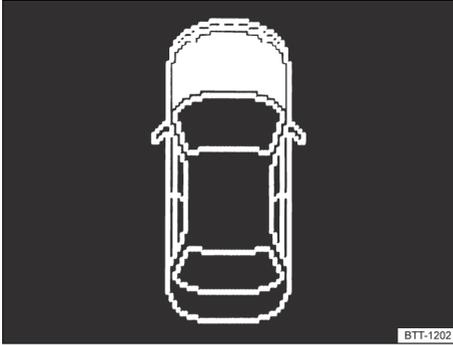


Fig. 189 On the instrument cluster display: incorrectly closed or open bonnet (schematic representation).

According to the version of the vehicle the representation of the bonnet on the display may not be available.

A symbolic representation → Fig. 189 on the instrument cluster display indicates that the bonnet is open or is not correctly closed.

STOP **Stop driving!** if necessary lift and close the bonnet again.

The representation is also visible with the ignition turned off and is deleted a few minutes after the vehicle is locked with closed doors.

WARNING

Not heeding the warning indications may cause stoppages of the vehicle in the traffic, accidents and severe injuries.

- Never ignore lit warning lamps.
- Stop the vehicle as soon as possible and safe to do so.



According to the instrument cluster model, the display of the icons may vary.

Service fluids and consumables

All service fluids and consumables, e.g. toothed belts, tyres, coolant, engine oil, spark plugs and vehicle batteries, are being constantly perfected. For this reason, service fluids and consumables should be replaced at a Volkswagen

Dealership or qualified workshop. Volkswagen Dealerships are always updated about innovations.

WARNING

Unsuitable service fluids and consumables, and the incorrect use of these fluids and consumables, can cause accidents, serious injuries, burns or poisoning.

- Service fluids must be kept in their original sealed container.
- Never store service fluids in empty food containers, bottles or any other non-original containers as people finding these containers could drink them.
- Keep children away from all service fluids and consumables.
- Always read and follow the information and warnings on the service fluid packaging.
- When using products that give off harmful fumes, always work outdoors or in a well ventilated area.
- Never use fuel, turpentine, engine oil, nail varnish remover or other volatile fluids to wash, clean or care for your vehicle. These substances are poisonous and highly flammable. They could cause fires and explosions!

NOTICE

- Only use suitable service fluids for refilling. Never use the service fluids not recommended. Failure to observe this warning can result in serious faults and engine damages!
 - Optional equipment and other accessories in front of the air inlet reduce the cooling effect of the coolant. The engine may overheat at high ambient temperatures and high engine loads!
- ◀  Service fluids leaks are harmful to the environment. Regularly check the ground underneath your vehicle. If there are spots of oil or other fluids on the ground, the vehicle must be inspected by a Volkswagen Dealership. ▶

Washer fluid



Fig. 190 On the engine compartment: window washer fluid reservoir cap.

The window washer fluid level should be checked regularly and topped up as necessary.

- Open the bonnet  → page 225.
- The washer fluid reservoir is identified by the  symbol on its cap → Fig. 190.
- Check whether there is enough window washer fluid in the reservoir.
- To top up, mix clean water with a washer fluid recommended by Volkswagen → . Observe the dilution instructions on the packaging.
- At low temperatures, add a special antifreeze agent so that the fluid cannot freeze → .

Check the window washer water reservoir capacity in → page 283.

WARNING

Never mix antifreeze or other unsuitable additives into the window washer fluid. An oily film may otherwise be left on the screen, compromising visibility.

- Use clean water with a washer fluid recommended by Volkswagen.
- Suitable antifreeze agents may be added to the window washer fluid, if necessary.

NOTICE

- Never mix other cleaning agents with the cleaning agents recommended by Volkswagen. This may cause the components to coagulate and, as a result, clog the window wiper nozzles.

- Never mix up service fluids when refilling! Failure to observe this warning can result in serious faults and engine damages! 

Engine oil

Introduction

WARNING

Incorrect handling of engine oil can cause severe burns and injuries.

- Always wear eye protection when handling engine oil.
- Engine oil is toxic and must be stored out of the reach of children.
- Engine oil must be kept in the closed original container. This also applies to used oil before proper disposal.
- Never use empty food containers, bottles or other containers to store engine oil, since other people may then drink the engine oil.
- Regular contact with engine oil can damage the skin. Skin that has been in contact with engine oil should be washed thoroughly with water and soap.
- Engine oil becomes extremely hot when the engine is running and may scald skin severely. Always allow the engine to cool down.

 Leaking or spilt engine oil can pollute the environment. In order to prevent such event, replace the engine oil preferably at a Volkswagen Dealership, which is equipped with special tools and qualification to properly dispose of used engine oil.

- If engine oil or other fluid stains are found on the floor, underneath the vehicle, Volkswagen recommends inspecting the vehicle, preferably at a Volkswagen Dealership. 

Engine oil specification

 Please refer to  at the start of the chapter on page 230.

VW 508 88 is the standard engine oil in your Volkswagen. This standard must be described on the oil packaging. Engine oils approved by Volkswagen are available at Volkswagen Dealerships.

When refuelling, engine oils approved by Volkswagen according to the **VW 508 88** standard can be mixed with each other.

If, in an emergency, no approved **VW 508 88** standard engine oil is available, you may temporarily use an engine oil that meets the following requirements: ACEA A3/B4 specification with the following viscosity grades: **SAE 0W 30, SAE 0W 40, SAE 5W 30, SAE 5W 40, SAE 10W 30** or **SAE 10W 40**. However, we recommend seeking a Volkswagen Dealership as soon as possible for the oil change with factory approved engine oil.

Engine oil specifications are available in the product package.

Engine oils are constantly being developed and improved. Volkswagen Dealerships are always updated about innovations. That is why Volkswagen recommends having engine oil changes performed at a Volkswagen Dealership.

NOTICE

- Use only expressly Volkswagen approved engine oil specifications. Using other engine oils may cause damages to the engine!
- Do not mix additional lubricating additives to the engine oil. Damages caused by such additives are not covered by the warranty.
- Damages to the engine caused by using oil that does not meet the VW 508 88 standard are excluded from the warranty.

Changing the engine oil

 Please refer to  at the start of the chapter on page 230.

The engine oil must be changed regularly as described in → page 260. Ensure that such frequency is followed, especially when the vehicle is used in adverse conditions, which requires greater frequency of such services.

The engine oil and filter must be changed by qualified workshops due to the fact that such procedure requires special tools and expertise. This also ensures proper disposal of used oil. Volkswagen recommends using a Volkswagen Dealership for this purpose.

More information on service intervals can be found at → page 260.

WARNING

If, in exceptional cases, you have to carry out an oil change yourself, please note the following:

- Always wear eye protection.
- Always allow the engine to cool down completely to avoid burns.
- Keep your arms horizontal when removing the oil drain plug with your fingers to help prevent oil from running down your arm.
- Use a suitable container when draining the used oil. It must be at least large enough to hold the entire quantity of engine oil required for refilling.
- Never store engine oil in empty food containers, bottles or any other non-original containers as people finding these containers may not know that they contain engine oil.
- Engine oil is toxic and must be stored out of the reach of children.

NOTICE

Do not mix additional lubricating additives to the engine oil. Damages caused by such additives are not covered by the warranty.

 Volkswagen recommends replacing the oil and filter preferably at a Volkswagen Dealership, which is equipped with special tools and qualification to properly dispose of used engine oil.

- Never dispose of old oil in locations such as gardens, woods, sewerage systems, on streets and roads, or in rivers and waterways.
- In order to completely drain used oil, use an appropriate and sufficient recipient to collect all of the engine oil; refer to → page 283, *Capacities*.

Engine oil consumption

📖 Please refer to ⚠ at the start of the chapter on page 230.

Engine oil consumption may vary from engine to engine. Due to the design of internal combustion engines, in order to adequately lubricate components, part of the engine oil is consumed during normal engine operation. Therefore, engine oil consumption may vary throughout the engine's service life. In addition, depending on driving behaviors and vehicle use conditions, oil consumption may reach up to 0.5 l in 1,000 km. Engine oil level must therefore be checked at regular intervals – preferably when refuelling and before long journeys.

When the engine is working hard, the oil level must be kept within the → Fig. 191 (A) area – for instance during long motorway cruising in summer or climbing mountain passes.

Checking the engine oil level and refilling engine oil

📖 Please refer to ⚠ at the start of the chapter on page 230.

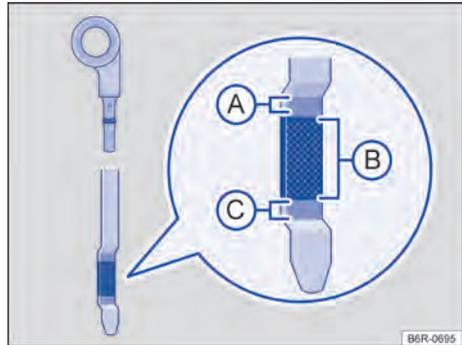


Fig. 191 Oil dipstick with markings.



Fig. 192 On the engine compartment: engine oil opening lid.

Key for → Fig. 191:

- (A) No filling up required.
- (B) Engine oil level in order.
- (C) Engine oil level too low - fill engine oil up.

Checklist

Carry out the steps in the specified order → ⚠:

1. With the engine at **operating temperature**, park the vehicle on a level surface to ensure that the engine oil reading is correct.
2. Switch off the engine and wait a few minutes for the engine oil to flow back into the sump.
3. Open the bonnet ⚠ → page 225. ▶

Checklist (Continued)

- Identify the engine oil filler cap and oil dipstick. The engine oil filler opening bears the  symbol on the cap → Fig. 192 and the oil dipstick has a coloured handle. If you cannot find the cap and dipstick please contact a Volkswagen Dealership or qualified workshop.
- Pull the dipstick out of the guide tube and wipe it off with a clean cloth → ①.
- Insert the oil dipstick into the guide tube again as far as it will go. If the oil dipstick has a marking, it must be adjusted to the corresponding groove on the upper edge of the guide tube upon insertion.
- Pull the dipstick out again and read the engine oil level on the dipstick → Fig. 191 as follows:
 - do not** refill oil → ①. Proceed to step 16.
 - proper oil level. Refill with oil (approximately 0.5 l). Proceed to step 8 or 16.
 - recommended oil **must** be refilled until level reaches region **B**. Proceed to step 8.
- After reading the oil level, push the oil dipstick back into the guide tube as far as it will go.
- Unscrew the engine oil filler opening cap → Fig. 192.
- Only refill with engine oils approved by Volkswagen gradually, in small quantities (up to 0.5 l).
- To avoid overfilling, wait for approximately one minute after each pour to allow the engine oil to flow into the oil sump up to the marking on the engine oil dipstick.
- Read the engine oil level from the dipstick again before refilling with a further small quantity of engine oil. Never overfill engine oil → ①.
- After the refilling procedure, the engine oil level must be at least in the centre of area → Fig. 191 **B**, but never above area **A** → ①.
- If excess oil is accidentally refilled and the engine oil level is above the → Fig. 191 **A** mark, **do not start the engine**. Go to a Volkswagen Dealership or qualified workshop.
- After refilling, screw the engine oil filler cap back on correctly.

16. Correctly insert the oil dipstick into the guide tube again as far as it will go.

17. Close the bonnet correctly  → page 225.

Check the engine oil level in → page 283.

WARNING

Engine oil can ignite if it comes into contact with hot engine components. This may cause fires, serious burns and injuries.

- If engine oil is spilt on cold engine parts it can heat up and ignite when the engine is running.
- Always ensure that the engine oil filler cap is securely tightened after refilling, and that the dipstick is properly inserted back into the guide tube. This will prevent the engine oil from draining out on to hot engine components when the engine is running.

NOTICE

- Do not start the engine when the engine oil level is above the range → Fig. 191 **A**. Go to a Volkswagen Dealership or qualified workshop. The catalytic converter and the engine could otherwise be damaged!
- When refilling or changing operating fluids please ensure that the fluids are in the correct container. Incorrect operating fluids can cause serious functional problems and engine damages.

NOTICE

Use only cloths that don't shred to clean the oil dipstick, since such shredding could damage the engine.

 The engine oil level must never exceed the → Fig. 191 **A** region, otherwise, the oil may be aspirated by the crankcase ventilation and discharged into the atmosphere by the exhaust system. Additionally, oil may be combusted inside the catalytic converter, damaging it.

 Leaking or spilt engine oil can pollute the environment. In order to prevent such event, Volkswagen recommends replacing the engine oil preferably at a Volkswagen Dealership, which is equipped with special tools and qualification to properly dispose of used engine oil. 

Troubleshooting

📖 Please refer to ⚠️ at the start of the chapter on page 230.

Warning lamps and text messages may light up and be displayed on the instrument cluster display. In addition, acoustic signals may be sounded.

Engine oil

Central warning lamp ⚠️

and 🛑 **On:** engine oil pressure too low. 🛑
Stop driving! Switch off the engine. Check the engine oil and refill if necessary → page 232. If the warning light remains lit and the oil level is suitable, *do not* drive on or keep the engine running. The engine could otherwise be damaged. Get immediate assistance from a Volkswagen dealership or specialized company.

and 🛢️ **Fill up with engine oil.** Engine oil level too low. Switch off the engine. Check engine oil level → page 232.

Central warning lamp ⚠️

and 🛢️ **Check oil level.** Engine oil level too low. Switch off the engine. Check engine oil level → page 232.

and 🛢️ **On:** Engine oil level very low. Switch off the engine. Check engine oil level → page 232.

and 🛢️ **Flashing:** engine oil system damaged. Get immediate assistance from a Volkswagen dealership or specialized company.

⚠️ WARNING

Failure to observe the warning lamps and text messages could lead to your vehicle breaking down in traffic, and to accidents and serious injuries.

- Never ignore warning lamps or text messages.
- Stop the vehicle as soon as possible and when safe to do so.

📖 The oil pressure warning lamp 🛑 is not indicative of the engine oil level. The engine oil level must be controlled in regular intervals, preferably whenever the tank is filled. ◀

Engine coolant

📖 Introduction

Never carry out any work on the engine coolant system if you are not familiar with the requisite procedures, or if you do not have access to the correct tools, operating equipment and fluids → ⚠️! In this case, all activities must be carried out by a qualified workshop. Volkswagen recommends using a Volkswagen Dealership for this purpose.

Serious injuries can be caused if work is carried out incorrectly.

⚠️ WARNING

Engine coolant is toxic!

- Engine coolant must only be kept in sealed original containers in a safe place.
- Never store engine coolant in empty food containers, bottles or any other non-original containers as people finding these containers may then drink the engine coolant.
- The engine coolant must be stored out of the reach of children.
- Please note that the amount of correct coolant additive used must be sufficient for the lowest ambient temperature that you expect the vehicle to be exposed to.
- Coolant can freeze at extremely cold outside temperatures, causing the vehicle to break down. In this case, the internal vehicle heating will also no longer function, which may lower the body temperature of vehicle occupants with inadequate winter clothing.
- Prolonged exposure to cold and loss of body heat are hazardous factors to human health.

🌿 Under no circumstance may old engine coolant be reused. Observe specific disposal regulations for this product. ▶

 Volkswagen recommends changing or refilling the engine coolant and its additives at a Volkswagen Dealership, which has proper fluid disposal procedures. Never dispose of used fluids in locations such as gardens, woods, sewerage systems, on streets and roads, or in rivers and waterways.

Engine coolant specifications

 Please refer to  at the start of the chapter on page 234.

The engine cooling system is factory supplied with a mixture of **distilled water** and 40% G 12evo (TL-VW 774 L) engine coolant additive.

This mixture provides the necessary antifreeze of up to -25°C (-13°F) and protects the alloy parts of the cooling system against corrosion. The mixture also prevents scaling and raises the boiling point of the coolant.

In order to protect the coolant system, the proportion of coolant additive must *always* be at least 40%, even if antifreeze is not required in warm weather and warm climates.

If greater antifreeze is required in very cold climates, the proportion of antifreeze additive can be increased. However, the percentage of coolant additive must not exceed 60%, as this would reduce the antifreeze and the cooling effect.

When topping up the coolant, a mixture of **distilled water** and at least 40% coolant additive must be used in order to obtain the optimum corrosion protection → .

Mixing G 12evo with the engine coolants G 13 (TL-VW 774 J), G 12 plus-plus (TL-VW 774 G), G 12 plus (TL-VW 774 F) or G 12 (red colour) significantly compromises ant-corrosion properties and must be avoided.

Refer to Volkswagen Dealerships for more information on coolants approved by Volkswagen. That is why Volkswagen recommends having engine oil changes done by a Volkswagen dealership.

WARNING

Insufficient antifreeze in the coolant system can cause the engine to break down.

- Ensure that the correct engine coolant additive ratio is used based on the ambient temperature to which the vehicle is exposed.

NOTICE

 Never mix genuine coolant additives with other coolants that have not been approved by Volkswagen. Mixing with non-approved coolants could cause serious damage to the engine and cooling system.

- Brown liquid in the coolant expansion tank indicates that the engine coolant has been contaminated. The coolant must be changed as soon as possible if this is the case. Failure to observe this warning can result in serious faults and engine damages!

 Under no circumstance may old engine coolant be reused. Observe specific disposal regulations for this product.

 Volkswagen recommends changing or refilling the engine coolant and its additives at a Volkswagen Dealership, which has proper fluid disposal procedures. Never dispose of used fluids in locations such as gardens, woods, sewerage systems, on streets and roads, or in rivers and waterways. 

Checking coolant level and refilling coolant

 Please refer to  at the start of the chapter on page 234.

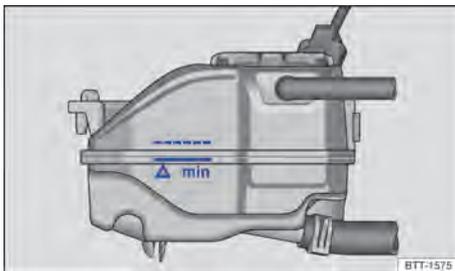


Fig. 193 On the engine compartment: marking on the coolant expansion tank. 



Fig. 194 On the engine compartment: engine coolant expansion tank cover.

The warning lamp for the engine coolant will light up if the engine coolant level is too low.

Preparations

- Park the vehicle in a flat and steady surface.
- Allow the engine to cool down → .
- Open the bonnet  → page 225.
- The coolant expansion tank has the  symbol on its cap → Fig. 194.

Checking the engine coolant level

- Check the coolant level at the side marking of the expansion tank when the engine is cold → Fig. 193.
- Refill the engine coolant if the liquid level is below the minimum marking (“min”). When the engine is warm, the coolant level may be slightly above the top end of the marked area.

Refilling engine coolant

- Always protect your hands and arms from hot coolant or steam by placing a suitable cloth on the cap of the coolant expansion tank.
- Carefully unscrew the cap →  anticlockwise.
- Refill only **new** coolant according to Volkswagen specifications (→ page 235) → .
- The coolant level must be between the marks on the expansion tank → Fig. 193. **Do not exceed the upper level marker when filling up** → .
- Firmly screw-in the cap clockwise.
- If in an emergency you do not have access to the coolant of the required specification, do not use any other coolant additive! Instead, top off with **distilled** →  only. Then add the correct proportion of coolant additive → page 235 to re-established as soon as possible the correct mix.

WARNING

Hot steam or engine coolant can cause severe burns.

- Never open the bonnet if steam or engine coolant can be seen or heard coming out of the engine compartment. Always wait until no escaping steam or coolant can be seen or heard.
- Always let the engine cool down completely before carefully opening the bonnet. Hot parts may cause burns when touched.
- Before opening the engine compartment cover once it has cooled down:
 - Apply the handbrake and move the selector lever to position **P** or the manual gear lever to the neutral position.
 - Turn the ignition off and remove the vehicle key from the ignition lock.
 - Always keep children away from the engine compartment and never leave the vehicle unattended.
- The engine cooling system is under pressure when the engine is hot. Never open the cap of the coolant expansion tank when the engine is hot. Coolant may spray out and cause severe burns and injuries.
 - Turn the cap slowly and very carefully anticlockwise while exerting some downwards pressure on the cap.
 - Always protect the face, hands and arms from hot coolant or steam with a large, thick cloth.
- When refilling, do not spill any service fluids on engine components or on the exhaust system. Spilt service fluids may start fires. In certain circumstances, the ethylene glycol in the engine can catch fire.

NOTICE

- Do not exceed the upper level marker when filling up with engine coolant → Fig. 193. Otherwise the excess coolant will be pressed out of the cooling system when the engine is hot and could cause damage.
- If a large amount of coolant has been lost, do not refill the coolant until the engine has *completely cooled*. Substantial coolant loss is an indication of leaks in the engine cooling system. The engine cooling system must be checked by a Volkswagen Dealership. Failure to do so can result in engine damage! ▶

- When refilling operating fluids, please ensure that the correct container is filled. The use of incorrect operating fluids could result in serious malfunctions and engine damage!

Brake fluid



Fig. 195 On the engine compartment: brake fluid reservoir cap.

Brake fluid will gradually absorb water from the surrounding air. The brake system will be damaged if there is too much water in the brake fluid. The boiling point of the brake fluid is also considerably reduced by the water content. Heavy use of the brakes may cause a vapour lock in the brake system if the water content is too high. Vapour locks reduce levels of braking power, considerably increase braking distance and can even cause the brake system to fail completely. Your own safety and that of other road users depends on having a brake system that functions properly at all times → ⚠.

Brake fluid specification

Volkswagen has developed a brake fluid optimised for the brake system in the vehicle. To ensure optimal operation of the brake system, Volkswagen recommends the use of **DOT 4** standard brake fluid → Fig. 195. Additionally, we recommend using original Volkswagen brake fluid.

Before using a particular brake fluid, check that the specifications printed on the container correspond to the vehicle requirements.

Suitable brake fluids may be acquired at a Volkswagen Dealership.

Brake fluid level

⚠ Brake fluid level is too low. **STOP** Stop driving! Check brake fluid level.

The brake fluid level must always be between the MIN and MAX marking on the brake fluid container or above the MIN marking → ⚠.

The brake fluid level cannot be checked accurately in all models, since engine components conceal the brake fluid container. When the brake fluid level cannot be accurately read, please seek a Volkswagen dealership or expert technical assistance.

The brake fluid level drops slightly when the vehicle is being used as the brake pads wear and the brakes are automatically adjusted.

Changing brake fluid

The brake fluid must be changed by a qualified workshop. Volkswagen recommends using a Volkswagen Dealership for this purpose. Only brake fluid that conforms with the required specification should be refilled.

⚠ WARNING

Brake failure or reduced braking effect can be caused by the brake fluid level being too low or by brake fluid that is too old or unsuitable.

- The brake system and brake fluid level must be checked regularly.
- Renew the brake fluid regularly.
- Heavy use of the brakes may cause a vapour lock if the brake fluid is left in the system for too long. Vapour locks reduce levels of braking power, considerably increase braking distance and can even cause the brake system to fail completely.
- Please ensure that the correct brake fluid is used. Only use brake fluid compliant with the DOT 4 standard. Any other brake fluid or a low-quality one can affect the functioning of the brakes and reduce their effectiveness. Do not use the brake fluid if the DOT 4 standard is not indicated in the fluid package.
- The refilled brake fluid must be new.

⚠ WARNING

Brake fluid is toxic.

- In order to reduce the risk of poisoning, never use bottles or other containers to store brake fluid. These containers could encourage other people to drink out of them, even if they are labelled otherwise.
- Brake fluid must always be stored in its original sealed container and kept out of the reach of children.

NOTICE

Spilt or leaked brake fluid may damage the vehicle paintwork, plastic parts, and tyres. Immediately clean spilt or leaked brake fluid over the vehicle's paintwork or other vehicle parts.

- Never mix different types of brake fluids.
- Clean the cover before removing it and placing it back in the reservoir.

 Brake fluid can pollute the environment. Collect and dispose of used fluids properly.

 Replacing brake fluids requires special procedures, equipment and knowledge, in addition to specific environmental standards. Therefore, disposing the brake fluid and its respective package as common trash is prohibited. Applicable laws establish specific disposal procedures for these cases. For your safety and convenience, Volkswagen recommends replacing the brake fluid at Volkswagen Dealerships. ◀

Vehicle battery

Introduction

The vehicle battery is a component of the electrical system in the vehicle.

Never carry out any work on the electrical system if you are not familiar with the necessary procedures and the general safety requirements and only unsuitable tools are available → ! In this case, all activities must be carried out by a qualified workshop. Volkswagen recommends using a Volkswagen Dealership for this purpose. Serious injuries can be caused if work is carried out incorrectly.

Vehicle battery installation location

The vehicle battery is located in the engine compartment.

Meaning of warnings on the vehicle battery

-  Always wear eye protection!
-  Electrolyte is very corrosive and caustic. Always wear protective gloves and eye protection!
-  Fires, sparks, smoke, and naked lights are prohibited!
-  A highly explosive mixture of gases is given off when the vehicle battery is charging!
-  Always keep children away from acid and the vehicle battery!

WARNING

Works on the vehicle battery and the electrical system can cause severe chemical burns, fire and electric shocks. Always read the following warnings and safety information before carrying out any kind of work:

- Switch off the ignition and all electrical consumers before carrying out any work on the vehicle battery and also disconnect the negative cable from the vehicle battery.
- Children should always be kept away from electrolyte and the vehicle battery.
- Always wear eye protection.
- Electrolyte is very aggressive. It can burn the skin and can cause blindness. When working with the battery, ensure that your hands, arms and face in particular are protected from acid spillages.
- Never open a vehicle battery.
- Do not smoke and never work near naked flames or sparks.
- When handling cables and electrical equipment, avoid generating sparks and electrostatic charge.
- Never short circuit the battery poles.
- Never use a damaged vehicle battery. It can explode. A damaged vehicle battery must be replaced as soon as possible.
- A damaged or frozen vehicle battery must be replaced immediately. A discharged vehicle battery can even freeze at temperatures of around 0° C (+32° F). ▶

- Ensure there is no one inside the vehicle while replacing the battery. In case of electrical failure, airbags may be accidentally engaged and cause severe or even fatal injuries to vehicle occupants.

NOTICE

- Never disconnect the vehicle battery with the ignition switched on or the engine running, and never connect it to another battery; otherwise the electrical system and electronic components may be damaged.
- Do not allow direct sunlight onto the vehicle battery for extended periods, since the UV rays could damage the battery housing.
- If the vehicle is parked for extended periods, ensure the vehicle is not parked in open spaces in order to protect the vehicle battery from "freezing" and being damaged.

 Never install damaged or improperly sealed batteries. Dispose of batteries according to environment protection standards → page 240, *Charging, replacing, disconnecting and connecting the vehicle battery.*

 After starting the engine with a fully discharged or replaced battery, system settings (such as time, date, convenience settings and programs) may have been deprogrammed or deleted. Check and adjust settings after the vehicle battery is sufficiently charged.

Checking the electrolyte level of the vehicle battery

 Please refer to  and  at the start of the chapter on page 238.



Fig. 196 On the engine compartment: example of display position on the upper side of the vehicle battery.

The electrolyte level of high-mileage batteries, in hot countries and of older vehicle batteries should be checked regularly. The vehicle battery is otherwise maintenance-free.

Preparations

- Preparation for working in the engine compartment → page 225
- Open the bonnet  → page 227.

Checking the electrolyte level

To access the round visor it is necessary to remove the fuse box support from the battery. Volkswagen recommends having the battery checked at a Volkswagen Dealership or qualified workshop.

- Ensure that sufficient light is available in order to see the colours clearly. Never use naked flames or glowing items as a light source.
- The round display → **Fig. 196** on the top side of the vehicle battery changes its colour according to the electrolyte level.
- Tap lightly on the display to eliminate air bubbles that may affect the colour.

Light yellow or without colour The electrolyte level of the battery is too low. The vehicle battery should be checked and replaced by a Volkswagen Dealership or qualified workshop.

Black The electrolyte level of the battery is in order.

Eventual different colours are destined to battery diagnosis at a Volkswagen Dealership or qualified workshop.

! WARNING

Handling the vehicle battery may cause chemical burns, explosions or severe electrical shocks.

- Always wear protective gloves and eye protection.
- Electrolyte is very aggressive. It can burn the skin and can cause blindness. When working with the battery, ensure that your hands, arms and face in particular are protected from acid spillages.
- Never tip the vehicle battery. Electrolyte might leak from the vents and cause chemical burns.
- Never open a vehicle battery.
- In case of spilled electrolyte on the skin or eyes, wash the affected area immediately with cold water for a few minutes. Then seek medical assistance.
- In case of electrolyte ingestion, seek medical assistance immediately.

Charging, replacing, disconnecting and connecting the vehicle battery

📖 Please refer to ⚠️ and ⓘ at the start of the chapter on page 238.

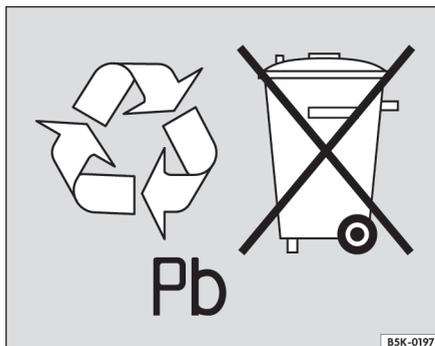


Fig. 197 Batteries contain toxic substances and must be recycled. Therefore, batteries may not be disposed in common trash; they must be returned to the reseller after replacement.

Charging the battery

The vehicle battery should be charged by a qualified workshop, as the technology used in factory-fitted batteries requires voltage-limited charging → ⚠️. Volkswagen recommends using a Volkswagen Dealership for this purpose.

Replacing the battery

◀ The battery has been developed to suit the conditions of its location and has special safety features. If a vehicle battery has to be replaced, discuss the electric compatibility, appropriate load capacity (A/h) for the vehicle, size and necessary servicing, output and safety requirements for the new vehicle battery with a Volkswagen Dealership before purchasing. Volkswagen recommends changing the vehicle battery in a Volkswagen Dealership.

Disconnecting the battery

Please note the following points if the vehicle battery has to be disconnected from the electrical system in the vehicle: ▶

- Switch off the ignition and all electrical consumers.
- The vehicle must be unlocked before disconnecting the battery as the alarm will otherwise be triggered.
- First disconnect the negative cable and then the positive cable → .

If the vehicle is stationary for a long period of time, disconnect the negative battery cable. Otherwise, the battery could be discharged by the current consumers in the vehicle, preventing the engine from starting.

Connecting the battery

- Switch off all electrical consumers and the ignition before reconnecting the vehicle battery.
- First connect the positive cable and then the negative cable → .

In case of issues during start-up in low gears, switch the ignition on for 30 seconds and then switch it off. Then, switch the engine on.

Various indicator lamps may light up after the vehicle battery has been connected and the ignition is switched on. Such lamps go out after a few seconds. If the indicator lamps remain lit up, the vehicle should be checked by a Volkswagen Dealership.

If the vehicle battery was disconnected for long periods, the system may not be able to calculate or correctly display the time when the next service is due → page 14. Observe the maximum permissible service intervals in the → page 260.

Vehicles with Keyless Access: if, after connecting the battery the ignition cannot be turned on, unlock and lock the vehicle from outside. Then try to turn the ignition on again. Case the ignition can still not be turned on, contact a Volkswagen dealership.

Automatic consumer deactivation

Through a smart electric management system, in case of high battery demand, different measures are adopted to prevent the battery from being discharged:

- Slow-gear rotation is increased in order for the alternator to provide more current.
- If necessary, some power consumers are limited or deactivated completely, in case of emergency.
- During engine start-up, the 12 V and lighter voltage supply may be temporarily interrupted.

The electric management system does not always prevent the battery from being discharged. This may occur if the ignition remains switched on while the engine is turned off for extended periods, or if the indicator light remains on for extended periods, while the vehicle is parked.

What can cause the vehicle battery to discharge?

- Long periods at a standstill in which the engine is not running, especially if the ignition is switched on.
- Use of electrical consumers when the engine is switched off.

WARNING

Incorrect attachment of the battery and the use of incorrect vehicle batteries can cause short circuits, fire and serious injuries.

- Always use maintenance-free and leak proof batteries which have the same properties, specifications and dimensions as the factory-fitted vehicle battery.
- Ensure there is no one inside the vehicle while replacing the battery. In case of electrical failure, airbags may be accidentally engaged and cause severe or even fatal injuries to vehicle occupants.

WARNING

A highly explosive mixture of gases is given off when the vehicle battery is charging!

- Vehicle batteries should only be charged in well-ventilated spaces.
- Never charge a frozen or defrosted vehicle battery. A discharged vehicle battery can even freeze at temperatures of around 0° C (+32° F).
- A vehicle battery must be replaced if it has been frozen.
- Incorrectly connected cables can cause a short circuit. First connect the positive cable and then the negative cable.

NOTICE

- Only recode the radio if the battery is reconnected and the radio is switched on before the ignition. Please refer to a qualified Volkswagen Dealership to recode the radio system.
- Never disconnect or connect the vehicle battery with the ignition switched on or the engine running, and never connect it to another battery; otherwise the electrical system and electronic components may be damaged.
- Never connect equipment which generates electricity, such as solar panels or battery charging units for charging the vehicle battery, to the 12-volt socket or to the cigarette lighter. This can damage the vehicle electrical system.

 Batteries may contain toxic substances such as sulphuric acid and lead. This product cannot be disposed / discarded along with common trash. There are specific legal requirements regarding the disposal / discarding of used batteries. For your safety and convenience, Volkswagen recommends replacing vehicle batteries at a Volkswagen Dealership or qualified workshop.

 The acid solution and lead contained in the battery could contaminate the ground and waters if disposed of incorrectly. Consumption of lead-contaminated waters may cause high blood pressure, several gastrointestinal disorders and anaemia (weakness and drowsiness).

Troubleshooting

 Please refer to  and  at the start of the chapter on page 238.

Vehicle battery

Central warning lamp

and  Fault in the alternator. The vehicle battery is not be charged by the alternator.

The vehicle battery will not be charged by the alternator while the vehicle is in motion.

- Switch off unnecessary electrical consumers.
- Go to a Volkswagen Dealership or qualified workshop.
- Have the electric system checked.

For vehicles with Start-Stop system, the Start-Stop system cannot start the engine → page 102.

Central warning lamp

and  Low battery.

The vehicle battery is charged by the alternator while driving however the charge level is not sufficient

- Charge the battery by driving around for a longer period of time.

For vehicles with Start-Stop system, the Start-Stop system cannot start the engine → page 102.

 Replace the battery.

The vehicle battery is not in good condition.

- Go to a Volkswagen Dealership or qualified workshop.

For vehicles with Start-Stop system, the Start-Stop system cannot start the engine → page 102.

When switching the ignition on, certain warning and indicator lamps flash to check functions. Such lamps go out after a few seconds.

WARNING

Failure to observe the warning lamps and text messages could lead to your vehicle breaking down in traffic, and to accidents and serious injuries.

- Never ignore any warning lamps or text messages that appear.
- Stop the vehicle as soon as possible and when safe to do so.

NOTICE

Failure to observe the illuminated indicator lamps could lead to vehicle damages.

Wheels and tyres

Tyre monitoring system

Introduction

The tyre monitoring system warns the driver when tyre pressure is too low.

Depending on the vehicle version, the tyre monitoring system may not be available.

WARNING

The intelligent technology shipped with the tyre monitoring systems cannot go beyond the limits imposed by physics and will only operate within the limitations of the system. Inadequate use of the wheels and tyres may cause a sudden loss of tyre pressure, displacement of the treads of the tyres and even their blowing up.

- Check tyre pressures regularly and always keep to the specified tyre pressure value → page 248. When the tyre pressure is very low, the tyre can become so hot that the tyre tread may come loose and the tyre blow up.
- Check and correct the tyre pressures always according to the prescribed values on the sticker → page 248.
- Check the tyre pressures regularly on cold tyres. If necessary, calibrate the tyres mounted on the vehicle when they are cold according to the indicated values on the sticker → page 248.
- Check the tyres regularly, looking for wear and tear signs.
- Never exceed the top speed and load capacity permitted for the fitted tyres.



A too low tyre pressure increases fuel consumption and tyre wear.



When driving for the first time with new tyres at high speed, they may expand somewhat and so a single tyre pressure warning may be issued.



Old tyres should only be replaced by tyres that have been approved by Volkswagen for the vehicle type.

Do not rely only on the tyre monitoring system. Regularly check the tyres to ensure that their pressures are correct and to see whether there are signs of damage, such as holes, cuts, cracks or bubbles. Remove foreign bodies from the tread of the tyre before they penetrate the tyre interior.

Tyre Pressure Loss Indicator

Please refer to  at the start of the chapter on page 243.

Operation instructions

The tyre pressure loss indicator compares, assisted by the ABS sensors, the speed and, consequently the rolling circumference of each tyre, among other things.

The rolling circumference of the tyre can change:

- When the tyre pressure has been changed.
- When the tyre pressure is very low.
- When the tyre has structural damages.
- When the vehicle is loaded on only one side.
- Whether an emergency wheel is mounted.
- Whether one wheel per axle has been changed.

The tyre pressure loss indicator (⚠) can be delayed or display nothing under given conditions such as, for example, when the driving style is very sporty, on snow covered roads or on unpaved roads,

Setting the tyre pressure loss indicator

After a tyre pressure change or after changing one or more wheels, the tyre pressure loss indicator must be reset again. This is also valid after exchanging the wheels, for example the front wheels with the rear wheels.

To reset the system the saved values must first be reset.

- Switch on the ignition.
- Depending on the vehicle version and the radio version, tap the selection surface .
- Touch the  function button.
- Touch the  function button.

- Touch the **Configure** function button.
- If the 4 tyre pressures correspond to the prescribed values, touch the **Confirm** function button to save the tyre pressures.

OR

- Switch on the ignition.
- *According to the version of the vehicle and of the radio*, press the **CAR** button on the radio system → page 26.
- Open the menu **Vehicle settings** on the radio system.
- Touch the **Tyres** function button.
- Touch the **SET** function button.
- If the 4 tyre pressures correspond to the prescribed values, touch the **Confirm** function button to save the tyre pressures.

After a longer driving period and at different speeds, the system resets the new values automatically and monitors them.

The tyre pressure loss indicator must be reprogrammed again under the following circumstances:

- When the tyre pressures have been adjusted.
- When one or more wheels have been exchanged.
- When the wheel positions have been changed, for example, the front wheels to the rear → page 246.

 The tyre pressure loss indicator does not work when the ESC or the ABS are damaged → page 144.

 After a low tyre pressure warning turn the ignition off and on again. Only then can the tyre pressure loss indicator be programmed again.

Tyre pressure loss indicator troubleshooting

 Please refer to  at the start of the chapter on page 243.

 on

The pressure of one or more tyres went down or the tyre suffered a structural damage.

-  **Stop driving!**
- Check all the tyre pressures and adjust → page 248.
- Replace the damaged tyres.
- Resetting the tyre pressure loss indicator again → page 243.
- Seek assistance from a Volkswagen Dealership if necessary.

 **flashes for about one minute and then remains permanently lit**

System damaged.

-  **Stop driving!**
- Turn the ignition off and on again.
- Resetting the tyre pressure loss indicator again → page 243.
- Seek assistance from a Volkswagen Dealership if necessary.

WARNING

Different tyre pressures or very low tyre pressures may result in collapsing tyres, loss of control over the vehicle, accidents, severe injuries and loss of life.

- If the indicator lamp (L) lights up, stop immediately and check all tyres → page 248.
- Different tyre pressures or very low tyre pressures may increase tyre wear, deteriorate stability and increase braking distance.
- Different tyre pressures or very low tyre pressures may result in a sudden collapse of the tyre, causing the tyre to blow up and the loss of control over the vehicle.
- The driver is responsible for the correct pressure in all the tyres of the vehicle. The recommended tyre pressure is always available on a sticker → page 248.
- The tyre monitoring system can only fulfil its mission when all tyres have the correct pressure when cold.

- Using incorrect tyre pressure values may cause accidents and damages to the tyres. All tyres must always have their tyre pressure adjusted to the carried load condition → page 248.
- Prior each trip, always calibrate the tyres to the correct tyre pressure → page 248.
- When travelling with very low tyre pressure, the tyres necessarily undergo more deformations. This way the tyres may get so hot that the tread may come loose, the tyres may blow up and loss of control over the vehicle may occur.
- High speeds and overload may heat a tyre in such a way that the tyre may blow-up and lead to loss of control over the vehicle.
- If the tyre pressure is too low or too high, the tyres will wear prematurely and the vehicle will not handle well.
- If the tyre is not “punctured” and is not necessary to change the wheel immediately, drive at low speed to the nearest Volkswagen dealership, to check and correct the tyre pressures → page 248.
- Seek assistance from a Volkswagen Dealership if necessary.

WARNING

Failure to take notice and heed activated warning lamps and text messages could cause the vehicle to stop in middle of traffic, severe accidents and injuries.

- Never ignore the warning lamps and the text messages.
- Stop the vehicle as soon as possible and when safe to do so.

NOTICE

Failure to observe the illuminated indicator lamps could lead to vehicle damages.

 With the ignition turned on, if a low tyre pressure is detected, the indicator lamp lights up (L). In addition, an acoustic warning sounds and a text message may be exhibited.

 When a damage to the system is detected with the ignition turned on, the yellow (L) indicator lamp flashes for a while and then stays permanently lit. In addition a text message may be exhibited.

 A long drive over unpaved roads or a sportive driving style may temporarily disable the tyre pressure loss indicator. The indicator lamp displays the malfunction, but goes off, however, when the road conditions or driving style change.

Important information on wheels and tyres

Introduction

Tyres are the most used and most underestimated parts of a vehicle. Tyres are very important as the narrow tyre surfaces are the only contact between the vehicle and the road.

The service life of tyres is dependent on tyre pressure, driving style, handling, and fitting.

Volkswagen recommends that work on tyres and wheels is carried out by a qualified workshop. They are familiar with the procedure and have the necessary special tools and spare parts as well as the facilities for proper disposal of old tyres. Volkswagen recommends using a Volkswagen Dealership for this purpose.

WARNING

Worn or damaged tyres cannot provide full levels of vehicle control and braking power.

- Incorrect handling of wheels and tyres can reduce vehicle safety and cause accidents and severe injuries.
- All 4 wheels must be fitted with radial tyres of the same type, size (rolling circumference) and the same tread pattern.
- New tyres will have to be run in, as they will initially have reduced grip and braking effect. Drive particularly carefully for the first 600 km in order to prevent accidents and severe injuries.
- At high and continuous speed, tyres with low pressure are excessively heated, which could cause the treads from detaching or even exploding. Always maintain the recommended tyre pressure.

- Never drive with worn tyres or tyres that are damaged (cuts, cracks or blisters). Driving with tyres in this condition can result in blown tyres, accidents and severe injuries. Worn or damaged tyres must be replaced immediately.
- Never exceed the top speed and load permitted for the fitted tyres.
- The effectiveness of the driver assist systems and brake assist systems depends on the tyre grip.
- If you notice unusual vibrations or if the vehicle pulls to one side when driving, stop the car immediately and check the wheels and tyres for damage.
- Do not use wheels or tyres if you do not know their previous history. Used wheels and tyres could be damaged, even if the damage is not visible.
- Old tyres – even if never used – may lose pressure or burst, especially at high speeds, and thus cause accidents and severe injuries. Avoid using tyres that are more than six years old. If you have no alternative, drive slowly and with extra care at all times.

Handling wheels and tyres

📖 Please refer to ⚠️ at the start of the chapter on page 245.

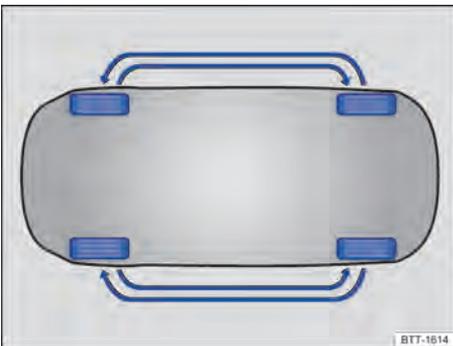


Fig. 198 Diagram showing how to swap wheels.

Tyres and wheel rims are an essential part of the vehicle's design. Tyres and wheels approved by Volkswagen are specifically matched to the characteristics of the vehicle and make a major contribution to good road holding and safe handling.

Rotating wheels

A regular rotation of the wheels as shown in the illustration → Fig. 198 is recommended to ensure a uniform level of wear for the tyres. All the tyres will then last for about the same time.

Volkswagen recommends to check the need to rotate the tyres at every servicing of the vehicle, and when there is such need, that alignment and balancing be performed.

Volkswagen recommends having the wheels rotated by a Volkswagen Dealership.

Avoiding damages to the tyres

- If you have to drive over a kerb or similar obstacle, drive slowly and at a right angle if possible.
- Inspect the tyres regularly for damage such as cuts, cracks or blisters.
- Remove foreign objects that are in the outer tyre tread and **have not penetrated the inner tyre** → page 250.
- Worn or damaged tyres must be replaced immediately → page 250.
- Regularly check the tyres for hidden damage → page 250.
- Never exceed the top speed and load permitted for the fitted tyres → page 252.
- Protect the wheels, including the spare wheel, from contact with corrosive substances, including oils, lubricants, fuel and brake fluid → ⚠️.
- Replace missing valve caps immediately.

Tyres older than 6 years

Tyres age through physical and chemical processes which can impair their function.

Volkswagen recommends replacing tyres older than 6 years with new tyres. This also applies to tyres, including the spare wheel, which appear to still be in good condition and on which the tread depth has not yet reached the minimum value provided by law → ⚠️ in *Introduction* on page 245.

The age of each tyre can be determined from the manufacturing date → page 252.

Storing tyres

Mark tyres before you remove them to ensure you will be able to mount them correctly when replacing (left, right, front, rear). When removed, ►

the wheels or tyres should be stored in a cool, dry and preferably dark place. **Do not** vertically store tyres mounted on the wheels.

Tyres without wheels should be protected against dirt and stored in proper covers standing on the tread.

New tyres

- Drive particularly carefully for the first 600 km with new tyres, as the tyres have to be *run in*. Tyres that have not been run in have reduced grip →  and braking effect → .
- All 4 wheels must be fitted with radial tyres of the same type, size (rolling circumference) and the same tread pattern.
- The tread depth of new tyres may differ from manufacturing and profile modelling characteristics according to the type and make of tyre and the tread pattern.

Replacing tyres

- Tyres should be replaced at least in pairs and not individually (e.g. both front tyres or both rear tyres together) → .
- Old tyres should only be replaced by new tyres that have been approved by Volkswagen for the vehicle type. Ensure that the tyres used are correct in respect of size, diameter, load-carrying capacity and maximum speed.
- Never use tyres with an effective size that is larger than Volkswagen-approved tyres. Larger tyres could rub against the body or other parts of the vehicle.

Reprogram the tire control indicator

After each change of a wheel or several wheels, the tyre pressure loss indicator must be reset again. This is also valid when rotating front versus rear wheels → page 243.

Vehicles with tyre Pressure Monitoring System

When replacing the factory installed wheels, ensure that the new wheels are equipped with sensors compatible with the tyre pressure monitoring system → page 243. To have the new wheels recognized by the system, the vehicle must be driven for some time at speeds above 25 km/h.

At the time of replacement and change of the sensors, Volkswagen always recommends the installation of a new set of valves or caps

More information on the Tyre Pressure Monitoring System.

WARNING

Corrosive liquids and other substances can cause visible and invisible damage to the tyres, which can cause the tyre to burst.

- Always keep chemicals, oils, lubricants, fuel, brake fluid and other corrosive substances away from the tyres.

WARNING

New tyres will have to be run in, as they will initially have reduced grip and braking effect.

- Drive particularly carefully for the first 600 km in order to prevent accidents and severe injuries.

WARNING

Wheels must have the proper necessary freedom of operation. If the wheels do not have the necessary freedom of operation, the tyre could rub on parts of the running gear, the vehicle body and the brake system. This can lead to a fault in the brake system and to tread separation and thus to a tyre bursting.

- The actual tyre size must not exceed the tyre dimensions of manufacturers approved by Volkswagen and must not rub on any vehicle body parts.

NOTICE

Avoid strong shocks and, if possible drive around the obstacles. The tyres may get deformed, especially by holes in the road and bumping into the sidewalk guides. That may cause damages to the tyres and wheel rims.

 Old tyres must be disposed of with specific technical knowledge and equipment, based on specific standards. Therefore, we recommend visiting a Volkswagen Dealership or qualified workshop for such purpose.

 Tyre disposal requires equipment and knowledge of applicable environment protection standards. Tyres cannot be disposed / discarded along with common trash. Applicable laws establish specific disposal procedures for these cases. For your safety and convenience, Volkswagen recommends replacing tyres at a Volkswagen Dealership. ▶

i Despite identical size details, the actual size of the various tyre makes may vary from these specified dimensions, or the tyre contours may vary considerably.

i Volkswagen-approved tyres are guaranteed to have the dimensions that are suitable for the vehicle. The salesperson will have to provide a certificate from the tyre manufacturer for other tyre makes to prove that the tyre is also suitable for the vehicle. This certificate must be stored in a safe place within the vehicle.

- Manufacture date
- Country of origin
- Manufacturing number
- Raw material
- Part code

⚠ WARNING

The use of improper or damaged wheels can impair vehicle safety and cause accidents and severe injuries.

- Only use wheels which have been approved for the vehicle.
- Check the wheels regularly for damage and replace as necessary.

Wheels

📖 Please refer to ⚠ at the start of the chapter on page 245.

The design of the wheel bolts is matched to the wheels. If different wheels are fitted, the correct wheel bolts with the right length and properly shaped bolt heads must be used. This ensures that the wheels are fitted securely and that the brake system works properly → page 255.

For technical reasons, it is not generally possible to use the wheels from other vehicles. This can also apply to wheels of the same vehicle type.

Tyres and wheels approved by Volkswagen are specifically matched to the characteristics of the vehicle and make a major contribution to good road holding and safe handling.

Wheel bolts

Wheel bolts must always be tightened with the correct tightening torque → page 255.

Wheels with bolted-on trims

Wheels may have removable trims which are attached to the wheel with self-locking bolts. Damaged trims may only be repaired by a qualified workshop. Volkswagen recommends using a Volkswagen Dealership for this purpose.

Wheel identification

Due to legal requirements in some countries, the information on new wheels may contain some specific wheel features. The following wheel data may be available, depending on the country:

- Seal of conformity
- Rim size
- Manufacturer or brand name

Tyre pressure

📖 Please refer to ⚠ at the start of the chapter on page 245.

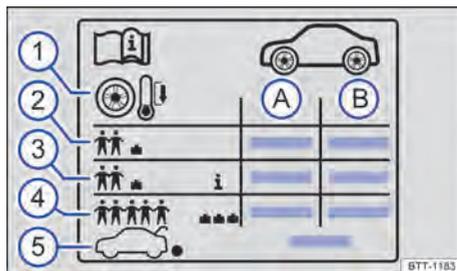


Fig. 199 Sticker with the tyre pressures.



Fig. 200 On the inner side of the fuel tank flap: tyre pressure label.

Indications on the tyre pressure sticker
→ Fig. 199:

- Ⓐ Tyre pressures for the front axle tyres.
- Ⓑ Tyre pressures for the rear axle tyres.

- ① Guideline: regularly check the pressure on the cold tyres.
- ② Tyre pressure under partial load.
- ③ *Depending on the vehicle's version:* Comfort tyre pressure under partial load.
- ④ Tyre pressure under full load.
- ⑤ Emergency wheel tyre pressure.

The sticker only indicates the correct tyre pressures for approved tyres and is located on the inside of the tank flap → Fig. 200.

According to the version of the vehicle the appearance of the sticker may vary. Additional tyre sizes may be contained → page 252.

If the tyre pressure is too low or too high, the tyres will wear prematurely and the vehicle will not handle well → ⚠. Proper tyre pressure is particularly important at **high speeds**. Incorrect tyre pressure causes premature wear and can cause tyres to burst.

Checking tyre pressure

The tyre pressure should only be checked if the tyres have not been driven for more than just a few kilometres at low speed in the last 3 three hours.

- Check tyre pressures regularly, at least every 15 days, and, additionally, prior any longer trip.
- Check the tyre pressures only on cold tyres. The indicated tyre pressures are valid only for **cold tyres**. Tyre pressure is always higher in warm tyres than it is in cold tyres. Therefore never release the air of hot tyres to adjust their pressure.
- Always adjust the tyre pressures to the vehicle load condition → Fig. 199 ③.
- After adjusting the tyre pressures, make sure to put the valve caps back on and to follow the instructions regards the tyre pressure monitoring system → page 243.
- Calibrate the tyres always to the pressures indicated on the sticker. Never exceed the maximum allowable pressure of the tyres as indicated on the tyre sidewalls.

⚠ WARNING

A tyre pressure that is too high or too low may cause the tyre to suddenly lose pressure or burst while the vehicle is in motion. This could lead to severe accidents and fatal injuries.

- Low tyre pressure may cause the tyres to heat to such an extent that the tread peels off and the tyre bursts.
- Fast speeds or overloading of the vehicle can cause overheating, sudden tyre damage including tyre bursts and ripping of the tread surface and thus to a loss of control of the vehicle.
- Check tyre pressures regularly, at least twice a month, and before every long journey.
- All tyres must have the correct tyre pressure to suit the vehicle load.
- Never reduce excess pressure when the tyres are warm.

! NOTICE

- When attaching the tyre pressure gauge, make sure that it does not touch the valve shaft. Otherwise, this could damage the tyre valve.
- Missing valve caps, or valve caps which are not suitable or not screwed on properly, may damage the tyre valve. Always use valve caps that comply with the factory-fitted valve cap specifications. Always screw on valve caps fully.

🌿 Under-inflated tyres will increase fuel consumption. ◀

Tread depth and wear indicators

📖 Please refer to ⚠ at the start of the chapter on page 245.

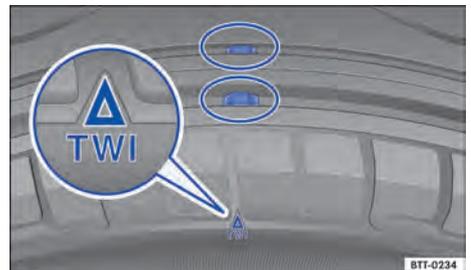


Fig. 201 Tyre profile: wear indicators.

Tread depth

In most countries, the minimum tread depth required by law is 1.6 mm (measured in the tread grooves next to the tread wear indicators). Observe any country-specific legal requirements. ▶

Difficult driving situations demand the deepest possible tread depth for the tyres and the same tread depth for the tyres on the front and rear axles → .

The tread depth of new tyres can vary according to type and manufacturer due to construction and tread design.

Observe the specific legal prescriptions of the country on the minimum tyre tread depth of winter tyres and regular tyres → page 254.

Tyre wear indicators

Tread wear indicators show if a tyre is worn down. The tyre must be replaced at the latest when the tread depth is just before the tread wear indicator.

The original tyres on your vehicle have 1.6 mm high tread wear indicators running across the tread → Fig. 201. These wear indicators are positioned at set intervals around the tyre. Markings on the tyre sidewall (for instance the letters "TWI" or other symbols indicate the positions of the tread wear indicators.

WARNING

Worn tyres threaten the safety of vehicle occupants and may cause loss of vehicle control and severe injuries.

- Tyres must be replaced at the latest when the tread is worn down to the tread wear indicators.
- Worn tyres have considerably less tread, particularly on wet roads, which can cause the vehicle to "glide" along the road surface (aquaplaning).
- Worn tyres reduce the possibility of controlling the vehicle well in normal and difficult driving situations and increase braking distance and the risk of sliding.

Tyre damage

 Please refer to  at the start of the chapter on page 245.

Damage to tyres and wheels is often not readily visible. Unusual **vibrations** or if the vehicle **pulls to one side**, one of the tyres might be damaged → .

- Reduce your speed immediately if you suspect that a wheel is damaged!
- Check the tyres and wheels for damages.
- If the tyre is damaged, do not drive on. Seek expert assistance.
- If there is no visible damage, drive slowly and cautiously to the closest Volkswagen Dealership or a qualified workshop in order to have the vehicle checked.

Foreign bodies in the tyre

- Leave the foreign body in the tyre if it has entered the inner tyre. However, foreign bodies that are stuck between the tyre tread blocks can be removed.
- Replaced the damaged wheel if necessary. Seek expert assistance if necessary. Volkswagen recommends using a Volkswagen Dealership for this purpose.
- Control and correct the pressure.

Tyre wear

Tyre wear is affected by several factors, such as:

- Driving style.
- Unbalanced wheels.
- Running gear setting.

Driving style – Fast cornering, heavy acceleration and hard braking all increase tyre wear. The running gear should be checked by a Volkswagen Dealership or qualified workshop if the tyres show excessive wear despite a normal driving style.

Unbalanced wheels – The wheels on new vehicles are balanced. However, various factors encountered in normal driving can cause them to become unbalanced, which results in steering vibration. Unbalanced wheels will affect levels of wear on the steering system and the suspension. In this case the wheels should be balanced again. New wheels must be balanced out prior mounting on the vehicle.

Running gear setting – incorrect wheel alignment causes excessive tyre wear, impairing the safety of the vehicle. The wheel alignment should be checked by a Volkswagen Dealership or qualified workshop if tyres show excessive wear. 

⚠ WARNING

Unusual vibrations or if the car pulls to one side while driving, one of the tyres might be damaged.

- Reduce speed immediately and park the vehicle while complying with traffic laws.
- Check the tyres and wheels for damages.
- Never drive on if the wheels or tyres are damaged. Seek expert assistance instead.
- If there is no visible damage, drive slowly and cautiously to the closest Volkswagen Dealership or a qualified workshop in order to have the vehicle checked.

Spare wheel

📖 Please refer to ⚠ at the start of the chapter on page 245.



Fig. 202 On the luggage compartment: spare wheel fastening handwheel.

Removing the spare wheel

- Open the boot lid → page 65.
- Lift the floor lining and remove it from the luggage compartment.
- Unscrew the handwheel in the middle of the spare wheel → Fig. 202 anticlockwise fully and remove the spare wheel.

Storing the removed wheel

- If necessary, place the vehicle toolkit back in the container in the luggage compartment.
- Place the removed wheel into the spare wheel well with the rim with the central hole in the rim positioned exactly above the stud.

- Turn the handwheel clockwise on the stud until the wheel is secured firmly.
- Reinsert the floor covering onto the top edge of the luggage compartment.
- Close the boot lid.

Case the temporary spare wheel is different from the installed wheels

If the spare wheel is different from the normal vehicle tyre version, for example, the former may be used only in case of emergency, temporarily and with due precautions → ⚠. Also see → page 256.

◀ Refit the normal road wheel as soon as possible.

Observe the driving notes:

- Do not drive faster than 80 km/h (50 mph)!
- Avoid full acceleration, sudden braking and fast driving through bends in the road!
- Tyre pressure must be checked as soon as possible after fitting the spare wheel → page 249.

The temporary spare wheel tyre pressure must be checked together with the tyre pressures of the regular wheels at least every 15 days → page 248.

⚠ WARNING

Incorrect use of the spare wheel or temporary spare wheel can lead to a loss of control of the vehicle, to collisions or other accidents and cause serious injuries.

- Never use a spare wheel or temporary spare wheel if it is damaged or worn down to the tread wear indicators.
- On some vehicles, the emergency spare wheel may be of a different size from the other wheels and tyres → page 256, *Temporary spare wheel of different size from the regular wheels*. Different sized emergency spare wheels are identified by an adhesive label and by the “80 km/h” inscription. This marking indicates the maximum rolling speed of the tyre.
- Never exceed 80 km/h (50 mph). Avoid full acceleration, sudden braking and making turns at high speeds!
- Replace the spare wheel with a regular wheel as soon as possible. The spare wheel is only intended for use in short periods of time.

- The temporary spare wheel must always be secured firmly with the wheel bolts supplied by the factory.
- Never overuse a spare wheel.

- After fitting the temporary spare wheel, the tyre pressure must be checked as soon as possible → page 248, *Tyre pressure*.

i If possible, firmly fasten the spare wheel or replaced wheel in the luggage compartment. ◀

Tyre markings and types

📖 Please refer to ⚠ at the start of the chapter on page 245.

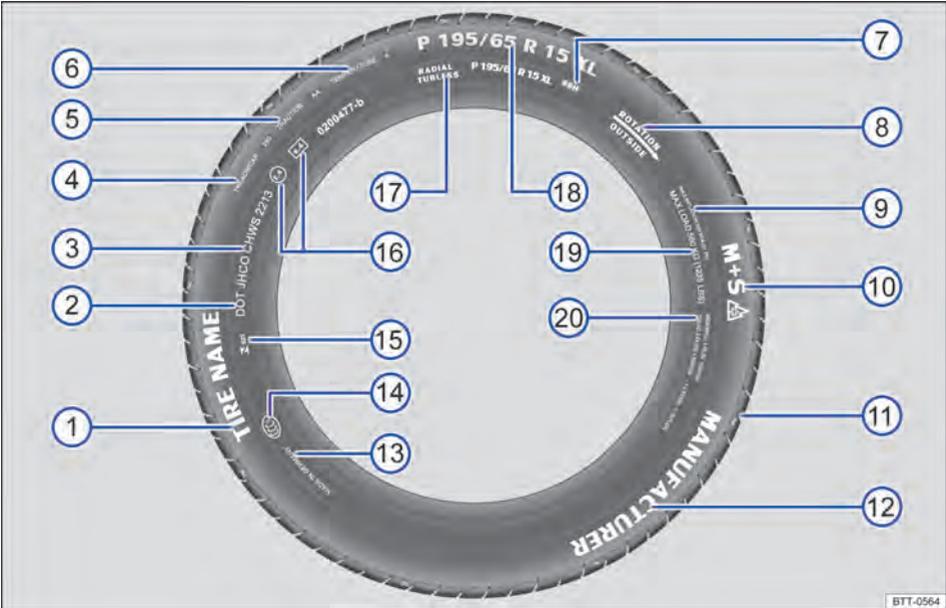


Fig. 203 International tyre lettering (example).

→ Fig. 203	Tyre lettering (example).	Definition						
①	Product name	Individual tyre lettering from the manufacturer.						
②	DOT	The tyre complies with the legal requirements of the Department of Transportation, responsible for tyre safety standards.						
③	JHCO CHWS 2213	<p>Tyre identification number (TIN^a) – in some cases only on the inner side of the wheel) and manufacturing date:</p> <table border="1" style="width: 100%;"> <tr> <td>JHCO</td> <td>Tyre manufacturing origin identification code</td> </tr> <tr> <td>CHWS</td> <td>and manufacturer information regarding tyre size and features.</td> </tr> <tr> <td>2213</td> <td>Manufacture date 22nd week of 2013.</td> </tr> </table>	JHCO	Tyre manufacturing origin identification code	CHWS	and manufacturer information regarding tyre size and features.	2213	Manufacture date 22nd week of 2013.
JHCO	Tyre manufacturing origin identification code							
CHWS	and manufacturer information regarding tyre size and features.							
2213	Manufacture date 22nd week of 2013.							

Information for the end user concerning comparative values for specified basic tyres (standardised test procedure) → page 274: ▶

→ Fig. 203 Tyre lettering (example).		Definition
④	TREADWEAR 280	Relative life expectancy for the tyre, based on a standard test. Tyres with a treadwear of 280 wear out 2.8 times slower than regular tyres with a treadwear of 100. Tyre performance varies depending on use conditions and may significantly vary from standard values due to driving behavior, maintenance, different road characteristics and weather conditions.
⑤	TRACTION AA	Wet braking response of the tyre (AA, A, B or C). This rating is measured in certified test tracks, under controlled conditions. Tyres marked with C have low traction power. The traction rating assigned to the tyre is based on levelled track tests and does not include acceleration, lateral curves, aquaplaning, or traction under maximum load.
⑥	TEMPERATURE A	Temperature stability of the tyre at higher test speeds (A, B or C). Tyres marked with A and B exceed legal requirements. The temperature test is based on tyres with the proper pressure and excludes excess pressure. Excessive speeds, improper or excess tyre pressure may heat or damage the tyres, either separately or in combination.
⑦	88 H	Load → page 254 and speed index → page 254.
⑧	Rolling direction and arrow OR: Outside	Identification of the tyre's rolling direction → page 254. Identification of the tyre's outer wall → page 254.
⑨	MAX INFLATION 350 KPA (51 psi / 3,51 bar)	US maximum air pressure limitation.
⑩	M+S or M/S or 	Denotes winter tyres (mud and snow tyres). Spiked tyres are identified with an E after the S.
⑪	TWI	Indicates the position of the Tread Wear Indicator → page 249.
⑫	<i>Brand name, logo</i>	Manufacturer.
⑬	Made in Germany	Manufacturing country.
⑭		Specific identification for China (China Compulsory Certification).
⑮	 023	Specific identification for Brazil.
⑯	E4 e4 0200477-b	Certification of conformity with international requirements with the number of the country that issued the approval. Tyres approved as per ECE regulations are marked with E, and tyres approved as per EG regulations are marked with e. This is followed by the multi-digit approval number.
⑰	RADIAL TUBELESS	Tubeless radial tyre.
⑱	P 195 / 65 R 15 XL	Size designation:
		P Identification for passenger vehicle.
		195 Tyre width from wall to wall in mm.
		65 Height/width ratio in %.
		R Tyre construction: radial.
		15 Wheel diameter in inches.
XL Heavy-duty tyres ("Reinforced").		

→ Fig. 203	Tyre lettering (example).	Definition
19	MAXIMUM LOAD 615 KG (1235 LBS)	US maximum load rating per wheel.
	SIDEWALL 1 PLY RAYON	Indications on the components of the inner structure of the tyre: 1 Rayon layer (artificial silk).
20	TREAD 4 PLIES 1 RAYON + 2 STEEL + 1 NYLON	Tread component indications: In this example, there are 4 layers under the tread: 1 layer of Rayon (synthetic silk), 2 layers of steel strap and 1 layer of nylon.

a) TIN is the tyre serial number.

Tyres with directional tread pattern

Tyres with directional tread pattern have been developed to roll in a single direction. An arrow on the tyre sidewall indicates the direction of rotation on tyres with directional tread. The direction of rotation must be followed. This is the only guarantee for optimum grip and helps to avoid aquaplaning, excessive noise and wear.

If, however, the tyre is fitted in the opposite direction to the tread pattern, you must take more care when driving as the tyre is now no longer being used according to its designation. This is particularly important on wet roads. Tyres must be replaced as quickly as possible or be fitted with the tread in the correct direction.

Tyre load capacity

The load capacity index indicates how many kilograms can be loaded onto an individual tyre (tyre load).

80	450 kg
85	515 kg
90	600 kg
91	615 kg
93	650 kg

95	690 kg
97	730 kg
99	775 kg
100	800 kg

Speed index

The speed index indicates the maximum permitted speed that may be driven when particular wheels are fitted.

P	max. 150 km/h
Q	max. 160 km/h
R	max. 170 km/h
S	max. 180 km/h
T	max. 190 km/h
U	max. 200 km/h
H	max. 210 km/h
V	max. 240 km/h
W	max. 270 km/h
Y	max. 300 km/h

Some tyre manufacturers use the code "ZR" for tyres with a highest permitted speed of over 240 km/h (149 mph). ◀

Winter tyres

📖 Please refer to ⚠ at the start of the chapter on page 245.

In winter road conditions winter tyres will considerably improve the car's handling. The design of summer tyres (width, rubber compound, tread pattern) gives less grip on ice and snow. Volkswagen urgently recommends the use of winter tyres or all-year tyres on all 4 wheels of

the vehicle, particularly if winter conditions are expected on the roads. Winter tyres will also improve the braking response of the vehicle and will help to reduce braking distances in winter weather. At temperatures below +7 °C (+45° F) Volkswagen recommends that winter tyres be fitted to the vehicle. ▶

lose a large degree of their effectiveness when the **tread** is worn down to a depth of 4 mm. Winter tyres also largely lose their effectiveness through **ageing** – regardless of the remaining tread depth.

The following applies when using winter tyres:

- Observe any country-specific legal requirements.
- Use winter tyres on all 4 wheels at the same time.
- Only use in winter road conditions.
- Only use the sizes of winter tyre that have been approved for the vehicle.
- Winter tyres must have the same type, size (rolling circumference) and the same tread pattern.
- Observe the maximum speed permitted by the speed index → .

Speed limit

Winter tyres have a speed limitation depending on the speed index → page 254.

If you use **V-rated winter tyres**, the speed limits and tyre pressure depend on the motorization. You must ask your Volkswagen Dealership about the highest permitted speed and required tyre pressure.

WARNING

Improved driving conditions due to the use of winter tyres during winter weather does not mean safety risks must not be prevented.

- Adapt your speed and driving style to suit visibility, weather, road and traffic conditions.
- Never exceed the maximum speed and load limits for fitted winter tyres.

 Reassemble summer tyres only after the winter season is over. At temperatures above +7° C (+45° F) vehicle handling is better with summer tyres fitted. They are quieter, do not wear so quickly and reduce fuel consumption.

 On vehicles with tyre pressure loss indicator, the system needs to be reset after each wheel change → page 243.

 Volkswagen Dealerships can provide details on permissible winter tyre sizes. 

Changing a wheel

Introduction

Only change the wheel yourself when the car is parked in a safe place, you are familiar with the necessary actions and safety procedures and you have access to all the correct tools! Seek expert assistance if this is not the case.

WARNING

Changing a wheel can be dangerous, especially when carried out at the side of a road. Please note the following points in order to reduce the risk of serious injuries:

- Stop the vehicle as soon as possible in a safe location. Park the vehicle at a safe distance from moving traffic in order to carry out the wheel change.
- All passengers, especially children, must be at a safe distance and away from your area of work during the wheel change.
- Switch on the hazard warning lights and set up the warning triangle to warn other road users.
- Make sure that the ground is flat and firm. If necessary use a large, strong board or similar support for the vehicle jack.
- Only change the wheel yourself if you feel confident carrying out the procedure. Seek expert assistance if this is not the case.
- Always use suitable and undamaged tools to change the wheel.
- Always switch off the engine, firmly apply the handbrake and, with an automatic gearbox move the selector lever to position **P** or engage a gear on a manual gearbox to reduce the risk of the vehicle moving.
- The wheel bolt tightening torque should be checked with a torque wrench immediately after changing a wheel.
- On vehicles with tyre pressure loss indicator, the system needs to be reset after each wheel change → page 243, *Tyre Pressure Loss Indicator*. 

Preparations for changing a wheel

📖 Please refer to ⚠️ at the start of the chapter on page 255.

Checklist

The following actions must always be carried out in the given order in preparation for changing the wheel → ⚠️:

1. In case of flat tyres, park the vehicle at a safest distance possible from the traffic flow, in a steady and even terrain.
2. Apply the handbrake → page 134.
3. Automatic gearbox: move the selector lever to position **P** → page 106.
4. Stop the engine and remove the key from the ignition lock → page 98.
5. Manual gearbox: select the gear → page 104.
6. Have all occupants get out of the vehicle and placed in a safe spot away from the traffic.
7. Place a wedge on the opposite wheel, using a rock or similar object.
8. While towing trailers: unhitch the trailer from the vehicle and park it properly.
9. While the luggage compartment is loaded: remove baggage items.
10. Remove the spare wheel and the vehicle toolkit from the luggage compartment.

⚠️ WARNING

Ignoring any of the points on this important safety checklist can lead to accidents and injuries.

- Always follow the instructions on the checklist and comply with applicable safety precautions.

Temporary spare wheel of different size from the regular wheels

📖 Please refer to ⚠️ at the start of the chapter on page 255.

On vehicles equipped with 16 and 17 inch wheel rims, the temporary spare wheel has a wheel rim of different dimensions from the regular wheel rims.

Apart from a different sized wheel rim, the vehicles equipped with light alloy wheels may have a temporary spare wheel of steel.

The temporary spare wheel must be used temporarily, replacing a 15-inch wheel, only for as long as necessary before having the regular wheel or tyre repaired → ⚠️.

During this period, mind the following precautions: after installing a temporary spare wheel of different dimensions, the tyre pressure must be checked and adjusted, if necessary. Check proper pressure values on the inside of the fuel tank cover. On vehicles with tyre pressure loss indicator, the system needs to be reset after each wheel change → page 243.

The different sized wheel must return as soon as possible to its initial condition, after the reinstallation of the regular wheel and tyre, repaired or replaced. Additionally, consider the maximum load capacity, specified in the tyre sidewall.

To reduce the chances of damages to the tyres and wheelrims of your vehicle:

- Avoid driving on roads with holes, depressions or bumps. The impacts suffered when running over obstacles such as these can damage your vehicle's tyres and wheel rims. If it is necessary to drive under such conditions, it is absolutely necessary to check the vehicle's tyres and wheel rims afterwards, or seek the assistance from a nearby Volkswagen dealership or specialized outfit.
- Perceiving any damage to the tyre it is necessary to replace it as soon as possible as there is a risk of the tyre blowing up and loss of control over the vehicle.

⚠️ WARNING

Incorrect use of the temporary spare wheel of different wheel rim dimensions for an extended period of time, or by permanent replacement of the 15, 16 and 17 inch wheel rims, may result in vehicle control loss, collisions or other accidents with risk of severe injuries.

- Never drive at speeds in excess of 80 km/h while using the different sized temporary spare wheel rim. Avoid sudden brakes or acceleration, as well as steep curves.
- Never use more than one different sized wheel rim at the same time.

Wheel bolts

📖 Please refer to ⚠ at the start of the chapter on page 255.



Fig. 204 Changing the wheel: loosen wheel bolts.

Only the spanner delivered with the vehicle should be used to loosen the wheel bolts.

Only loosen the wheel bolts by approximately one turn before raising the vehicle with the vehicle jack.

If the wheel bolt is very tight, you may be able to loosen it by pushing down the end of the spanner carefully with your foot. Hold on to the car for support and take care not to slip.

Loosening the wheel bolts

- Fit the box spanner over the wheel bolt as far as it will go → Fig. 204.
- Hold the end of the box spanner and turn the wheel bolt approximately *one* turn anticlockwise → ⚠.

Important information about the wheel bolts

The wheel bolts were specifically designed for the factory-fitted wheels. If different wheels are fitted, the correct wheel bolts with the right length and properly shaped bolt heads must be used. This ensures that the wheels are fitted securely and that the brake system works properly.

Tightening torque for the wheel bolts

Prescribed tightening torque for light alloy wheel rims and steel wheel rims:

- 120 Nm

If the wheel bolts are corroded and difficult to turn, they must be replaced and the wheel hub threads cleaned **before the tightening torque is checked**.

Never grease or lubricate the wheel bolts or the threads of the wheel hub. This could cause them to loosen while the vehicle is in motion, even if the required torque setting is used.

The tightening torque should be checked with a torque wrench immediately after changing a wheel.

⚠ WARNING

Incorrectly tightened wheel bolts can loosen while the vehicle is in motion and cause accidents, serious injury, and loss of control of the vehicle.

- Only use wheel bolts corresponding to the respective wheel.
- Never use different wheel bolts.
- The wheel bolts and threads of the wheel hubs must be clean, free from oil and grease, and turn easily.
- Always use the box spanner placed in the vehicle at the factory to loosen and tighten the wheel bolts.
- Only loosen the wheel bolts by approximately one turn before raising the vehicle with the vehicle jack.
- If the tightening torque of the wheel bolts is too low, the wheel bolts and wheels can loosen while the vehicle is in motion. The wheel bolts and threads can be damaged if the tightening torque is too high.

Lifting the vehicle with the jack

📖 Please refer to ⚠ at the start of the chapter on page 255.



Fig. 205 Jacking points

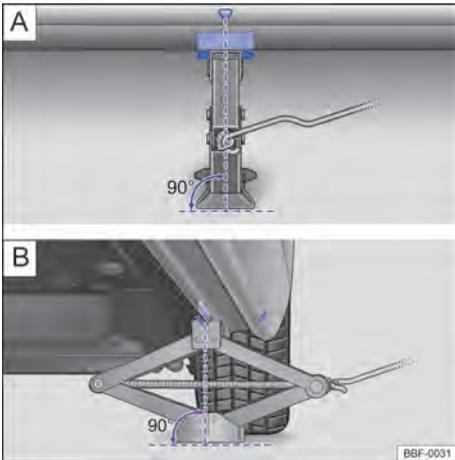


Fig. 206 Jacking points and vehicle jack at the rear left-hand side of the vehicle.

The jack may be applied only at the jacking points shown (markings on the body) → Fig. 205. Always use the jacking point closest to the wheel you are working on → ⚠.

Checklist

To ensure your own safety and the safety of your passengers, observe the following points in the order given → ⚠:

1. Find a flat and firm surface suitable for lifting the vehicle.
2. Turn the engine off, engage a gear → page 104, when manual gearbox or, move the selector lever to position **P** → page 106, when automatic gearbox, and apply the handbrake → page 134.
3. Ensure that all passengers leave the vehicle.
4. Place a wedge on the opposite wheel, using a rock or similar object.
5. While towing trailers: unhitch the trailer from the vehicle and park it properly.
6. Loosen the wheel bolts on the wheel that is being changed → page 257.
7. Find the jacking point under the vehicle → Fig. 205 closest to the wheel that is being changed.
8. Secure the manual crank into the jack housing.
9. Raise the vehicle jack until it just fits under the jacking point of the vehicle.

10. Ensure that the entire surface of the foot of the jack is resting securely on the ground and that the foot of the vehicle jack is positioned precisely below the jacking point → Fig. 206 **A** and **B**.
11. Align the jack and, at the same time, raise the vehicle jack claw until it engages with the cross piece under the vehicle → Fig. 206.
12. Crank the vehicle jack further until the wheel is just clear of the ground.

⚠ WARNING

Incorrect use of the vehicle jack can cause the vehicle to slip, which can lead to severe injuries. Please apply the following rules to reduce the risk of accidents:

- Only use jacks which have been approved by Volkswagen for the vehicle. Other vehicle jacks could slip out of position – this includes vehicle jacks supplied with other Volkswagen models.
- The ground must be flat and firm. Tilted or unstable surfaces can cause the vehicle to slide. If necessary use a large, strong board or similar support for the vehicle jack.
- On a hard, slippery surface (such as tiles) use a rubber mat or similar to prevent the vehicle jack from slipping.
- Fit the vehicle jack only at the points described. The vehicle jack claw must grip the vertical rib under the sill securely → Fig. 206.
- When towing a trailer, unhitch the trailer from the traction vehicle before changing the wheel.
- Never place any part of your body (e.g. arm or leg) underneath the vehicle if the latter is only supported by the vehicle jack.
- Ensure that all passengers leave the vehicle.
- If you have to work underneath the vehicle, use suitable stands to provide extra support.
- Never lift the vehicle while the engine is running or if the vehicle is parked over a slope surface.
- Never start the engine when the vehicle is raised on a vehicle jack. Engine vibrations can cause the vehicle to fall off the vehicle jack.

⚠ WARNING

Ignoring any of the points on this important safety checklist can lead to accidents and injuries.

- Always follow the instructions on the checklist and comply with applicable safety precautions.

⚠ WARNING

An incorrect torque or incorrectly handled wheel bolts can lead to a loss of control of the vehicle, cause accidents and serious injuries.

- Always keep all wheel bolts and threads in the wheel hubs clean and free from oil and grease. Wheel bolts must be easy to turn and be tightened to the specified torque.

Changing the wheel

📖 Please refer to ⚠ at the start of the chapter on page 255.



Fig. 207 Wheel replacement: wheel bolt removal sequence.

Removing the wheel

- Read the checklist → page 256.
- Loosen the wheel bolts → page 257.
- Lift the vehicle → page 257.
- Completely remove the loose wheel bolts (A) using the wheel wrench and place them on a clean surface.
- Remove the wheel.

Install spare wheel

If applicable, take note of the running direction of the tyre → page 243.

- Insert the spare wheel.
- *Gently* screw in the wheel bolts and tighten them.
- Lower the vehicle with the jack.
- Use the box spanner to tighten all the wheel bolts securely → ⚠. Do not tighten the bolts in clockwise or anticlockwise sequence. Tighten them in diagonal sequence.



Wheel bolts must be clean and able to turn freely. Never lubricate wheel bolts.



When changing wheels, if you notice that the bolts are corroded or worn, they must be replaced before checking the tightening torque.

After changing a wheel

📖 Please refer to ⚠ at the start of the chapter on page 255.

- Clean the tools as necessary and place them back in the luggage compartment → page 210.
- Stow the spare wheel or the removed wheel securely in the luggage compartment.
- The tightening torque of the wheel bolts should be checked immediately with a torque wrench
- The damaged wheel should be replaced as soon as possible.

⚠ WARNING

After changing the wheel, always ensure that the vehicle toolkit and spare wheel are properly secured in the luggage compartment.



On vehicles with tyre pressure loss indicator, the system needs to be reset after each wheel change → page 243.

Maintenance

Service

Maintenance services and digital maintenance and warranty

The **vehicle data label** on the back cover of this instruction manual confirms the **initial release or delivery date, the delivery inspection** and thus the start of the warranty coverage for your vehicle.

For some markets the digital Maintenance and warranty is not available. In this case your Volkswagen Dealership will be able to inform you about its service and documentation.

Digital electronic registration of maintenance services performed

Service vouchers will be stored in the central system memory by the Volkswagen Dealership or specialized company. Through this transparent service history documentation, performed vehicle maintenance work can be accessed at any time. Volkswagen recommends requesting, after each service performed, a printed proof of service containing data on maintenance work stored in the system.

With each new service, the previous proof of service is replaced by an updated printout.

Service

Digital Maintenance and warranty records the following information from your Volkswagen Dealership or specialist company:

- When a given service was performed.
- Whether a repair recommendation was given, as for example, whether the brake pads will have to be replaced soon.
- Which components or fluids have been renewed.
- When your next service call will be due.

WARNING

Insufficient or not performed maintenance and failure to observe the service intervals may cause vehicle stops, traffic accidents, and serious injuries.

- Have the maintenance work performed by an authorized Volkswagen Dealership or qualified workshop.

NOTICE

Volkswagen may not be held liable for damage to the vehicle due to insufficient service or missing parts.

 Regular vehicle maintenance services not only serve the purpose to maintain the value of the vehicle, but also contribute to operational and traffic safety. Servicing work should therefore always be carried out in accordance with the Volkswagen maintenance guidelines. 

First service

The servicing interval may be different according to the country.

Petrol engines

Service based on time or mileage

Oil Change Service

The service is carried out in accordance with the next servicing indicator, and according to whichever occurs first:

- after 1 year or every 10,000 km;
- after 1 year or every 15,000 km.

TOTALFLEX Engine

Service based on time or mileage

The service is carried out in accordance with the next servicing indicator, and according to whichever occurs first:

- after 1 year or every 10,000 km. 

Information on the terms of use

The indicated service intervals are established based on **normal driving conditions**.

In case of **adverse driving conditions**, some intermediary services are required between each of the service intervals indicated.

Adverse driving conditions include the following cases: 

- fuel with high sulphur content;
- frequent driving at low engine speeds with intense traffic, with extended periods operating at idling speed ("stop-and-go"; urban traffic),
- in short trajectories (below 8 km per day) or with the engine running below ideal temperatures;
- in urban routes with frequent stops;
- high ambient temperature associated to constant use of the air conditioning system
- frequent traffic in unpaved or dusty roads and highways.;
- predominant driving under environments with high levels of suspended particles (mining, cement, steelworks, marble, and saline factories, etc.),
- predominant operation towing trailers or transporting cargoes;
- vehicle operation to provide taxi services, school transportation, deliveries, special services (patrolling, escorting, ambulance, fire trucks, military use) and/or similar applications.

These conditions particularly affect the following parts:

- toothed belt;
- dust and pollen filters,
- air filter,
- engine oil.

Your Volkswagen Dealership will inform you of any eventual need to perform intermediary services based on your vehicle driving conditions.

The costs of Volkswagen services may vary according to the vehicle model and equipment version, as well as additional services and inspections eventually required. Your Volkswagen Dealership will inform you of all costs (labour and material) regarding Volkswagen maintenance services.

Service scopes

Depending on the vehicle model/version, some of the scope items may not be available and/or be applicable to the vehicle.

The service scopes include all the necessary **maintenance items** to keep your vehicle in safe condition for driving and the traffic (depending

on the conditions of use and the equipment of the vehicle such as for example, engine, transmission or fluids). The maintenance service work is split between *inspection items* and *maintenance items*. You can consult your Volkswagen Dealership for a detailed overview of the necessary activities .

Inspection items

Electric system

- Battery: check
- Horn: check
- Lighting (interior and exterior): check
- Service interval display: reset

Engine / Gearbox

- Poly V-belt: check
- Engine and engine compartment components (upper and lower parts): check
- Cooling system: check
- Exhaust system: check
- Power transmission and final drive system: check

Running gear

- Coil springs and elastic stops: check
- Protective joint hoods: check
- Electric power steering: check
- Swivel joints/track rods: check
- Brake fluid level: check
- Brake pads/discs: check
- Tyres: check
- Tyre pressure of all tyres: check
- Shock absorbers and brake system: check

Body

- Body: check for damages and corrosion
- Window wiper blades: check
- Windscreen: check
- Underside of the vehicle: check
- Window wiping and washing system: check
- Test drive: perform

Maintenance items

In addition to the inspection items (depending on the use and the vehicle's equipment, such as engine, power transmission or fluids), other maintenance items may have to be performed on your vehicle. These items must be looked after based on the *time* and/or *mileage*.

- Additives: change/fill up
- Toothed belt/toothed belt tensioning roller: check/ replace
- Poly V-belt: replace
- Air cleaner: replace
- Fuel filter *only for TOTALFLEX vehicles*: replace
- Brake fluid: replace
- Dust and pollen filter: replace
- Engine: replace filter/oil
- Spark plugs: replace

There may be changes to the service scope for technical reasons (continuous components development). Volkswagen Dealerships are always updated about innovations.

- Never use fuel, turpentine, engine oil, nail varnish remover or other volatile fluids to wash, clean or care for your vehicle. These substances are toxic and highly flammable.

WARNING

Incorrect care and cleaning of vehicle parts can impair the safety features of the vehicle and thus cause serious injuries.

- Vehicle parts must be cleaned according to the manufacturer's instructions.
- Only use approved or recommended cleaning products.

NOTICE

Cleaning agents that contain solvents attack the material and can cause damage.

NOTICE

Never attempt to remove dirt, mud or dust from a dry vehicle surface. Additionally, never use dry cloths or sponges in order to prevent risking the vehicle paint or windows. Dirt, mud and dust must be softened with water before they are removed.

 Environmentally-friendly care products should be used.

 Leftover car care products should not be disposed of with common waste. Read the manufacturer's instructions.

Vehicle conservation

Guidelines for the conservation of the vehicle

Regular and expert care helps to **maintain the value** of the vehicle. Proper maintenance may also be one of the requirements for the approval of warranty claims in the event of corrosion or paint defects.

Suitable care products are available from Volkswagen Dealerships.

WARNING

Car care products can be toxic and hazardous. Unsuitable care products and incorrect application of care products can cause accidents, severe injuries, burns or poisoning.

- Care products must be kept in its original sealed container.
- Read the manufacturer's instructions.
- Never store car care products in empty food containers, bottles or any other non-original containers as people finding these containers may not know that they contain care products.
- Keep children away from care products.
- The products may generate harmful fumes during use. Such products should therefore only be used outside or in well-ventilated spaces.

Washing of the vehicle

The longer substances such as insects, bird droppings, resinous tree sap, road dirt, industrial deposits, tar, soot or road salt and other corrosive materials remain on the vehicle, the more damage they do to the paintwork. High temperatures and strong sunlight further intensify the corrosive effect. The **underside** of the vehicle must also be cleaned thoroughly on a regular basis.

Car washes

Please observe the signs on the automatic car wash. Before using an automatic car wash, take the usual precautions, such as closing all windows and folding in the exterior mirrors, in order

to avoid vehicle damages. Inform the car wash operator if there are special parts on your vehicle such as spoilers, radio aerials → ⓘ.

The paint is so hard-wearing that the car can normally be washed without problems in an automatic car wash. However, the effect on the paint depends to a large extent on the design of the car wash. Volkswagen recommends the use of car washes without brushes.

To remove any wax residues from the windows and to prevent windscreen wipers from rubbing, please follow the below guidelines → page 264, *Cleaning windows and exterior mirrors*.

High pressure washing machine

Follow the instructions provided by the manufacturer when cleaning your vehicle using a high-pressure cleaner. This applies in particular to the **pressure** and **spraying distance** → ⚠.

Washing the vehicle with a high-pressure cleaner may cause water to enter the vehicle. Avoid using high-pressure cleaners at distances lower than 30 cm from the vehicle's surface. Using a high-pressure cleaner of over 8,000 kPa (80 bar) could damage or remove paintwork or adhesives.

Maintain sufficient distance to soft materials such as rubber hoses, insulation, and the park distance control sensors. Parking distance control sensors are located in the rear bumper → ⓘ.

Never use **concentrated jet nozzles** or **dirt blasters** → ⚠.

Washing the car by hand

When washing by hand, first soften the dirt with plenty of water and rinse off as well as possible.

Then clean the vehicle with a soft **sponge**, a **glove** or a **brush**, using only light pressure. Start with the roof and work from the top to the bottom. Use a **shampoo** for very persistent dirt only.

The sponge or glove should be wrung out thoroughly at regular intervals.

Clean the wheels, sill panels etc. last. Use a different sponge for this purpose.

Vehicle paintwork conservation

Waxing protects the paintwork. As soon as water no longer forms **visible drops** on the *clean* paintwork it is time to protect it again with a good **wax**.

Even when a **wax solution** is used regularly in the car wash, Volkswagen recommends protecting the paint with a coat of hard wax at least twice a year.

Polish the vehicle's paintwork

Polishing is only necessary if the paint has lost its shine, and the gloss cannot be brought back by applying wax.

The car must be waxed after polishing if the polish used does not contain wax compounds to seal the paint.

⚠ WARNING

Parts of the vehicle with sharp edges may cause injuries.

- Protect your hands and arms from cuts on sharp parts, for example when cleaning the underbody or the inside of the wheel housings.

⚠ WARNING

After the car has been washed, the braking effect could set in later than normal and extend the braking distance as the brake discs and brake pads will be wet, or iced up in winter.

- "Dry the brakes and eliminate ice" through careful braking manoeuvres. Proceed without putting other drivers at risk or failing to abide by legal requirements.

⚠ WARNING

Incorrect use of a high-pressure cleaner can cause visible and invisible long-term damage to tyres and other materials. This could lead to accidents and severe injuries.

- Maintain sufficient distance between the nozzle and the tyres.
- Never clean the tyres with concentrated jet nozzles ("dirt blasters"). Even at large spraying distances and short cleaning times, visible and invisible damage can occur to the tyre.

ⓘ NOTICE

- Water temperature should not be higher than +60 °C.
- Do not wash the vehicle in direct sunlight in order to avoid damage to the vehicle paintwork.

Cleaning and conserving the exterior of the vehicle

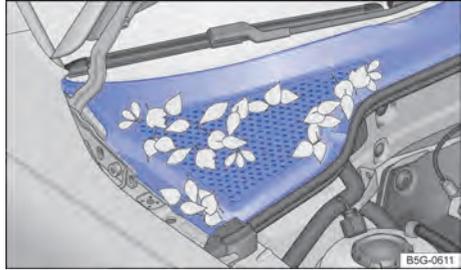


Fig. 208 Between the engine compartment and the windshield: plenum chamber (schematic representation).

Cleaning windows and exterior mirrors

Moisten the windows and exterior mirrors with standard alcohol-based glass cleaner.

Dry the glass surfaces with a clean chamois leather or a lint-free cloth. Chamois leathers which have been used on painted surfaces have grease residues and are therefore not suitable for use on glass surfaces.

Use window cleaner or a silicone remover to clean off rubber, oil, grease and silicone deposits → ①.

Remove wax residues

Car washes and care products could leave **wax deposits** on the glass surfaces. Wax residue can only be removed using a special cleaning product or cleaning cloths. Wax residues can affect the window wiper system's performance, in addition to causing irregular movement or excessive noises. Volkswagen recommends using a glass cleaning cloth to remove wax deposits from the windows and exterior mirrors each time the vehicle is washed.

A window cleaner specifically for removing wax will stop the blades rubbing if added to the window washer water. Dilute the cleaner as instructed. Grease removing cleaners will not remove wax deposits → ①.

Special cleaners, glass cleaners and glass cleaning cloths are available from Volkswagen Dealerships. ▶

- The parking distance control sensors in the bumpers must be clean and free of ice to guarantee correct function. When cleaning with pressure hoses and steam cleaners, the sensors should only be sprayed briefly, always maintaining a distance of over 30 cm.
- Never clean with hard sponges, rough kitchen sponges or similar products as these can damage the surface.
- Do not clean windows that are iced over or covered in snow with a high-pressure cleaner.
- Never clean the headlights with a dry cloth or sponge. Soapy water is the preferred choice.
- Vehicle washing under cold weather: if the vehicle is rinsed with a hose, do not direct the water into the lock cylinders or the gaps round the doors, boot, or bonnet. The locks and seals could freeze.

ⓘ NOTICE

Before using an **automatic washing system**, the following points must mandatorily be checked to prevent damages to the vehicle:

- Make sure that the gap between the guide rails in the car wash is sufficient to prevent damages in wheels and tyres!
- Check that the car wash is tall and wide enough for your vehicle.
- Fold in the exterior mirrors.
- In order to prevent damage to the paintwork on the engine compartment cover, fold the windscreen wipers back onto the windscreen after drying the wiper blades. Do not let them drop!
- Lock the boot lid to avoid unexpected opening in the automatic car wash.

ⓘ NOTICE

- In order to avoid damage, painted parts with a matt finish, plastic parts, headlight lenses and the tail lights should not be treated with polish or hard wax.
- Do not polish the paint if the vehicle is in a sandy or dusty environment or if it is dirty.

 The vehicle should only be washed in specially provided wash bays. This prevents toxic, oil, grease and fuel laden waste water from entering the sewage system. In some regions, washing vehicles anywhere else may be prohibited. ◀

Remove the snow

Use a small brush to remove snow from the windows and exterior mirrors.

Remove the ice

The best method for removing ice is to use a de-icer spray. If you use an ice scraper, **do not** move it to and from, but push it in one direction only. Moving the ice scraper backwards can cause dirt to scratch the window.

Clean chrome and aluminium parts

- Use a damp, clean, lint-free and soft cloth to clean the surfaces.
- For heavy soiling use a special **solvent-free** cleaning product.
- Polish the chrome and aluminium trim parts using a soft and dry cloth.

Cleaning steel wheels

Use an industrial cleaner to remove brake dust caught in the wheel. Steel wheels should therefore be cleaned regularly with a separate sponge.

Any damage to the paint on steel wheels should be touched up before the metal starts to rust.

Caring for and cleaning alloy wheels

Wash grit and brake dust from alloy wheels approximately **every 2 weeks**. Then use an acid-free detergent to clean the wheels. Volkswagen recommends applying a hard wax compound to the wheels approximately **every 3 months**.

If the brake dust is not removed regularly, the alloy wheel could be damaged.

Always use an acid-free detergent for alloy wheels. Car polish or other abrasive agents should not be used on the wheels.

If the protective coating is damaged (e.g. by stone impact) the damaged area should be repaired immediately.

Conserve the rubber seals

The rubber seals on the doors, windows etc. will seal better, remain flexible and last longer if they are treated at regular intervals with a suitable care product.

Use a soft cloth to remove dust and dirt from the rubber seals before applying the product.

Defrost the door lock cylinders

Volkswagen recommends the use of genuine Volkswagen spray with lubricating and anti-corrosive properties to de-ice the lock cylinders.

Protection of the underside of the vehicle

The underside of the vehicle is coated to protect it from corrosion and damage. The protective coating on the underside of the vehicle could be damaged when driving. Volkswagen recommends therefore that the protective coating on the underside of the vehicle and on the running gear should be checked regularly and repaired if necessary.

Hollow cavities

All hollow spaces exposed to corrosion are factory-fitted with long-lasting protective coating.

Such coating does not require maintenance. If, due to extremely high temperatures, a small amount of wax is melted, it may be removed using a plastic spatula and benzene.

Clean the engine compartment

The engine compartment of any motor vehicle is a hazardous area → page 225.

The engine compartment must be cleaned by a Volkswagen Dealership or qualified workshop. An incorrect cleaning procedure could possibly remove corrosion protection and damage electrical components, among others. Additionally, water could enter the vehicle interior directly via the plenum chamber → ⓘ.

If the engine compartment is very dirty, we recommend that you always go to a qualified workshop to have it cleaned following correct procedures. Volkswagen recommends using a Volkswagen Dealership for this purpose.

Plenum chamber

- The plenum chamber is located in the engine compartment between the windscreen and the engine and has a perforated cover → Fig. 208. Air from outside is drawn in from the plenum chamber and is passed into the vehicle interior via the heating and fresh air or the air conditioning system.
- Leaves and other loose items must be removed from the cover of the plenum chamber at regular intervals using a vacuum cleaner or by hand.

Sensors, rear view camera lens

Clean the area in front of the sensors or camera with a soft cloth and a cleaning product free of solvents. Observe the installation locations
→ page 7.

WARNING

Dirty or misted windows reduce visibility and increase the risk of accidents and severe injuries.

- Only drive when you have a clear view through all windows.
- Ice, snow and mist must be removed from the inside and outside of all windows.

WARNING

All work in the engine compartment carries the risk of injury, scalding, accidents and fire!

- Before carrying out any work make sure that you are familiar with the requisite procedures and general safety regulations
→ page 225, *Safety guidelines for work in the engine compartment*.
- Volkswagen recommends having the work carried out by a Volkswagen Dealership.

CAUTION

Underseal and anti-corrosion coatings may ignite on the hot exhaust system or on other hot engine parts.

- Never apply underseal or anti-corrosion coatings to the exhaust pipes, catalytic converter, heat shields or other vehicle components that become hot.

NOTICE

- Properly cleaning the windows enhances the window wiper system's performance and preservation.
- Never combine the recommended cleaning agents with other products in the window washer fluid reservoir. This may cause the components to coagulate and, as a result, clog the window wiper nozzles.
- Never use warm or hot water to remove snow and ice from windows and mirrors. This may cause the glass to crack!
- Never use ice scrapers on mirror lens, otherwise the chromed-coated surface will be scratched.

- The heating elements for the rear window heater are located on the inside of the rear window. Never apply stickers over the heating elements and never clean the inside of the rear window with corrosive or acidic detergents or any other chemicals.

NOTICE

To ensure that the chrome and aluminium parts are not damaged:

- Do not clean or polish in direct sunlight.
- Do not clean or polish in sandy or dusty environments.
- Do not use any abrasive care products (e.g. cream cleaners).
- Never clean with hard sponges, rough kitchen sponges or similar products.
- Do not polish dirty surfaces.
- Do not use solvent-based cleaning products.
- Do not use any hard wax.

NOTICE

The wheel covers may also have an additional varnish finish and should not be treated using chrome based preservatives or aluminium polish. Regular paint care and standard cleaning products must be used instead.

NOTICE

Lock de-icers which contain substances which dissolve grease may cause the door lock cylinder to rust.

NOTICE

Water that has entered the plenum chamber via a manual process (e.g. from a high-pressure cleaner) can cause considerable damage to the vehicle.

 Before removing wax with benzene, comply with applicable safety and environment standards regarding such product.

 Considering that when washing the engine, toxic waste water containing oil, grease and fuel may enter the sewerage system, the contaminated water needs to be purified by an oil separator. Therefore, the engine compartment should only be washed in extreme cases and in appropriate locations.

Cleaning and conserving the interior of the vehicle

Modern fabrics, such as dark denim, are often not colourfast. Light-coloured upholstery (soft materials or leather) is particularly sensitive to staining caused by these fabrics, even if you are careful. This is not caused by a fault in the upholstery, but by the non-colourfast nature of the garments.

Leaving stains, dirt and other deposits on the surface of vehicle components and cloth seat covers for a long time can make it difficult to clean and treat them. Stains, dirt and deposits may become impossible to remove, particularly if left for a long time.

Seat covers

Please note the following for handling and conservation of the seat covers:

- Before getting into the vehicle, close all Velcro fasteners that could touch the cloth seat covers and fabric trims. Open Velcro fasteners can cause damage to cloth seat covers and fabric trims.
- Avoid the direct contact of sharp-edged items and accessories to the upholstery and fabric trims in order to prevent damage. Accessories include zips, studs, rhinestones on clothing or belts.
- Dust and grit in the pores and seams should be removed regularly so that no permanent damage is caused to the surface of the seats by scratching.
- Always check whether garments are colourfast to prevent damage to the upholstery. This is especially important for light-coloured upholstery.

Cleaning paddings, fabric and NT - Non microfiber fabric

- Please read and follow the instructions, notes and warnings on the package before using cleaning products.
- Upholstery, fabric trims, NT - non-microfiber fabric trims, and carpeting must be regularly cleaned with a vacuum cleaner (brush tip).
- Do not use high-pressure cleaners, steam cleaners or coolant spray.

- We recommend that you use a soft sponge or commercially available lint-free microfiber cloth for cleaning jobs → ①.
- Clean NT - non-microfiber fabric surfaces with a slightly damp cotton or woollen cloth or a commercially available lint-free microfiber cloth → ①.

General surface soiling of the upholstery and fabric trim can be cleaned with standard foam cleaners.

If the upholstery and fabric trims are generally heavily soiled, consult a Volkswagen Dealership for information on suitable cleaning methods before attempting any cleaning procedure. Take the vehicle to a specialist cleaning company, if necessary.

Padding, fabric and NT - Non microfiber fabric stain treatment

When cleaning stains, it may be necessary to clean the entire surface and not just the stain itself. This particularly applies if the surface shows general signs of wear. The cleaned area could otherwise be lighter than the surrounding area. If in doubt, consult a specialist cleaning company.

Water-based stains (e.g. coffee, fruit juice or soda).

First, clean the stain as quick as possible with a dry and absorbent cloth, to prevent the liquid from penetrating the upholstery. For more difficult stains, moisten the sponge with an atomizer and clean the stain with circular motions. Clean with a dry and absorbent cloth.

Stubborn stains, e.g. chocolate, make-up. Only use detergents that have been approved by Volkswagen. If necessary, take the vehicle to a specialist cleaning company.

Oily stains, e.g. oil, lipstick. Only use detergents that have been approved by Volkswagen. If necessary, take the vehicle to a specialist cleaning company.

Conservation and treatment of natural leather covers

Please contact a Volkswagen Dealership or qualified workshop if you have any questions on cleaning and caring for the leather equipment in your vehicle.

Natural leather is a sensitive material. ▶

- Use a leather cream with sunlight protection and impregnation properties on a regular basis and always after cleaning. The cream nourishes the leather, keeps it breathable and supple and replaces lost moisture. It also protects the surface.
- Leather should be cleaned every two to three months to remove fresh stains.
- Treat the leather with a special leather care product every six months → ⓘ.
- Always apply cleaning and care products extremely sparingly and always use a dry cotton or woollen cloth that is lint free. Do not apply cleaning and care products directly to the leather.
- Remove fresh stains such as ink, ball-point pen ink, lipstick, shoe cream etc. as quickly as possible.
- Look after the pigment. Use a special coloured leather cream to refresh the colour where necessary.
- Wipe off excess with a soft cloth.

Cleaning natural leather covers

Volkswagen recommends that you use a damp cotton or wool cloth for general cleaning purposes.

Do not let the water soak through the leather or soak into the seams.

Please observe the following notes **before cleaning** the leather upholstery → page 267, *Cleaning paddings, fabric and NT - Non microfiber fabric*.

Stubborn stains – Spread the smooth soap solution¹⁾ with a twisted cloth. Absorb by pressing lightly with a dry cloth.

Water-based stains, such as coffee, tee, juice, blood, etc.

Remove the stains while they are still moist with an absorbent cloth. Use a cleaning product appropriate for already dried stains → ⓘ.

Fat based stains, such as oil, lipstick, etc. Remove the stains while they are still moist with an absorbent cloth. Use a cleaning product appropriate for stains that have not yet penetrated the surface → ⓘ.

Special stains, such as biro, felt tip pen, nail varnish, emulsion paint, shoe polish, etc. with a dry and absorbent cloth. Clean with a special stain remover for leather.

Cleaning vinyl covers

Please observe the following notes before cleaning vinyl covers → page 267, *Cleaning paddings, fabric and NT - Non microfiber fabric*.

Only use water and neutral soap to clean vinyl covers.

Cleaning stowage compartments and drink holders

Some stowage compartments and cup holders have a removable rubber insert in the base.

- Moisten a clean, lint-free cloth with water and clean the parts.
- If this does not provide satisfactory results, use a special **solvent-free** plastic cleaning product.

Cleaning the ashtray

- Remove and empty the ashtray.
- Wipe the ashtray with a cloth.

To clean the snuffer, use a toothpick or similar object to pick out the ashes.

Conserving and cleaning plastic parts, wooden decorative elements and the dash panel

- Moisten a clean, lint-free cloth with water and clean the parts.
- Treat *plastic parts (inside and outside the vehicle) and the dashboard* with a special **solvent-free** plastic cleaning and care product approved by Volkswagen → ⚠.
- Treat *wooden trims* with a mild soap solution¹⁾.

Cleaning the seatbelts

The automatic belt will not be able to roll back properly if there is dirt on the belt and thus prevent the seat belt from working properly. ▶

¹⁾ Smooth soap solution: two teaspoons of neutral soap in one litre of water.

Seat belts must never be removed for cleaning purposes.

- Remove dirt with a soft brush → .
- Carefully pull the dirty seat belt right out and leave it out.
- Clean the seat belt with a *mild*¹⁾ soap solution.
- Allow the seat belt fabric to dry completely.
- Do not allow the seat belt to roll up until it has dried completely.

WARNING

Incorrect care and cleaning of vehicle parts can impair the safety features of the vehicle and thus cause serious injuries.

- Vehicle parts must be cleaned according to the manufacturer's instructions.
- Only use approved or recommended cleaning products.

WARNING

Cleaning agents that contain solvents cause the surface of the airbag modules to become porous. In case of an accident that triggers the airbag, loose plastic parts can cause serious injury.

- Never clean the dash panel or the airbag covers with cleansers that contain solvents.

WARNING

Check the condition of all seat belts regularly. Damaged belt bands or any other seat belt parts must be removed and replaced immediately by a Volkswagen Dealership. Damaged seat belts are extremely dangerous and can cause severe or fatal injuries.

- Never use chemical cleaning agents on the seat belts or their components. Additionally, seat belts may not come into contact with corrosive fluids, solvents or sharp objects. This can considerably weaken the bands.
- After cleaning, allow seat belts to dry completely before rolling them up. Otherwise the automatic belt retractors could become damaged and thus impair their function.
- Never let any foreign bodies or liquids enter the seat belt buckle slot. This could prevent the belt buckle and seat belt from working properly.

- Never attempt to repair, modify or remove the seat belts yourself.
- Damaged seat belts must be replaced immediately with new seat belts approved by Volkswagen for your vehicle type. Seat belts subjected to stress and stretched during an accident must be replaced by a Volkswagen Dealership. Replacement may be necessary even if there is no apparent damage. The belt anchorage should also be checked.

NOTICE

- Cleaning agents that contain solvents attack the material and can cause irreparable damages.
- Stains, dirt, and other deposits with corrosive components and solvents may cause irreparable damages to the material, even in case of short exposure periods.
- Stains, dirt and other deposits must be removed as quickly as possible and not allowed to dry in.
- To avoid damage, stubborn stains should be removed by a specialist cleaning company.

NOTICE

- Do not use steam cleaners as the steam pushes the soiling into the fabric and sets it.
- High-pressure cleaners and coolant sprays can damage the upholstery.

NOTICE

- Soft-bristle brushes should be used on carpets and mats only! Other surfaces could be damaged by brushes.
- When washing paste or fine detergent solutions are applied with a damp cloth or sponge, visible edges may appear on the upholstery once it has dried. These edges are usually difficult or even impossible to remove.

NOTICE

- The NT - non-microfiber fabric cannot be drenched in any circumstances.
- Do not use leather care products, solvents, wax polish, shoe cream, stain removers or similar products on NT - non-microfiber fabric. ►

¹⁾ Smooth soap solution: two teaspoons of neutral soap in one litre of water.

- Do not use brushes if cleaning with liquids. This could damage the surface of the material.

NOTICE

- Never use solvents, wax polish, shoe cream, spot removers or similar products on leather.
- A stain cannot be removed if it has been left on the leather for a long time and has penetrated the surface.
- Spilt liquids should be cleaned immediately using an absorbent cloth as the leather surface and seams absorb liquids quickly.
- Protect the leather from excessive sun exposure to prevent fading.

NOTICE

Never use solvents, wax polish, shoe cream, spot removers or similar products on vinyl. These may cause the material to become hard and brittle prematurely.

NOTICE

Some car fresheners have substances in its chemical formula that may damage the structure, surface and paintwork of the vehicle's internal linings.

 Suitable care products are available from a Volkswagen Dealership.

 Volkswagen recommends cleaning stained upholstery in a qualified workshop.

 Slight colour changes of the natural leather covers due to use are normal. ◀

Accessories, modifications, repairs and part replacement

Accessories and spare parts

Volkswagen recommends that you seek advice from a Volkswagen Dealership before purchasing accessories, spare parts or service fluids. For example, if the vehicle is to be retrofitted with accessories or if parts have to be renewed.

Volkswagen Dealerships can recommend accessories, parts and service fluids which are suitable for your requirements.

Volkswagen strongly recommends that you only use approved **Volkswagen Accessories** and **Volkswagen Genuine Parts**. These parts and accessories have been specially tested by Volkswagen for suitability, reliability and safety. Volkswagen Dealerships are also qualified to perform proper installation procedures.

Despite constant monitoring of the market, products **not approved by Volkswagen** cannot be evaluated by Volkswagen in terms of their credibility, safety and suitability for use in the vehicle. Volkswagen can therefore assume no responsibility for these parts, even if they have been approved by an official testing agency or are covered by an official approval certificate.

WARNING

Incorrectly performed repairs or modifications to your vehicle can impair the effectiveness of the airbags, cause operating failures, accidents and fatal injuries.

- Never secure or mount objects such as cup holders, telephone holders and GPS (global positioning system) on or next to the airbag covers or within the deployment zone of the airbag.
- Items which are either on or next to the airbag module covers or are in the deployment zone of the airbags can cause severe or even fatal injuries should the airbags be activated.

WARNING

Unsuitable spare parts and accessories as well as incorrectly carried out work, modifications and repairs can lead to damage to the vehicle, accidents and serious injuries.

- Volkswagen strongly recommends that you only use approved Volkswagen accessories and Volkswagen genuine parts. These parts and accessories have been specially tested by Volkswagen for suitability, reliability and safety.
- Repairs and modifications to your vehicle should only be carried out by a Volkswagen Dealership. Volkswagen Dealerships have the necessary tools, diagnostic equipment, repair information and qualified personnel.
- Never fit parts to your vehicle that are in any way different from the factory-fitted parts.
- Only use wheel/tyre combinations which have been approved by Volkswagen for your vehicle type. ◀

Repairs and technical modifications

Repairs and modifications must always be carried out according to Volkswagen specifications

→ ⚠!

Unauthorised modifications to the electronic components or software in the vehicle may cause faults. As the electronic components are linked together in networks, these faults may indirectly affect the working of other systems. This can seriously impair safety, lead to excessive wear of components, and also compromise the vehicle's operating function.

Volkswagen Dealerships cannot be held liable for any damage caused by technical modifications and/or work performed incorrectly.

The authorised Volkswagen repairer cannot be held liable for any damage caused by technical modifications and repairs performed incorrectly. Such damages are also not covered by the Volkswagen warranty.

Volkswagen recommends that all repairs and technical modifications be performed by an authorised Volkswagen Dealership with **Volkswagen Genuine Parts**.

⚠ WARNING

Incorrect repairs and modifications can cause functional problems and damage to the vehicle and impair the effectiveness of the driver assist systems. This could lead to accidents and severe injuries.

- Repairs and modifications to your vehicle should only be carried out by a Volkswagen Dealership.

Repairs and limitations in the airbag system

Repairs and modifications must always be carried out according to Volkswagen specifications

→ ⚠!

Modifications and repairs to the front bumper, the doors, the front seats, the roof or the bodywork should be carried out by a Volkswagen Dealership. System components and airbag system sensors can be located on these vehicle components.

If you work on the airbag system or remove and install parts of the system when performing other repair work, parts of the airbag system may be damaged. The consequence may be that, in the event of an accident, the airbag inflates incorrectly or does not inflate at all.

Regulations must be observed to ensure that the effectiveness of the airbags is not reduced and that removed parts do not cause any injuries or environmental pollution. Volkswagen Dealerships are familiar with such requirements.

Any modifications to the vehicle's suspension could prevent the airbag system from working properly during a collision. For example, using tyre/ wheel combinations which have not been approved by Volkswagen, lowering the vehicle, making modifications to the suspension rate including work on the springs, struts and shock absorbers can affect the reaction of airbag sensors sending information to the electronic control unit. Some alterations to the suspension springs can, for instance, cause changes to the suspension and consequently affect the reaction of the sensors. This can lead to the airbag system being triggered in collision scenarios where it normally would not be triggered had no modifications been made to the suspension. Other modifications can affect the reaction measured by the sensors, preventing the airbag system from being triggered when it should have been.

⚠ WARNING

Incorrect repairs and modifications can cause functional problems and damage to the vehicle and impair the effectiveness of the airbag system. This could lead to accidents and severe injuries.

- Repairs and modifications to your vehicle should only be carried out by a Volkswagen Dealership.
- Airbag modules cannot be repaired. They must be replaced.
- Never use recycled airbag components or components that have been taken from end-of-life vehicles in your vehicle.

⚠ WARNING

Modifications to the vehicle's suspension, including the use of unsuitable tyre/wheel combinations not approved by Volkswagen may

cause the airbag system to work differently and increase the risk of serious or fatal injuries in the event of an accident.

- Never install any components not approved by Volkswagen in the suspension system that do not have the same characteristics as the original factory-fitted components.
- Never use tyre/wheel combinations that have not been approved by Volkswagen.

 Airbag system parts must never be reused in case of vehicle or component scrapping. All applicable environment disposal standards must be followed, in addition to other safety standards in effect. Volkswagen Dealerships are familiar with such requirements.

Retrofitting two-way radios

You will need an external aerial to use a two-way radio in the vehicle.

Any retrofit installation of electrical or electronic equipment in the vehicle will affect its vehicle type approval. Under certain circumstances, this can negate the type approval for the vehicle.

Volkswagen has approved the vehicle for use with two-way radios providing the following conditions are observed:

- Correct installation of external aerial.
- Maximum transmitting power of 10 watts.

An external aerial is needed to give the equipment its optimal range.

Should a two way radio need to be installed with a transmission power of more than 10 W, contact a specialized company. A qualified workshop is familiar with the technical options for retrofitting. Volkswagen recommends using a Volkswagen Dealership for this purpose.

Please observe legislation as well as the instructions and information given in the operating manuals for radio equipment.

WARNING

If radio equipment is not secured or not properly secured in the vehicle, it could be flung through the interior during a sudden driving or braking manoeuvre, or in the event of an accident. This can cause injuries.

- While the vehicle is in motion, always secure two-way radios properly outside the airbag deployment zones or stow them away safely.

CAUTION

If two-way radios that are not connected to an external aerial are used, electromagnetic radiation in the vehicle could exceed limit values and thus be a health hazard for drivers and other vehicle occupants. This also applies to external aerials which have not been correctly installed.

- Two-way radios should only be used in the vehicle if an external aerial is properly connected.

Information stored in control units

Your vehicle is factory-fitted with control units, such as gearbox and engine control units. The control units also monitor the function of the exhaust system and the airbags.

These electronic control units continuously evaluate data relevant to the vehicle while the vehicle is being driven. Only this data will be stored if there are any faults recorded or any deviations from the specified values. This is generally displayed by the indicator lamps on the instrument cluster.

Special units are required to read and evaluate data stored in the control units.

Under no circumstances do such control units record conversations held inside the vehicle.

Reprogramming control units

All data for the control of components is initially stored in the control units. Some convenience functions, such as lane change flash, single door unlocking and displays, can be reprogrammed using special workshop equipment. If the convenience functions are reprogrammed, the descriptions in your Owner's Manual will no longer correspond with the original functions. Volkswagen recommends requesting reprogramming coverage to the digital warranty and maintenance at a Volkswagen Dealership.

Information about possible reprogramming can be obtained from Volkswagen Dealerships.

Reading the vehicle fault memory

A diagnosis interface for reading the fault memories is located in the vehicle interior → ⚠. Electronic control unit status and operating data is stored in the fault memory. Additional information on stored data can be obtained from your Volkswagen Dealership.

The diagnostics connection is located on the driver's side footwell, near the fuse box.

The fault memory should only be read and reset by a Volkswagen Dealership.

After correcting faults, the respective data is deleted from the fault memory. Other memory contents are successfully updated.

⚠ WARNING

Improper use of the diagnostics connection may lead to operating faults, in addition to severe accidents and injuries.

- Never read the faulty memory through the diagnostics connection yourself.
- The diagnostics connection must only be read by a Volkswagen Dealership.

Using a mobile telephone in the vehicle without a connection to the external aerial

During a telephone call and when in standby mode, mobile telephones transmit and receive radio waves, also known as high-frequency energy. Current scientific literature warns us that radio waves can be harmful to human beings if they exceed certain limits. Government agencies and international committees have introduced threshold values and guidelines to ensure that electromagnetic radiation produced by mobile telephones does not pose a hazard to health. However, there is no proven scientific evidence that demonstrates that cordless telephones are absolutely safe.

For this reason, some experts are calling for a precautionary use of mobile telephones through the application of measures which reduce the level of personal exposure to electromagnetic radiation.

If a mobile telephone which is not connected to the vehicle's external aerial is used inside the vehicle, the level of electromagnetic radiation could

be higher than when the mobile telephone is connected to an integrated aerial or any other external aerial.

If the vehicle is fitted with a suitable hands-free unit which enables the use of innumerable additional functions of Bluetooth® compatible mobile telephones, this will comply with legal requirements in many countries which permit the use of a mobile telephone in a vehicle only if a hands-free unit is used.

Mobile telephones must be located in a suitable telephone holder or be stored securely in the vehicle. If a telephone holder is used it must be securely attached to the base plate. This is the only way to ensure that the mobile telephone is securely attached to the dashboard and always within reach of the driver.

If the mobile telephone is connected to a telephone aerial integrated in the vehicle or to an external telephone aerial, the electromagnetic radiation generated by the telephone that could affect the human body is reduced. Moreover, it improves the quality of the signal.

◀ If a mobile telephone is used in the vehicle interior without this hands-free system, it is not safely secured in the vehicle and also not connected to the vehicle's external telephone aerial. Furthermore, the mobile telephone is not being charged in the telephone holder. It is also likely that the telephone connection will be disrupted and the signal strength will be poor.

A mobile telephone should only be used in the vehicle if it is connected to a hands-free unit. Volkswagen recommends the use of an external aerial when using a mobile telephone in the vehicle.

Bluetooth® is a registered trademark of Bluetooth® SIG, Inc.

⚠ WARNING

If a mobile phone is not secured or not properly secured in the vehicle, it could be flung through the interior during a sudden driving or braking manoeuvre, or in the event of an accident. This can cause injuries. ▶

- Mobile telephones, other devices and telephone accessories such as telephone holders, notepads and GPS (global positioning system) must always be secured properly outside of the airbag deployment zones or be stowed in a safe place whilst the vehicle is in motion.

WARNING

If mobile telephones or two-way radios that are not connected to an external aerial are used, electromagnetic radiation in the vehicle could exceed limit values and thus be a health hazard for drivers and other vehicle occupants. This also applies to external aerials which have not been correctly installed.

- Maintain a minimum distance of 20 centimetres between the mobile phone's antenna and the heart pacemaker, since the former may interfere with the latter.
- Do not carry a mobile telephone in your breast pocket above a pacemaker.
- The mobile telephone must be switched off immediately if there is a suspicion of interference with a pacemaker or other medical devices.

Consumer information

Volkswagen warranty

Volkswagen Dealership Warranty

Volkswagen Dealerships provide a warranty against manufacturing defects for the vehicles sold by them.

Volkswagen Dealerships provide a warranty against manufacturing defects for new vehicles.

Please refer to your purchase agreement for more information on warranty terms and conditions.

For additional information, please contact your Volkswagen Dealership.

The warranty does not cover natural wearing, damages caused by abusive vehicle use, improper maintenance, or unauthorized modifications.

If your vehicle is not operating properly, please contact the nearest Volkswagen Dealership. 

Body warranty

Volkswagen Dealerships grant vehicles they sell a warranty against puncture corrosion on the body.

In addition to the warranty terms for new Volkswagen vehicles, Volkswagen Dealerships also grant on the vehicles they sell – according to the purchase contract – a warranty against perforating body corrosion over a period of time limited to **6 years**.

In case such defects are eventually identified, they will be fully repaired by any Volkswagen Dealership free of charge.

The warranty is voided in the following cases:

- defects result from external influences or lack of proper vehicle maintenance; or
- any body defects are not repaired in a timely fashion, as per the Factory's instructions; or
- corrosion perforations result from noncompliance with the manufacturer's instructions regarding body repairs. 

After conducting due body repair services, your Volkswagen Dealership will confirm due warranty coverage for corrosion perforations in the repaired area.

General information

Volkswagen offers one of the largest and most efficient Dealership Network to assist your vehicle.

Volkswagen Dealerships are equipped with cutting-edge equipment and tools designed especially for your vehicle, in addition to highly-qualified technical personnel and a wide range of vehicle parts.

All Volkswagen Dealerships abide by high-end standards recommended by the Factory. These include Service instructions, which ensure all repair activities are carried out based on optimal quality standards and in a timely fashion, guaranteeing appropriate and safe vehicle conditions.

Volkswagen Dealerships are clearly qualified to service your vehicle. Make sure you don't miss out on all of these amenities.

Additional service offers

Mandatory inspection services

Depending on local laws, the vehicle must be submitted to periodic mandatory inspections.

In several countries, vehicles must be periodically submitted to inspections conducted by competent authorities, duly evidencing its effective and safe traffic operation and/or exhaust system conditions.

Volkswagen Dealerships are aware of all mandatory inspections and duly qualified to perform such verification services, along with an inspection service. This will save you time and money.

They will indicate aspects that require special attention in order to prevent your vehicle from being submitted to new inspections due to faults.

Volkswagen® Genuine Parts

Volkswagen® Genuine Parts are particularly designed for your vehicle and approved by Volkswagen, especially regarding safety measures. These parts accurately comply with Factory specifications regarding type, measurements, and materials. Volkswagen® Genuine Parts are the most suitable for your vehicle. Therefore, we recommend always using Volkswagen® Genuine Parts. Volkswagen does not guarantee the reliability, safety, and suitability of non-original parts.

The most essential Volkswagen® Genuine Parts are virtually always available in stock. If any specific part is not available in stock, it can usually be ordered and received in brief periods of time.

Volkswagen Dealerships offer a warranty for Volkswagen® Genuine Parts after assembly or purchase. Always keep your Volkswagen Dealership invoice for warranty purposes.

For additional information, please contact your Volkswagen Dealership.

Warranty claims regarding these parts can be filed **at any Volkswagen Dealership.**

Original Volkswagen accessories

We recommend using original Volkswagen accessories and other accessories approved by Volkswagen.

Please follow the recommendations below when equipping your vehicle with accessories:

Only use original Volkswagen accessories or other accessories duly approved by Volkswagen, whose reliability, safety, and suitability have been duly tested for the specific vehicle model. Volkswagen does not guarantee the reliability, safety, and suitability of non-original parts.

Volkswagen Dealerships offer a warranty for original accessories after assembly or purchase. Always keep your Volkswagen Dealership invoice for warranty purposes.

For additional information, please contact your Volkswagen Dealership.

In addition to providing accurate and updated information, the Volkswagen Accessories Service also offers optional equipment assembly services by qualified personnel.

In addition, Volkswagen Dealerships offer all appropriate products to maintain and care for your vehicle.

Information stickers and plates

Safety certificates, stickers and plates containing important information on operating the vehicle are factory-fitted in the engine compartment and on certain parts such as the tank flap, front passenger sun visor, the driver door pillar or in the luggage compartment floor.

- Never remove or damage the safety certificates, stickers and plates. They must remain legible at all times.
- If vehicle parts bearing safety certificates, stickers or plates are removed from the vehicle, replacement safety certificates, stickers or plates with the same information must be applied properly to the new parts by Volkswagen Dealership.

Safety certificate

A safety certificate on the door pillar of the driver door provides the information that all necessary safety standards and specifications of the transport safety authorities of the individual country have been met at the time of production. The month and year of production and the chassis number may also be listed.

High voltage warning stickers

There is a sticker near the engine compartment cover lock that provides a warning of the high voltage in the electrical system of the vehicle.

WARNING

Handling the vehicle incorrectly increases the risk of accident and injuries.

- Legal provisions must be followed.
- Consult the Owner's Manual.

NOTICE

Handling the vehicle incorrectly may cause damage to the vehicle.

- Legal provisions must be followed.
- Perform maintenance services as prescribed.

Aerial and radio feed

- ◀ A radio feed aerial is installed on the roof of vehicles with factory-fitted radio units.

 Interference of AM radio reception could occur if electric devices are used in the vicinity of the roof aerial (e.g. mobile phones).

Installing the radio

Follow the recommendations below when retrofitting a radio or replacing a factory-fitted radio:

- In some versions, existing vehicle connections were designed for original Volkswagen radios, as of the model year of 2005.
- Radio devices with different connections will have to use adapting cables, which are available at Volkswagen Dealerships.
- Radios **not** covered in the Volkswagen Original Accessories Programme may require additional adaptors if the signal feed is weak.
- Radios should be installed at a Volkswagen Dealership, whose personnel is qualified and trained on technical specifications of vehicles and if there are original radios and assembly parts required from the Volkswagen Accessories Programme, as well as the fact that all activities are conducted based on factory guidelines.
- The maximum power of original factory-fitted speakers is 20 W (RMS).
- Volkswagen recommends also using speakers, assembly sets, aerials and interference suppression kits of the Volkswagen Accessories Programme. These parts were designed especially for each vehicle type.

WARNING

Never cut the connection wire, leaving it exposed. This may cause fires.

NOTICE

- Different radio connections may destroy or affect important electrical components. Eventual interferences, such as the speed signal, may cause faults in the engine, ABS system, etc.
- Simply connecting the speed signal to a radio with automatic volume adjustment from different manufacturers may cause such faults.

Headphones

When using mobile phones or other devices, consult the respective owner's manual, applicable laws and standards regarding the use of headphones. For example, driving while using headphones is prohibited in Brazil.

⚠ WARNING

When using headphones while driving, exterior acoustic signals, such as police and fire department sirens and other vehicles' horns, may not be audible and may cause accidents.

Approval identifications → Fig. 209:

- ① Argentina.
- ② Brazil.
- ③ Russia and countries that authorize and allow radio transmission systems as per EAC guidelines.
- ④ South Africa.
- ⑤ Europe and countries that authorize and allow radio transmission systems as per European guidelines.
- ⑥ Paraguay.
- ⑦ Zambia.
- ⑧ Mexico.

Declarations of conformity



Fig. 209 Some approval identifications.

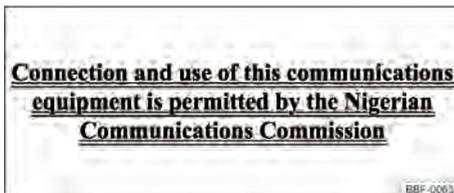


Fig. 210 Tag valid only for Nigeria.

The individual manufacturer declares herewith that the following products comply with essential requirements of each country, among other relevant provisions and laws at the time of vehicle manufacturing:

Radiofrequency equipment

- Electronic immobilizer.
- Vehicle key with remote control.
- Keyless Access locking and starting system.
- Radios with Bluetooth connection.
- Wireless charger.

FCC (Federal Communications Commission)

The following equipment is approved by the FCC under the identification number:

Wireless charger

- 2AHPN-WLC

Refer to the following links for more information:

- <https://fcc.report/FCC-ID/2AHPN-WLC>
- <https://fccid.io/2AHPN-WLC>

VW Play radio

- NT8-VWMIBREGIO

Qi

The wireless charger complies with the Qi ID:10518 protocol.

Qi is an open interface standard that regulates wireless energy transfer using charging by induction developed by the Wireless Power Consortium.

Refer to the following link for more information:

- <https://www.wirelesspowerconsortium.com/products/10518>

South Africa

The VW Play radio is approved by ICASA (Independent Communications Authority of South Africa) under identification number TA-2020/7390.

Argentina

The following equipment is approved by ENACOM (Entidade Nacional de Comunicações) under the identification number:

Wireless charger

– TL01774

VW Play radio

– C-24447

Brazil

Devices activated by radiofrequency comply with all applicable approval and use standards, and their use in vehicles was authorized by the Brazilian National Telecommunications Agency (ANATEL).

Such approval must be used to obtain use licenses in other countries.

Ghana

The VW Play radio is approved by the NCA under identification number 7E5-7M-X0B-RDR.

Jamaica

The VW Play radio is approved by the SMA (Spectrum Management Authority).

Mexico

The VW Play radio is approved by the NOM (Norma Oficial Mexicana) under identification number IFT ID: RCPVIVW20-0478.

Nigeria

The wireless charger and its connection are permitted by the Nigeria Communication Commission → Fig. 210 ARCEP (Autoridade Reguladora para Comunicações Eletrônicas e Correios).

Paraguay

The VW Play radio is approved by CONATEL (Comisión Nacional de Telecomunicaciones) under identification number NR:2020-02-I-0111.

Zambia

The VW Play radio is approved by ZICTA (Autoridade de Tecnologia da Informação e Comunicação da Zâmbia) under identification number ZMB/ZICTA/TA/2020/10/51.

 This equipment is not entitled to protection against prejudicial interference and do not cause interference in duly authorized systems. 

Technical data

Guidelines on the technical data

To check which engine a vehicle is equipped with, refer to the vehicle data sticker and vehicle license documents.

All data in the official vehicle documents take precedence over this data. All data in this manual are valid for the basic model. The figures may be different if additional equipment is fitted, for different models, for special vehicles and for other countries.

Engine

On the vehicle data sticker or in the vehicle documents it can be seen with which engine the vehicle is equipped.

Range

The values quoted here may differ if additional equipment is fitted, for different models or for special vehicles.

The values for the kerb weight in the following table apply for the road-ready vehicle with service fluids, including fuel tank carrying 90% of total capacity and tools and spare tyre, if applicable → ⚠. The indicated gear order weight is increased due to optional equipment and additional accessories installed, which proportionally reduces the maximum permitted load.

The load includes the following weights:

- Passengers.
- All luggage.
- Trailer towing support load.

Performance

Performance figures relate to the basic model. Data may vary according to the local fuel used, optional devices equipped in the vehicle, load, tyre pressure, temperature, altitude, vehicle route and driving habits. These figures were measured without equipment which may influence performance, such as mud flaps.

Gross combination weight

The listed admissible traction ratings are only applicable for altitudes of up to 1,000 m above sea level. The maximum weight of the car and trailer must be reduced by approximately 10% for every further 1,000 m in altitude.

⚠ WARNING

Ignoring or exceeding specific values and limits regarding weights, payloads, vehicle dimensions, and speed limit could result in severe accidents and injuries.

⚠ WARNING

Exceeding the permitted gross weight and axle weights may damage the vehicle and cause severe accidents and injuries.

- Actual axle loads must never exceed permitted axle loads.
- The payload and distribution of the load in the vehicle affect driving response and braking distance. Adjust your speed accordingly.
- Observing maximum weight and axle load limits is essential to ensure the safety of the driver, passengers and other road users.

⚠ WARNING

Accidents and severe injuries can occur if the maximum trailer weight is exceeded.

- Never exceed the specified maximum trailer weight.

ℹ NOTICE

The payload should be distributed as evenly as possible in the vehicle. When transporting heavy objects in the luggage compartment, they should be placed either in front of or over the rear axle in order to minimise the effect on the vehicle's handling.

Information on fuel consumption

The figures quoted for fuel consumption and emissions do not refer to any one individual vehicle. Their purpose is to enable comparisons to be

made between various vehicle types. Fuel consumption does not depend exclusively on the efficiency of the vehicle, but also on the way it is driven and other non-technical factors.

Measuring fuel consumption

The vehicle consumption and emissions values were determined according to directive UE 70/220/EEC in the currently valid version and apply for the given vehicle kerb weight. The figures **do not** refer to any one individual vehicle. Two measuring cycles are carried out on a rolling road test bed to calculate fuel consumption. The test criteria are as follows:

Urban cycle The urban cycle starts with an engine cold start. Thereafter city driving at speeds between 0 and 50 km/h (0 and 31 mph) is simulated.

Extra-urban cycle In the extra-urban cycle the car undergoes frequent acceleration and braking in all gears, as in normal everyday driving. In this case the driving speed ranges from 0 to 120 km/h (0 to 75 mph).

Combined cycle The combined consumption is calculated with a weighting of around 37% for the urban cycle and 63% for the extra-urban cycle.

 Kerb weight may vary according to the respective version. This may slightly increase fuel consumption figures.

 In practical terms, fuel consumption figures may differ from those measured based on the UE 70/220/EEC guidelines.

Vehicle identification data

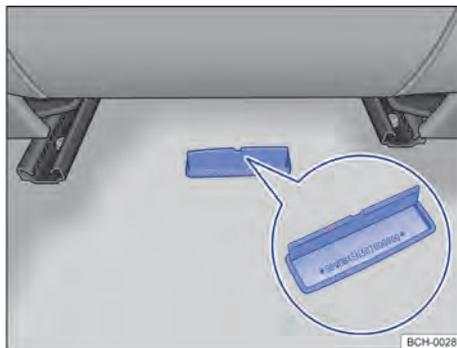


Fig. 211 In front of the rear passenger seat, on the right-hand side of the floor: vehicle identification number (running gear number).

Vehicle identification number (VIN - chassis number)

The vehicle identification number (VIN) engraving is located in front of the passenger seat, on the right-hand side of the floor → Fig. 211.

Partial vehicle identification number (VIS – partial chassis number)

The plates (VIS) are located on the lower area of the front right door pillar and in the engine compartment on the driver side, in the suspension strut. These plates are destroyed when removed.

Additionally, the VIS number is also available in the windscreen, rear window, and side windows.

Engine identification number

The engine identification number is located on the engine block. Open the bonnet to access the manufacturer identification sticker  → page 227.

In some regions, the engine identification number is included in the official vehicle document.

Manufacturer identification sticker

The manufacturer identification sticker is located in the front cross strut in the engine compartment. Open the bonnet to access the manufacturer identification sticker  → page 227.

Manufacturing year identification plate

The manufacturing year identification plate is located on the lower area of the front right door. This plate is destroyed when removed. 

NOTICE

In case it is necessary to replace stickers or re-engage vehicle components, contact a local Volkswagen Dealership.

NOTICE

The plastic layer applied over the vehicle identification number (chassis number) engraving is an anti-corrosive protection that prevents transferring the number into a paper sheet. Therefore, it must not be removed under any circumstances - risk of voiding warranty against perforation due to corrosion!

Information on the air conditioner



Fig. 212 Information on the air conditioning.

Key for → Fig. 212:

- ① Air conditioner lubrication oil specification.
- ② Air conditioner coolant specification.
- ③ Air conditioner load level

Symbol and description:

- ⚠ Warning: air conditioning maintenance can only be carried out by qualified personnel.
- ☀ Engine coolant type.
- ☀ Lubricant type.
- 📖 Check workshop information (only available for Volkswagen Dealerships).

WARNING

To ensure safe and risk-free operation, air conditioning system maintenance procedures may only be carried out by qualified personnel.

Dimensions

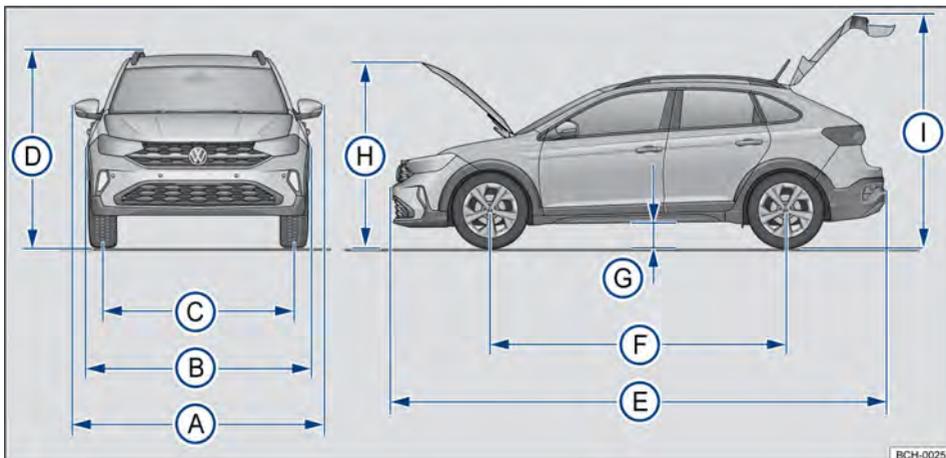


Fig. 213 Dimensions.

Table indications apply for the basic model with basic equipment.

Indicated values may vary due to wheel and tyre sizes, optional equipment, different model versions, or different accessory installations.

Key for → Fig. 213:	
(A)	Vehicle width (including exterior mirrors) 1,976 mm
(B)	Vehicle width (not including exterior mirrors) 1,757 mm
(C)	Front track ^{a)} 1,524 - 1,531 mm
(C)	Rear track ^{a)} 1,509 - 1,516 mm
(D)	Maximum vehicle height (including longitudinal members) ^{b)} 1,527 - 1,531 mm
(E)	Vehicle length 4,266 mm
(F)	Clearance between axles 2,566 mm
(G)	Height of the free gap between the vehicle and the ground ^{b)} 168 - 172 mm
(H)	Height with the bonnet open ^{a)} 1,809 - 1,813 mm
(I)	Height with the tailgate open ^{b)} 2,087 - 2,090 mm
-	Minimum vehicle rotation diameter approximately 10.9 m

^{a)} Data may vary according to wheel and tyre sizes.

^{b)} Weight in gear order, without driver and cargo.

NOTICE

- Drive carefully in parking lots with long kerbs or fixed posts. Objects higher than the ground level may damage the bumper and other vehicle parts when parking.

- Carefully drive through terrain entrances, ramps, kerbs, and other objects. Lowered vehicle parts, such as the bumper, spoiler and chassis, engine or exhaust parts may be damaged in these situations.

Capacities

Petrol engines

	1.0 Petrol 74 kW - TSI	1.0 Petrol 85 kW - TSI
Window washer fluid reservoir (→ page 230)	3.1 litres	
Fuel tank (→ page 206)	approximately 52 litres, of which approximately 7.5 litres reserve ^{a)}	
Engine oil capacity (→ page 232)	4 litres	

^{a)} The reserve will be activated when the total tank level is reduced to approximately 7.5 litres of fuel.

TOTALFLEX Engines

	1.0 TOTALFLEX 85/94 kW - TSI
Window washer fluid reservoir (→ page 230)	3.1 litres
Fuel tank (→ page 206)	approximately 52 litres, of which approximately 7.5 litres re- serve ^{a)}
Engine oil capacity (→ page 232)	4 litres

^{a)} The reserve will be activated when the total tank level is reduced to approximately 7.5 litres of fuel.



Petrol engines

1.0 petrol engine 74 kW - TSI

Power	74 kW (101 hp) at 5,000 rpm
Maximum torque	170 Nm (17.3 kgfm) at 2,000 - 4,000 rpm
EC	DHSE
Cylinders, Displacement	3 cylinders, 999 cm ³
Compression ratio	10,5:1
Spark plugs	04E.905.602.D ^{a)}
Unleaded petrol free from other metallic additives (such as manganese)	Super i.o. 95 Normal i.o. 91 ^{b)}
	<i>Valid only for Argentina</i> Grade 2 or Superior min. 91 ON
Gearbox type	5-gear manual gearbox (MQ 200)
Maximum speed ^{c)}	185 km/h
Acceleration 0 - 80 km/h ^{c)}	6.9 s
Acceleration 0 - 100 km/h ^{c)}	10.5 s
Kerb weight ^{d)}	1,175 kg
Gross axle weight permitted (GWP)	1,610 kg
Gross axle weight permitted in the front axle	850 kg
Gross axle weight permitted in the rear axle	810 kg
Roof load permitted	50 kg
Trailer with brake, gradients up to 8%	400 kg
Trailer without brake, gradients up to 8%	400 kg
Gross combination weight (CMT ^{e)})	2,010 kg
<i>Valid only for Argentina</i> Fuel consumption ^{f)} - Combined Euro 5 and Euro 4 legislation	6.1 l/ 100 km
<i>Valid only for Argentina</i> CO ₂ emissions	139 g/km

- ^{a)} Volkswagen part number. Use only spark plugs recommended by Volkswagen in your vehicle, in order to prevent damages to the engine and ensure compliance with applicable emissions laws.
- ^{b)} With slight reduction in performance and increase in fuel consumption, with graded increase in engine noise until detonation regulation intervention.
- ^{c)} Figures are related to the basic model. Data may vary according to the local fuel used, optional devices equipped in the vehicle, load, tyre pressure, temperature, altitude, vehicle route and driving habits.
- ^{d)} Weight for basic model without optional equipment.
- ^{e)} CMT = vehicle gross combination weight + maximum trailer weight.
- ^{f)} For reasons of vehicle registration and taxation, the fuel consumption of some engines may differ from the following indications in other countries.



1.0 petrol engine 85 kW - TSI

Power	85 kW (116 hp) at 5,500 rpm
Maximum torque	200 Nm (20.4 kgfm) at 2,000 - 3,500 rpm
EC	DHSC
Cylinders, Displacement	3 cylinders, 999 cm ³
Compression ratio	10,5:1
Spark plugs	04E.905.602.D ^{a)}
Unleaded petrol free from other metallic additives (such as manganese)	Super i.o. 95 Normal i.o. 91 ^{b)}
	<i>Valid only for Argentina</i> Grade 2 or Superior min. 91 ON
Gearbox type	6-speed Automatic (AQ 250)
Maximum speed ^{c)}	189 km/h
Acceleration 0 - 80 km/h ^{c)}	7.1 s
Acceleration 0 - 100 km/h ^{c)}	10.5 s
Kerb weight ^{d)}	1,212 kg
Gross axle weight permitted (GWP)	1,650 kg
Gross axle weight permitted in the front axle	890 kg
Gross axle weight permitted in the rear axle	810 kg
Roof load permitted	50 kg
Trailer with brake, gradients up to 8%	400 kg
Trailer without brake, gradients up to 8%	400 kg
Gross combination weight (CMT ^{e)})	2,050 kg
<i>Valid only for Argentina</i> Fuel consumption ^{f)} - Combined Euro 5 and Euro 4 legislation	6.6 l/ 100 km
<i>Valid only for Argentina</i> CO ₂ emissions	151 g/km

- a) Volkswagen part number. Use only spark plugs recommended by Volkswagen in your vehicle, in order to prevent damages to the engine and ensure compliance with applicable emissions laws.
- b) With slight reduction in performance and increase in fuel consumption, with graded increase in engine noise until detonation regulation intervention.
- c) Figures are related to the basic model. Data may vary according to the local fuel used, optional devices equipped in the vehicle, load, tyre pressure, temperature, altitude, vehicle route and driving habits.
- d) Weight for basic model without optional equipment.
- e) CMT = vehicle gross combination weight + maximum trailer weight.
- f) For reasons of vehicle registration and taxation, the fuel consumption of some engines may differ from the following indications in other countries.

TOTALFLEX engines

1,0 85/94 kW - TSI TOTALFLEX engine

Power	Petrol	85 kW (116 hp) at 5,500 rpm
	Ethanol	94 kW (128 hp) at 5,500 rpm
Maximum torque	Petrol	200 Nm (20.4 kgfm) at 2,000 - 3,500 rpm
	Ethanol	
EC	DHSB	
Cylinders, Displacement	3 cylinders, 999 cm ³	
Compression ratio	10,5:1	
Spark plugs	04E.905.602.F ^{a)}	
Gearbox type	6-speed Automatic (AQ 250)	
Maximum speed ^{b)}	Petrol	188 km/h
	Ethanol	192 km/h
Acceleration 0 - 80 km/h ^{b)}	Petrol	7.0 s
	Ethanol	6.7 s
Acceleration 0 - 100 km/h ^{b)}	Petrol	10.4 s
	Ethanol	10.0 s
Kerb weight ^{c)}	1,221 kg	
Gross axle weight permitted (GWP)	1,640 - 1,650 kg	
Gross axle weight permitted in the front axle	890 kg	
Gross axle weight permitted in the rear axle	810 kg	
Roof load permitted	50 kg	
Trailer with brake, gradients up to 8%	400 kg	
Trailer without brake, gradients up to 8%	400 kg	
Gross combination weight (CMT ^{d)})	2,040 - 2,050 kg	

^{a)} Volkswagen part number. Use only spark plugs recommended by Volkswagen in your vehicle, in order to prevent damages to the engine and ensure compliance with applicable emissions laws.

^{b)} Figures are related to the basic model. Data may vary according to the local fuel used, optional devices equipped in the vehicle, load, tyre pressure, temperature, altitude, vehicle route and driving habits.

^{c)} Weight for basic model without optional equipment.

^{d)} CMT = vehicle gross combination weight + maximum trailer weight.



Abbreviations

Abbreviation	Definition
A	Amp; electrical current measurement unit.
A/h	Ampere-hour.
A2DP	Audio transmission technology via Bluetooth® common in many manufacturers (Advanced Audio Distribution Profile).
ABS	Anti-lock brake system.
AM	Amplitude modulation (medium wave, MW).
AQ 250	6-speed automatic gearbox TSI engine.
ARCEP	Regulatory Authority for Electronic Communication and Post Office (L'Autorité de Régulation des Communications Electroniques et des Postes)
AUX	Auxiliary audio input.
AVRCP	Audio source remote control technology via Bluetooth® common in many manufacturers (Audio Video Remote Control Profile).
bar	Pressure unit.
BAS	Brake assist
BCM	Body Control Module.
CDM	Engine code.
cm ³	Cubic centimetres. Unit of displacement.
CO	Carbon monoxide.
dB	Decibel, unit adopted to measure sound.
DIN	German Institute for Standardisation.
EBV	Electronic brake variator.
ECE	Economic Commission for Europe-Regelung.
EDS	Electronic differential lock.
ENACOM	National Communication Entity
EON	Enhanced Other Network.
EPC	Engine management system (Electronic Power Control).
ESC	Electronic stability control.
ESS	Emergency brake lights (Emergency Stop Signal).
FCC	Federal Communications Commission.
FM	Frequency modulation (ultra short wave, UKW)
GALA	Adjustment of the volume in relation to the vehicle's speed.
GRA	Cruise control system.
GSM	Global System for Mobil Communications.
HFP	Hands-Free-Profile.
hp	Horsepower, engine power.
IMEI	Serial number for the exclusive identification of the GSM (International Mobile Station Equipment Identity) end devices.
kg	Kilogram, mass unit of the International System of Units.
kPa	Kilopascal, standard pressure and tension unit of the International System of Units.

Abbreviation Definition

kW	Kilowatt, engine power.
l	Litre, capacity unit of the metric system.
LED	Light Emitting Diode.
m	Metre, length measurement unit of the International System of Units.
mm	Millimetre, length unit equal to one thousandth of a metre.
MP3	Audio file compression format.
MQ 200	5-speed manual transmission.
Nm	Newton metres, unit of engine torque.
°C	Celsius Degrees; temperature measurement unit.
PIN	Personal identification number.
psi	Pounds per Square Inch, tyre pressure information.
Qi	Open interface standard that regulates wireless energy transfer using charging by induction developed by the Wireless Power Consortium.
RDS	Radio Data System for additional services (Radio Data System - RDS).
rpm	Engine revolutions per minute.
s	Seconds, basic time measurement unit of the International System of Units.
SIM	Subscriber Identity Module.
SMS	Short Message Service
TCS	Traction control system.
TFT	Thin-film transistor display technology.
TSI®	Turbo charged with direct fuel injection.
TWI	Trade Wear Indicator.
UMTS	Mobile network standard (Universal Mobile Telecommunications System).
USB	Universal Serial Bus
V	Volts, electrical difference of potential measurement unit.
VBR	Variable bit rate.
VIN	Chassis number (Vehicle Identification Number).
VIS	Partial vehicle identification number with the last 8 digits of the running gear (Vehicle Indicator Section).
W	Watts, mechanical or electrical, thermal flow and energy flow of radiation measurement unit.
WMA	Audio file compression format.
XDS	Extension of the electronic differential lock.

Index

Numbers and Symbols

1,0 85/94 kW - TSI TOTALFLEX engine

286

1.0 petrol engine 85 kW - TSI

285

A

ABS

see Brake assist systems 144

ACC

see Adaptive Cruise Control (ACC) 116

Accessories

270

Access the service deadline

24

Acoustic alarms

light 75

Acoustic warning

unfastened seat belt 31

Active Info Display

15, 16

information profiles 15, 17

Adaptive Cruise Control (ACC)

116

adjust 120

driving scenarios 117

radar sensor 118

system limitations 118

troubleshooting 121

turn on and off 119

Additional service offers

275

Adjust

front seat 70

Adjusting

correct sitting position 29

head rest 73

steering wheel 69

Aerial

276

Air-conditioner

AUTO (automatic mode) 88

Air-conditioning

air recirculation mode 86, 89

Airbag

crash detection function 41

Airbag system

38

curtain airbags 44

dash panel cleaning 267

description 40

differences among front passenger front air-

bag systems 39

front airbag 41

function 40

indicator light 39

limitations 271

repairs 271

side airbags 43

switching off the passenger front airbag 42

switching off with the key activated switch 42

using child seats 42

vehicle conservation 267

wooden ornamental elements 267

Airbag System

in case of airbag triggering 41

Air conditioner

turn off 86, 88

water underneath the vehicle 91

water vapour underneath the vehicle 91

window heating 86, 89

Air conditioning

85, 86, 88

air distribution 86, 89

air recirculation mode 90

blower 86, 89

Climatronic controls 88

controls 86

cooling mode 86, 88

operating failure 90

operating instructions 90

temperature setting 86, 88

tips 90

Air recirculation mode

air-conditioning 86, 89

operation 90

switch off 90

Alarm system

interior monitoring system 64

risk of false alarm 64

Alertness detection system

malfunction 23

Alterations

271, 276

AM

163

Ambient lighting

79

Android Auto™

connect 162, 190

disconnect 163

end connection 191

main menu 162

menu 190

particularities 163

specificities 191

Anti-lock brake system (ABS)

144

Anti-theft alarm system

63

description 63

Antifreeze

235

Anti theft coding

156

App-Connect

160

main menu 161

Apple CarPlay™

disconnect 162

end connection 190

establish connection 161, 190

menu 161, 190

particularities	162	BAS	
specificities	190	see Brake assist systems	144
App store	189	Battery	
basic functions	189	check vehicle battery	238
download	189	replacing the battery in the vehicle key	56
Areas with risk of explosion		Battery electrolyte	240
phone	174	Belt height adjuster	36
Assemblies and insertions	271	Belt tensioner	
Assistance systems		disposal	37
blind spot sensor	130	service and disposal	37
Assist systems		blind spot monitor	
Adaptive Cruise Control (ACC)	116	system limits	130
anti-lock brake system (ABS)	144	Blind spot monitor	
Automatic Post-Collision Braking System	145	troubleshooting	132
brake assist (BAS)	144	turn off	131
driving mode selection	112	turn on	131
Electronic Differential Lock (EDL)	145	Blind spot sensor	130
electronic stability control (ESC)	146	operation failure	130
Electronic Stability Control (ESC)	144	Bluetooth	
Front Assist	121	audio function	187
Lane Assist	125	connect	187
lane keeping assist	125	phone function	187
Park Assist	139	profiles	174
park distance control	135	settings	181
parking aid	139	Bluetooth Audio	
rear view camera system	137	see External audio sources	172
semi-automated driving assistance (Travel Assist)	128	Body warranty	274
speed limiter	115	Bonnet	
Start-Stop system	102	display indication	229
Traction control system (TCS)	146	warning lamp	229
traction control (TCS)	144	Boot lid	65
Tyre monitoring systems	243	check boot lid	65
Tyre Pressure Loss Indicator	243	emergency opening or closing	66
uphill assist systems	110	opening	65
		unlocking	65
Assumptions		Brake	
rear view camera system	138	brake support system	144
Automatic belt retractor	37	emergency brake indicator	54
Automatic consumer deactivation	241	handbrake	134
Automatic driving light control	76	Brake assist (BAS)	144
Automatic gearbox	106	Brake fluid	237
blockage of the ignition key	99, 101	specification	237
driving	108	Brake light bulb	215
Kick-down function	108	Brake pad	
Pulling away uphill	108	run-in	95
shifting gear	106	Brake pad run-in	
stopping on uphill slopes	108	also see brakes	95
Automatic Post-Collision Braking System	145	Brakes	
Automatic washing system	262	brake fluid	237
AUX-IN		brake pad run-in	95
see External audio sources	172	brake pads	95
AUX-IN multimedia port		brake servo	95
see External audio sources	172	changing brake fluid	237
		fault	98
B		Brake servo	95, 144
Balance	182	Brake support system	144

Brake support systems	144	Chassis number	280
ABS	144	Checkboxes	158
BAS	144	Checking and refuelling	225
EDS	144	Checklist	
ESC	144	before working in the engine compartment	227
TCS	144	changing bulbs	214
XDS	144	checks when fuelling	27
Brake system	144	check the engine oil level	232
check brakes	98	fill engine oil	232
troubleshooting	98	in an emergency	54
Bulb failure		in case of faults	54
see Exterior lighting	213	lifting the vehicle with the jack	258
Buttons	157, 158	preparations for changing a wheel	256
		preparations for travel	27
		safe driving	27
		seat belts	34
		travels abroad	27
		Checks when fuelling	27
		Check the engine oil	232
		Childproof lock	53
		Child seat	
		airbag sticker	48
		securing systems	46
		securing with the seat belt	51
		securing with Top Tether	51
		switching off front passenger front airbag	42
		weight classes	46
		Child seats	45
		child seat types	46
		standard	46
		transporting children in the vehicle	47
		Cleaning	
		see Vehicle conservation	262
		Clean the display	156
		Clock	23
		Close	
		doors	59
		tank flap	206
		windows	67
		Clothing hook	151
		Coming Home function	77
		Connection	
		USB	171
		without wires	170
		with wires	170
		Conservation	
		see Vehicle conservation	262
		Conservation of aluminium parts	264
		Conservation of the chrome parts	264
		Consumables	229
		Consumer information	274
		Control	
		RADIO	163
		Control and indications on the radio	26
C			
Call lists	179		
Call voice mailbox	178		
Capacities			
engine oil	233, 283		
fuel tank	207, 283		
washer fluid reservoir	283		
windscreen washer reservoir	230		
Caring for the vehicle			
cleaning the window wiper blades	212		
replacing window wiper blades	212		
window aerial	276		
Car phone	272		
Carrier			
see Roof carrier	197		
Catalytic converter	208		
operating failure	210		
Central locking	59		
central locking button	61		
description	60		
Keyless Access	58		
locking or unlocking from inside	61		
single door unlocking	60		
Central locking system			
anti-theft alarm system	63		
Centre arm rest	74		
Changing a wheel	255		
lifting the vehicle	257		
preparation actions	256		
wheel bolts	257		
Changing bulbs			
checklist	214		
in the bodywork	215		
preparation actions	214		
rear lights	215		
Changing gears			
gear change indication	92		
manual gearbox	104		
selecting gears (manual gearbox)	104		
Changing the wheel			
after changing a wheel	259		
changing the wheel	259		

Control light			
fuel level	17		
fuelling	17		
Control list			
before using the unit for the first time	153		
rear view camera system	138		
Controls	157		
additional displays	160		
basic control information	157		
checkboxes	158		
display keypad	159		
enter	159		
entry mask	159		
function surfaces	158		
Phone	173		
PHONE	176		
scroll	159		
scroll bar	159		
search lists	159		
touchscreen	158		
Control units	272		
reprogramming	272		
Convenience closing			
electric windows	67		
Convenience functions			
reprogramming	272		
Convenience opening			
electric windows	67		
Convenience overview	153		
Coolant			
check engine coolant	234		
Copyright			
information	182		
Copyrights	166, 186		
Cornering light	76		
with engaged reverse gear	76		
Crash detection function			
airbag	41		
Cruise control system	113		
Cruise control system (GRA)			
operation	114		
crystal waxing the paintwork	262		
Cup holder	151		
front centre console	152		
Cup holders			
beverage bottles	151		
Curtain airbags			
see Airbag system	44		
D			
Dashboard			
airbag system	38		
Dash panel			
airbag system	267		
cleaning	267		
Dash panel insert			
indicators	25		
menu structure	25		
operation by way of the multifunction steering wheel	25		
Dash panel insert operation	25		
Data recording	272		
Data recording while driving	272		
Date setting	181		
Daytime running light	75, 76		
Declarations of conformity	277		
Defrosting			
windows	87, 89		
Device overview	157, 184		
Diagnostics connector	273		
Differential lock			
see Electronic Differential Lock (EDL)	145		
Digital clock	23		
digital instrument cluster			
see Active Info Display	16		
Digital instrument cluster			
see Active Info Display	15		
Dimensions	282		
Display	15, 16, 19, 20, 156, 157		
clean	156		
controls	158		
instrument cluster	19, 20		
Display indicators			
doors, bonnet and boot lid open	19, 20		
speed limiter	115		
time	23		
Display keypad	159		
Disposal			
belt tensioner	37		
Doors	59		
childproof lock	53		
emergency closing or opening	61		
Driver alert system	22		
function	22		
operation	22		
turn off	22		
turn on	22		
Driver door			
overview	8		
Driving			
data records	272		
driving economically	93		
driving through water on roads	97		
fuel gauge	17		
fuel level too low	18		
parking on downhill inclines	133		
parking on uphill inclines	133		
preparations for travel	27		
pulling away uphill	108		
stopping on uphill slopes	108		
through salt water	97		

Entry mask			
see Controls		159	
Environmental impact note			
fuel	205, 207		
EON		287	
EPC - Electronic engine power control		208	
ESC			
enable and disable		146	
see Braking Support Systems		146	
ESS - Emergency Stop Signal		54	
Ethanol		206	
fuel gauge		17	
Exhaust gas emission control system		207	
Exterior			
door handles		6	
Exterior lighting		213	
Exterior mirrors		83	
fold		83	
memory for reverse gear		83	
operation failure		84	
towing a trailer		201	
Exterior temperature indicator	19, 20		
External aerial		272	
External audio source			
adjust playback volume		182	
External audio sources			
AUX-IN multimedia port		172	
Bluetooth audio		172	
USB connection		171	
External data carrier			
USB connection		171	
External jump starting			
check Jump starting		222	
external mirrors			
vehicle conservation		264	
F			
Fader		182	
Fault memory		273	
Faults			
protect the vehicle		53	
Favourites (speed dial buttons)		180	
Fire extinguisher		55	
First service		260	
Fixation with i-Size		49	
Fixation with ISOFIX			
child chair		49	
Fixation with LATCH		49	
FM	163, 287		
Frequency range			
AM		163	
change	158, 163		
FM		163	
select	158, 163		
Front airbag			
check airbag system		41	
Front Assist		121	
critical warning		123	
distance warning		123	
initial warning		123	
see Front Assist		121	
troubleshooting		124	
Front Assist peripheral monitoring system			
Front Assist system limits		123	
Front passenger airbag			
check airbag system		38	
Front passenger side glove compartment light		79	
Front seat		70	
fuel			
Ethanol		206	
Fuel		204	
environmental impact note	205, 207		
information on fuel consumption		279	
petrol		206	
problems		209	
Fuel consumption			
driving economically		93	
how to measure?		279	
information		279	
what increases consumption?		210	
Fuel gauge		17	
control light		17	
petrol or ethanol		17	
Fuel handling safety guidelines		204	
Fuelling			
checks when fuelling		27	
control light		17	
ethanol		206	
fuel gauge		17	
petrol		206	
with ethanol		206	
with petrol		206	
Fuelling and fuel types		205	
Fuel quality		210	
Fuel tank ventilation system		209	
Function buttons			
MEDIA main menu		168	
PHONE main menu		176	
RADIO main menu		163	
Function surfaces		158	
controls		158	
Fuses		216	
changing	221, 222		
colour coding		221	
dash panel		217	
detecting a blown fuse		222	
engine compartment		219	
fuse box in the dashboard		218	
fuse box in the engine compartment		220	

iPod	171	instruments and switches lighting	78
ISOFIX	49	Leaving Home	77
J		light's switch	75
Jump starting	222	side light	75, 76
grounding point	223	switch off	75
jump starting point (grounding point)	223	switch on	75
K		turn signal lever	75
Key		lighting	
see vehicle key	56	Turn signals	75
Key activated switch		Lighting	
switching off the passenger front airbag	42	daytime running light	76
Keyless Access	58	Driving light	75
starter button	99	main beam	77
Unlock or lock with Keyless Access	58	parking light	77
Keyless Access Locking and starting system		troubleshooting	78
see Keyless Access	58	Lights	75
Keyless locking and starting system Keyless Access	58	AUTO	76
Keypad		Limiters	
see Controls	159	see Speed limiter	115
Kick-down function	108	Load capacity index	253
L		Loading	
Lambda probe	208	driving with the rear lid open	96
Lamp		luggage compartment	195
interior lights	79	roof carrier	198
reading lights	79	stowing items of luggage	195
Lane Assist	125	towing	201
sensor system	126	Locking	
system limits	126	with Keyless Access	58
Lane keep assist		Locking button	
activate	126	automatic gearbox	106
deactivate	126	Locking the front passenger door and rear doors	
Lane Keep Assist		in case of emergency	62
indicator lamp	126	LOW BATTERY	156
Lane keeping assist	125	Luggage compartment	195
Lane Keeping Assist		cover	196
Troubleshooting	127	luggage compartment light	79
LATCH		Luggage compartment cover	196
child chair	49	M	
Leave a parking space with Park Assist	142	Main indicator	17
Leaving Home function	77	Main menu	
Lifting the vehicle		Android Auto™	162
checklist	258	App-Connect	161
jack	257	MEDIA	168
with the jack	257	PHONE	176
Light		RADIO	163
acoustic alarms	75	Maintenance	260
Coming Home	77	malfunction	
daytime running light	75	park distance control	135
functions	76	Malfunction	
headlight lever	75	alertness detection system	23
		immobiliser	102
		tyre monitoring system	244
		Mandatory inspection services	275
		Manoeuvre braking	136

Manual gearbox	104	Mobile phone	
indicator and warning lamp	105	use without external aerial	273
see also Changing gear	104	Modifications	271
see also Shift gears	104	Multi Collision Brake	
trouble shooting	105	see Automatic Post-Collision Braking System	145
Mats	92	Multifunction displays	21
Mechanical windows		Multifunction steering wheel	9, 25
close	67	Multimedia playback	
open	67	SD card	171
Media	186	Multimedia port	171
copyrights	186		
file and database requirements	186		
media controls	186		
media operation	187		
settings	191		
MEDIA			
audio data structure	168		
audio file CD	167		
AUX-IN multimedia port	172		
bitrate	167		
Bluetooth audio	172		
change media source	169		
Change track	169		
copyrights	166		
displays	168		
external data carrier to USB	171		
forward and back	169		
function buttons	168, 169		
iPod, iPad, iPhone	171		
limitations	167		
main menu	168		
media mode	166		
media source selection menu	169		
Mix function	169		
MP3 files	167		
playback mode	169		
playback sequence	168		
playlists	167		
prerequisites	167		
Repeat function	169		
SD card	170		
select data storage unit	169		
select track	170		
settings	170		
WMA files	167		
Menu			
Apple CarPlay™	161		
Mileage recorder	16		
Mirror			
areas with no visibility	82		
blind spot	82		
Mirrors	81, 82		
exterior	83		
folding	84		
interior mirror	82		
right-hand exterior mirror operation	83		
Mix function	169		
		N	
		New engine	97
		Noises	
		brake assist system	146
		engine	100
		tyres	255
		NT - non microfiber fabric	267
		Number of seats	28
		O	
		Octane number	206
		Odometer	15
		Oil	
		check engine oil	230
		Oil dipstick	232
		Old tyres	246
		Open	
		doors	59
		tank flap	206
		windows	67
		Opening	
		boot lid	65
		Open radio stations list	158
		Operating failure	
		air conditioning	90
		catalytic converter	210
		radio feed	276
		rain sensor	81
		Operation	
		park distance control	135
		turn on and off	157
		Operational failure	
		electric windows	67
		Operation failure	
		blind spot sensor	130
		electric exterior mirrors	84
		Original Volkswagen accessories	275
		Other applicable documents	153
		Overall guidelines	27
		Overseas	
		extended permanence	98
		vehicle sales	98

Overview	157	Petrol engine	284
centre console	10	Phone	
driver door	8	phone controls	173
driver's side	9	PHONE	
front passenger side	11	A2DP	174
front view	6	areas with risk of explosions	174
indicator lamps	12	Bluetooth profiles	174
instruments	15, 16	Bluetooth settings	181
menu structure	25	call lists	179
rear view	7	call voice mailbox	178
roof headliner	11	contacts	178
turn signal and main beam lever	75	contacts list	178
warning lamps	12	during a phone call	177
Overview of the vehicle		enter phone number	178
front view	6	favourites (speed dial buttons)	180
rear view	7	function buttons	176
P		HPF	174
Park Assist	139	main menu	176
automatic interruption	140	mobile phone pairing	175
early interruption	140	operation description	174
in line parking	141	pairing the mobile phone up	175
leave a parking space	142	phone controls	176
parking conditions	141	select	178
park side by side	141	settings	180
troubleshooting	142	special precaution areas	174
Park distance control	135	switching off phone controls	175
operation	135	symbols and displays	177
Park Distance Control		user profile settings	181
representation on the display	136	Phone function	
trouble shooting	136	during phone calls	188
Parking	133	making phone calls	188
with the Park Assist system	141	receiving phone calls	188
Parking aid	139	Physical principles of a frontal collision	32
Parking and manoeuvring	133	Plates	276
Parking distance control		Playback	
using high pressure washing machine	262	AUX-IN	172
Park Pilot		external data carrier (USB)	171
see Park distance control	135	MEDIA	168
Particularities		memory card	168
Android Auto™	163	track	170
Apple CarPlay™	162	Playing	
remove the key from the vehicle	99, 101	RADIO	163
water vapour underneath the vehicle	91	Plenum chamber	264
Part replacement	270	Polishing	262
Passenger compartment	9	Pollen filter	91
Passenger front airbag		Pollutant filter	91
switching off with the key activated switch	42	Pop-up window	158
Pedals	30, 92	Post-operation (timeout)	157
Peripheral monitoring system (Front Assist)		Power management	156
Operate	124	Pre-tuning buttons	165
Petrol	206	Preparation actions	
additives	206	changing a wheel	256
fuel	206	changing bulbs	214
fuel gauge	17	vehicle battery	239
types	206		

Preparation activities		
check the engine oil	232	
complete engine oil	232	
prior each travel	27	
working in the engine compartment	227	
Preparation procedures		
check engine coolant level	235	
refilling the engine coolant	235	
Preparations for travel	27	
Prerequisites		
for CDs	167	
for files and data storage units	167	
for SD cards	167	
for USB data storage units	167	
Press & Drive		
see Keyless Access	58	
Q		
Quick access screens	185	
R		
Radar sensor	118	
Radio	185, 276	
control	26	
indication	26	
open radio stations list	158	
radio operation	185	
settings	191	
RADIO		
changing frequency ranges	163	
displayed radio station names	164	
displays and symbols	165	
function buttons	163, 165	
main menu	163	
pre-tuning buttons	165	
radio data system RDS	164	
radio text (RDS)	164	
SCAN	166	
settings	166	
station buttons	164	
Radio buttons	158	
Radio feed		
aerial	276	
operating failure	276	
Radio stations		
pre-tuning	165	
Radio text (RDS)		
see RDS	164	
Rain sensor	80	
operating failure	81	
RDS	164	
radio text	164	
regional RDS	164	
station names	164	
Reading light	79	
Rear lid		
driving with the rear lid open	96	
Rear lights		
changing bulbs	215	
Rear seat	71	
Rear seat backrest		
fold backwards	71	
fold forward	71	
Rear seats	71	
Rear Traffic Alert	143	
Rear View		
see Rear view camera system	137	
Rear view camera system	137	
assumptions	139	
control list	138	
Enabling and disabling	137	
operational guidelines	139	
parking	138	
Representation on the display	137	
settings	139	
Rear window defrost function	87, 89	
Rear window wiper blade		
cleaning	212	
replacing	212	
Reduction of exhaust gases		
problems	209	
Removing ice	264	
Removing snow	264	
Removing wax residues	264	
Renew bulbs		
see Exterior lighting	213	
Repairs	270, 271	
airbag system	271	
plates	276	
stickers	276	
Repeat	169	
Repeat function	169	
Replacement key		
see vehicle key	56	
Representation on the display		
Park Distance Control	136	
Reprogramming control units	272	
Retrofitting		
car phone	272	
two-way radio	272	
Rev counter	16	
Right-hand exterior mirror operation	83	
Rims		
cleaning	264	
Roll-back function		
electric windows	67	
Roof carrier	197	
Usage guidelines	199	
Roof rack	198	
use the supports	198	

Rotary knobs	157	Seat functions	74
Rubber seals	264	Seats	28, 70
Run-in		front seat	70
tyres	247	Selection of driving mode	
Running-in		characteristics of driving modes	112
engine	97	Selection of the driving mode	
first kilometres	97	manoeuvre	112
		operation	112
S		Selector button	158
Safety equipment	40	Selector lever lock	
Safety recommendations	154	automatic gearbox	106
SCAN		Select (phone number)	178
radio	166	Semi-automated driving assistance	
RADIO	166	refer to Travel Assist	128
Screen		Service	260
settings	191	Service fluids	229
Scroll	159	Service interval display	24
Scroll bar	159	Service menu	23
SD card		Service position	
compatibility and technical data	167	Windscreen wipers	212
eject or insert	170	Service scopes	261
prepare to remove	170	Set	
prerequisites	167	hour	23
supported SD files	167	Settings	181
unreadable	170	Bluetooth	181
SD card slot	170	factory settings	181
Search lists	159	media	170
Seat	71	PHONE	180
Seat belt		radio	166
automatic belt retractor	37	system	181
seat belt status indicator	31	user profile	181, 194
warning lamp	31	valet mode	193
Seat belt roll-back function	37	volumes	182
Seat belt routing	35	Shifting gear	
Seat belts	30	automatic gearbox	106
belt height adjuster	36	emergency unlocking the selector lever	109
belt routing	35	shifting gears (automatic gearbox)	106
checklist	34	with the Tiptronic	107
cleaning	267	Shifting gears	
fastening	34	warning and indicator lamps	109
not fastened	32	Shift paddle	
roll-back function	37	Tiptronic	107
seat belt tensioner	37	Side airbags	
twisted seat belts	34	see Airbag system	43
unfastening	34	Side light	75, 76
using	34	Side light bulb	215
Seat belts protect	33	Single door unlocking	60
Seat belt tensioner	37	Sitting	
Seat covers	267	adjusting the head rests	73
cleaning NT - non microfiber fabric	267	adjusting the steering wheel position	69
cleaning the fabric cover	267	correct sitting position	29
cleaning the padding	267	fitting the head rests	73
conserving and cleaning the natural leather	267	number of seats	28
seat cover handling	267	rear seat backrest	71
vinyl	267	removing the head rests	73

Sitting position			
incorrect position		29	
Sliding headliner		84	
Socket		152	
12 Volts		152	
Softkeys			
see Function surfaces		158	
Sounds			
warning lamps and indicator lamps		12	
Sound settings		182	
Spare fuel canister		205	
Spare parts		270	
Spare wheel		251	
remove		251	
Special precaution areas		174	
Specificities			
AUX playback		172	
displays		160	
engine jolting		209	
folding mirrors		84	
irregular engine operation		209	
parking	133,	282	
radio feed		276	
towing a trailer		202	
Speed index		254	
Speed limiter		115	
controls		115	
display indicators		115	
troubleshooting		116	
Start-Stop system		102	
indicator lamp		103	
Start-Stop System		102	
Start button			
emergency shut down		102	
emergency start function		102	
Starter button		99	
Starting the engine with jump leads			
how to		223	
jump leads		223	
Station			
SCAN		166	
scanning for stations		166	
Station buttons		164	
Station names			
see RDS		164	
Steering			
indicator lamp		111	
warning light		111	
Steering assistance		111	
Steering wheel		69	
adjusting		69	
unilateral traction		250	
vibration		250	
Stickers		276	
Stopped in traffic			
protect the vehicle		53	
Storage compartment			
glasses compartment		150	
roof console		150	
Stowage area			
front centre console		148	
front passenger side		149	
glove compartment		149	
Glove compartment light		79	
in the lower part of the centre console		148	
vehicle wallet		149	
Stowage compartment		147	
front centre armrest		150	
Stowage compartments			
other stowage compartments		151	
Stowing items of luggage		195	
Sun visor		84	
Support load			
loading the trailer		201	
Support systems			
cruise control system		113	
driver alert system		22	
electronic brake variator (EBV)		144	
GRA		113	
interval recommendation		22	
Symbol entry mask		159	
Symbols			
see Indicator lamps		12	
see Warning lamps		12	
Synchronize vehicle key		57	
System			
ABS		144	
anti-lock brake system (ABS)		144	
settings		191	
Systems			
automatic driving light control		76	
BAS		144	
brake assist (BAS)		144	
cruise control system		113	
EBV		144	
EDL		145	
electronic brake variator(EBV)		144	
Electronic Differential Lock (EDL)		145	
GRA		113	
TCS		144	
traction control (TCS)		144	
Uphill assist system		110	
XDS		145	
T			
Tachometer (Rev counter)		17	
Tank flap			
check tank flap		206	
ethanol		206	
petrol		206	

TCS		technical requirements	200
enable and disable	146	things to note	224
see brake assist systems	144	towing a trailer	202
see Braking Support Systems	146	trailer load	201
Technical data	279	Towing a trailer	
1,0 85/94 kW - TSI TOTALFLEX engine	286	check towing	199
1.0 petrol engine 74 kW - TSI	284	Towing bracket	
1.0 petrol engine 85 kW - TSI	285	retrofitting	203
capacities	207, 230, 233, 283	Tow starting	224
dimensions	282	things to note	224
engine oil specification	231	Tow starting and towing	
identification sticker	280	towing	225
petrol engine	284	Track list	170
roof load	198	Traction	253
TOTALFLEX engines	286	Traction control system (TCS)	146
type plate	280	Traction control (TCS)	144
tyre pressure	248	Trailer load	
Vehicle data sticker	280	loading the trailer	201
Technical modifications	271	Transporting	195
plates	276	driving instructions	96
stickers	276	driving with the rear lid open	96
Temperature display		Hooks to hang bags on	197
engine coolant	18	loading the trailer	201
Temperature indicator		roof carrier	197, 198
exterior temperature	19, 20	stowing items of luggage	195
Temporary spare wheel		towing	199
driving instructions	251	towing a trailer	202
Temporary spare wheel of different size from the regular wheels	256	Transporting children in the vehicle	45, 47
Text entry		Travel Assist	128
see Controls	159	display indicators	128
Thawing the door lock cylinder	264	troubleshooting	129
Thawing the locks	264	turn on and off	129
Things to note		Travels abroad	
towing	224	checklist	27
tow starting	224	Tread depth	249
Tightening torque		Tread depth and wear indicators	249
wheel bolts	257	Treadwear	253
Timeout	157	Troubleshooting	63, 66, 109
Time setting	181	12 V vehicle battery warning lamp	242
TIN	252	Adaptive Cruise Control (ACC)	121
Tiptronic	107	airbag deployment	63
Toolkit		airbags system	39
check vehicle toolkit	210	alternator warning lamp	242
TOTALFLEX engines	286	Auto Lock	63
Towing	199, 224, 225	blind spot monitor	132
a trailer	202	braking support systems	146
connecting	201	check engine oil level	234
emergency breakaway cable	200, 201	cruise control system (GRA)	114
engaging	201	driving mode selection	113
exterior mirrors	201	Trouble shooting	
headlight adjustment	202	engine management	102
loading	201	Troubleshooting	
rear lights	200, 201	engine oil level sensor	234
retrofitting a towing bracket	203	engine oil pressure	234
support load	201	faulty bulb	216
		Front Assist	124

front passenger front airbag disabled	40	Unlock	
front passenger front airbag enabled	40	with Keyless Access	58
ignition lock	102	Uphill assist system	110
immobiliser	102	USB	
indicator lamp of the driver door	63	connecting an external data carrier	171
Keyless Access	63	iPad controls	171
Lane Keeping Assist	127	iPhone controls	171
Trouble shooting		iPod controls	171
manual gearbox	105	supported USB data storage units	167
Troubleshooting		USB connection	171
Park Assist	142	disconnect the connection	171
Trouble shooting		unreadable	171
Park Distance Control	136	USB port	148
Troubleshooting		USB Port	150
re-establishing the one touch closing and opening operation of the windows	68	User profile	
Start-Stop system	104	settings	181
start button	102	VWPlay	194
steering	111		
turn signals	59, 63	V	
Turn off		Valet mode	
radio	157	VW Play	193
Turn on	157	Valve caps	249
Turn signal and main beam lever	75	Vehicle	
Turn signal light bulb	215	locking or unlocking from inside	61
Turn signals on/off	75	protection in case of faults	53
Turn the main beam on and off	77	stopping on downhill inclines	133
Two-way radio	272	stopping on uphill inclines	133
Type plate	280	unlocking or locking with Keyless Access	58
Tyre control indicator		Vehicle battery	238
change the tyres	247	automatic consumer deactivation	241
Tyre damage	250	battery electrolyte	240
Tyre load capacity	254	charging	240
Tyre monitoring system	243	check electrolyte level	239
indicator lamp	244	connecting	240
malfunction	244	discharged	55
Tyre Pressure Loss Indicator	243	discharging	241
Tyre pressure	248	disconnecting	240
checking	249	installation location	238
Tyre Pressure Loss Indicator	243	meaning of warnings on the vehicle battery	238
Tyre Pressure Monitoring System		preparation actions	239
change the tyres	247	replacing	240
Tyres		starting the engine with jump leads	223
check wheels and tyres	243	symbol definition	238
see wheels and tyres	245	Vehicle battery (12 V)	
Tyres with directional tread pattern	254	grounding point for jump starting	223
Tyre wear	250	Vehicle conservation	262
Tyre wear indicators	250	aluminium parts	264
		automatic washing system	262
		chrome parts	264
		cleaning the seat belts	267
		cleaning the wheels	264
		dash panel	267
		engine compartment	264
		exterior	262
		external mirrors	264
		fabric covers	267
U			
UKW	287		
UNIT	163		
unit operation	163		
Unit code			
see Anti-theft coding	156		

high pressure washing machine	262	Volume	
hollow cavities	264	AUX-IN	182
interior	267	Bluetooth audio	182
manual wash	262	define external audio sources	182
natural leather	267	maximum volume when turning the device	
NT - non microfiber fabric	267	on	182
paddings	267	traffic report	182
paintwork of the vehicle	262	Volume control	157
plastic components	267	VW Play	184
rubber seals	264	welcome	184
seat cover handling	267		
thawing the door lock cylinder	264	W	
vehicle underbody protection	264	Warning lamp	
washing the vehicle	262	bonnet	229
windows	264	brake system	146
windscreen wipers service position	212	braking support systems	146
wooden ornamental elements	267	seat belt	31
Vehicle data sticker	280	switching gears	109
Vehicle delivery	260	Warning lamps	
Vehicle identification data	280	overview	12
Vehicle identification number	280	Warning light	
Vehicle jack	255	engine coolant	18
Vehicle key	56	Warning lights	53
replacement key	56	Warning triangle	55
replacing the battery	56	Washer fluid	
see vehicle key	56	check	230
troubleshooting	57	replenish	230
unauthorized	102	Washing	262
Vehicle maintenance		manual	262
airbag module (dash panel)	267	with high pressure washing machine	262
cleaning the stowage compartment	267	Washing the vehicle	262
vinyl	267	folding mirrors	84
Vehicle modifications	270	What happens to passengers who have not fastened their seat belts	32
plates	276	Wheel	
stickers	276	shift paddle (Tiptronic)	107
Vehicle sale	4	Wheel bolts	255, 257
Vehicle sales		tightening torque	257
in other countries / continents	98	Wheels	248
Vehicle toolkit	210	bolted-on trims	248
Vehicle tool kit		identification	248
contents	211	Wheels and tyres	243, 245
Vehicle toolkit		avoiding damages	246
stowage	210	changing a wheel	255
toolkit access	210	check wheels and tyres	246
Vehicle underbody protection	264	foreign bodies in the tyre	250
Vehicle wallet compartment	149	identification	252
Ventilation	86, 88	markings	252
Ventilation and heating system		new tyres	247
controls	86, 88	old tyres	246
temperature setting	86, 88	replacing tyres	247
Voice command		run-in	247
Android Auto™	163	serial number	252
Apple CarPlay™	162	spare wheel	251
Volkswagen Dealership Warranty	274	speed index	253, 254
Volkswagen® Genuine Parts	275	storing the removed wheel	251

storing tyres	246
technical data	252
Temporary spare wheel of different size from	
the regular wheels	256
tread depth	249
tyre damage	250
tyre identification number (TIN)	252
tyre load capacity	254
tyre pressure	248
tyres with directional tread pattern	254
tyre types	252
tyre wear	250
tyre wear indicators	250
unbalanced wheels	250
valve caps	249
wheel alignment fault	250
wheel balancing	250
wheel rotation	246
wheels	248
winter tyres	254
Wi-Fi	
connect	188
forget network	188
Window activation	67
Windows	
defrosting	87, 89
see Window activation	67
Window washers	79
Window wiper blades	212
cleaning	212
replacing	212
Window wipers	79
automatic headlight washing system	80
functions	80
heatable windscreen washer nozzles	80
rain sensor	80
Window wipers / rear window	
windscreen / rear window wiper lever	79
Windscreen / rearwindow washers	
windscreen / rear window washers lever	79
Windscreen wiper blades	
cleaning	212
replacing	212
Windscreen wipers	
lifting the wiper arms	212
malfunction	81
service position	212
swing the wiper arms outward	212
Windscreen wipers and washers	
trouble shooting	81
Winter driving	
fuel consumption	94
Winter tyres	254
speed limit	255
Wireless charging function	148
Wrench icon	24

X

XDS

see Brake support systems

145

Volkswagen Brazil works continuously to develop and improve all its vehicles. Please understand that we must therefore reserve the right to alter any part of the vehicle and its equipment or technical specifications at any time. The data provided concerning scope of delivery, appearance, performance, dimensions, weights, fuel consumption, standards and vehicle functions are all correct at the time of going to print. Some of the equipment described might not yet be available in a particular vehicle (information can be provided by your local Volkswagen Dealership), and some equipment may not be available in certain countries. No legal commitment may be inferred from the information, illustrations or descriptions in this manual.

No part of this manual may be entirely or partially reprinted, reproduced or translated without the written permission of Volkswagen do Brasil.

All rights under the copyright laws are expressly reserved by Volkswagen do Brasil. Subject to alteration and amendment.

Printed in Brazil.

© **2024 Volkswagen do Brasil**



Manual printed in paper bleached without the use of chlorine.

Owner's Manual:
Nivus
Stand: 16.02.2024 |
Englisch: 11.2024
Artikel-Nr.: 25A.5L1.NIV.20